INMETRO Intertek ETL SEMKO SON SONCAP TS16949 ISO14001 ISO9001 OHSAS18001

Guangzhou Tiger Head Industrial Co.,Ltd.

广州市虎头实业有限公司
GUANGZHOU TIGER HEAD INDUSTRIAL CO.,LTD.
地址：广州市海珠区工业大道北132号
Add.:NO.132,North Gongye Road,Haizhu District,China
Tel:020-85556969
Fax:020-85539959
Website:http://www.gztigerhead.com

555® TigerHead®

Power Sports

Batteries

- ATV
- JETSKI
- MOTORCYCLE
- SNOWMOBILE
- LAWN & GARDEN

COMPANY INTRODUCTION

Guangzhou Tiger Head Industrial Co., Ltd is the backbone enterprise of Tiger Head Group, with a long history traced back to 1928.

As a large government-owned company, Tiger Head Industrial focuses on diversified development and makes huge investment in R&D, purchasing, producing and marketing. Now we deal with various products including lead acid storage batteries, solar products, lighting products, polymer li-lion batteries, jump starters, battery electric appliances, battery raw material, tomato paste, baby diapers, etc.

We pay much attention to quality. All products are under strict quality control in every process from raw material purchasing to final product testing. With high quality and good service, we win our customers' faith and our products sell well in the world, especially in Africa, Middle East, Asia, South America, Europe, etc.

Tiger Head Industrial and its parent company Tiger Head Battery Group share some famous brands, such as "Tiger Head", "555", "TIHAD", "Lighting", "funmily", "Wivin", etc.

Tiger Head Industrial devotes to strengthening our brands and continuing to develop excellent products. We optimize allocation of resources globally and build core competitiveness, striving to realize a win-win business with our partners.

Look forward to the future, with your trust and support, Tiger Head Industrial continues to develop excellent products and offering the best service. Let's work together, embrace a flourishing future!

DESIGNATION OF BATTERY TYPE NUMBERS

Examples:

Conventional Flooded Battery Part Number									
	6	N	4		—	2	A	—	5
	12	N	9		—	4	B	—	1
	12	N	12	A	—	4	A	—	1
	a	b	c	d		e	f		g

High Performance Flooded Battery Part Number									
	L	50	—	N	18	L	—	A	2
S	LB	14				L	—	B	2
	LB	16	A			L	—	A	2
n	h	j	d	b	i	e		f	g

Dry Charged VRLA (AGM) Maintenance Free Battery Part Number									
	LT	X	7			L	—	B	S
	LT	X	20		H	L	—	B	S
	LT	X	14	A	H	L	—	B	S
	k	m	i	d	m	e		g	l

Factory Activated VRLA (AGM) Maintenance Free Battery Part Number									
	LT		14	A	—	3			
	LT	Z	10			4			
	EB	Z	12		—	4			
	k	m	i	d		e			

Designations:

a - nominal voltage
b - vented type (normal type)
c - battery capacity at 10 hour rate
d - indication of different size of the same capacity batteries
e - polarity location (see Fig. 1), configuration
f - location of opening for exhaust (see Fig. 2)
g - type of terminal
h - symbol of High Performance Flooded batteries
i - performance level
j - cranking or starting power
k - symbol of Leoch maintenance free (VRLA) batteries (LT, EB)
l - sealed, non-spillable
m - high performance
n - with sensor

Polarity Location (Figure. 1)

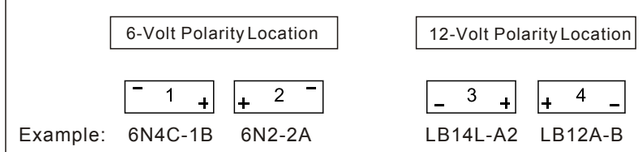

Polarity Location (L indicates positive terminal is located at right side of battery)

Exhaust Location (Figure. 2)

" f "=Location of opening for exhaust port

Metric Conversion Chart

1 inch = 25.4 millimeters	1 pound = .45 kilograms	1 liter= 33.8 ounces
1 ounce = .03 liters	1 millimeter = .04 inches	1 kilogram = 2.2 pounds

TERMINAL CONFIGURATIONS

Terminal shapes vary from one battery to another. By identifying the correct replacement battery from the listing in this book, you the proper terminal configuration. For custom applications, refer to the following chart to identify terminal shape and corresponding batteries.

TERMINAL				BATTERY TYPE
TYPE	FRONT	SIDE	TOP	
A				LTX4L-BS, LT4AL-BS, LTX5L-BS, LTX7A-BS, LTX7L-BS, LTX9-BS, LTX10L-BS, LTX12-BS, LTX12L-BS,LTX14-BS, LTX14L-BS, LTX14AH-BS, LTX14AHL-BS, LTX15-BS,LTX15L-BS, LTX16-BS,LTX16L-BS, LT16CL-BS, LTX18-BS,LTX18L-BS, LTX20-BS, LTX20L-BS, LTX20CH-BS, LTX20H-BS, LTX20HL-BS, LTX20HL-BS-PW ,LTX24H-BS,LTX24HL-BS, EBX4L-BS,EBX5L-BS,EBZ5L-BS, EBZ6L-BS, EBX7L-BS, EBX7A-BS,EB7B-BS, EBZ7L-BS, EBX9-BS, EB9B-BS, EBX10L-BS, EBZ10-BS,EBZ12-BS, EBZ14-BS, EBX12L-BS, EBX12-BS, EB12A-BS, EB12B-BS, EBX14L-BS, EBX14-BS, EB14B-BS, EBX14AHL-BS, EBX14AH-BS,EBX15L-BS, EBX15-BS, EBX16L-BS, EBX16-BS, EB16B-BS, EB16BL-BS, EBX18L-BS, EBX18-BS, EBX20L-BS, EBX20-BS, EBX20HL-BS,EBX20H-BS, EBX20CH-BS, EBX24HL-BS,EBX24H-BS, EBX30L-BS, EBX30-BS, LT4-3, LT4A-3,LT5-3, LT7-3, LT7A-4,LT7B-4, LTZ7-3,LT9-4, LT9B-4, LT10-3, LTZ10-4, LT12A-4, LT12B-4, LT12-3, LT12-4, LTZ12-4, LT14-3, LT14A-4, LT14-4, LT14A-3, LT14B-4, LTZ14-4, LT15-3,LT15-4, LT16-3, LT16-4,LT16C-3,LT18-3,LT18-4, LT20-3, LT20-4,LT20H-3, LT20H-4, LT20CH-4,LT24-3, LT24-4, LT30-3,LT30-4, EB4-3,EB5-3,EBZ5-3, EB7-3, EB7A-4, EB7B-4,EBZ7-3, EB9-4, EB9B-4, EB10-3,EBZ10A-4, EB12-3, EB12-4, EB12A-4,EB12B-4, EBZ12A-4, EB14-4, EB14A-3,EB14A-4, EB14B-4, EB14C-3, EB14C-4, EBZ14A-4, EB15-3, B15-4, EB16-3,EB16-4, EB16B-3,EB16B-4, EB18-3, EB18-4, EB20-3,EB20-4, EB20H-3, EB20H-4, EB20CH-4, EB24-3, EB24-4, EB30-3,EB30-4, 12N4-3B,12N5-3B2, 12N7E-B, 12N7-3A2,12N7-3B2, 12N7-4A2, 10N10-3B-1,LB4L-B, LB4L-A, LB5L-B2, LB7L-A2, LB7L-B2, LB7-A2, LB9L-A2,LB9L-B2, LB12AL-A1, LB12C-A, LB16B-A,LB16C-B, LB16CL-B, L50-N18L-A3,LB30L-B, LB30CL-B, EBZ6-3, LTX7-BS, EBZ12L-BS, EB5.5-3,EB7D-4,EB8-4,EBX8-BS,EBX14AH-BS-PW,EB16BL-BS-PW,EBX20HL-BS-PW
B				LT3L-BS, LT3-3, LT7E-4,6N6-3B, 6N6-3B-1, B39-6, B49-6,B38-6A, 6N11-2D,6LB11-2D, 6N11A-1B, 6N11A-3,6N11A-4, 6N11A-3A, 6N11A-3B, 6N11A-4A, B54-6, B54-6A, 12N3-3A,12N5-3B, 12N5-4B, 12N5.5-3B, 12N5.5-4A-1,12N5.5-4B, 12N6-3B, 12N6-4B, 12N6.5-3B, 12N7-3A, 12N12A-4A-1(J), 12N7-3B, 12N7-4A, 12N7-4B, 12N7D-3B,12N7A-3A, 12N7B-3A, 12N7A-4A, 12N7B-4A, 12N9-3A, 12N9-3A-1, 12N9-3B,12N9-4B-1, 12N10-3A, 12N10-3A-1,12N10-3B, 12N11-3A, 12N11-3B,12N12-3A, 12N12-3B, 12N12A-4A-1, 12N14-3A, 12N16-3A, 12N16-3B,12N16-4B, 12N18-3, LB3L-A, LB3L-B,LB5L-B,LB6.5L-B, LB7-A, LB7L-A, LB7L-B, LB7B-B, LB9-B, LB9L-B, LB9A-A,LB10L-B, LB12A-A, LB12A-B, LB12AL-A,EB12AL-A, LB12AL-A2*,LB14L-A, LB14A-A1, LB16-B, LB16L-B, LB16L-A2 , LT5AL-BS,LT7D-BS,LT7DL-BS,LT9A-BS,LT5A-3-1,LT7D-3,LT7D-4,LT9A-4,LTX6.5L-BS,LT7E-3
				LT6.5-3
				12N5.5A-3B
C				LT24-3-1, 12N18-3-1,12N18-3A, 12N18-3B, LB16B-A1**,HLB16A-A, HLB16A-AB, L50-N18L-A,L50-N18L-A2, SL50-N18L-A, SL50-N18L-A2, SL50-N18L-AT, L50-N18A-A, LB18-A,LB18L-A, LB18L-A2, 12N18-4A
D				12N6.5B-4B, 12N10-3A-2, 12N11-3A-1, 12N14-3B, 12N14-3A2,LB10L-A2, LB10L-B2, LB10A-A2,LB12B-B2, LB14-A2, LB14-B2, LB14L-A2, LB14L-B2, SLB14L-A2, SLB14L-B2,LB14A-A2, EB14L-A2
E				LTX16-BS-1, LT16A-4, 12N7C-3D, 12N7CZ-3D, LB7C-A,LB14L-A1,EBX16-BS-1,EB16A-4
				LB16B-A2
F				12N5.5-4A, LB9L-A1, LB16AL-A2
G				EBX20PL-BS, EB20P-3, 12C16A-3A, 12C16A-3B,L60-N24-A, L60-N24L-A, L60-N24AL-B, SL60-N24AL-B,L60-N28L-A, L60-N30L-A, L60-N30-A, L60-N30L-B, U1-5, U1R-5,U1-6, U1R-6, U1-7,U1R-7, U1-9,U1R-9, U1-11,U1R-11,EB20P-3-1
				12N24-3, 12N24-4, 12N24-3A, 12N24-4A
H				CHD4-12
I				LTR4A-BS, LTR4A-5
J				LT4B-BS, LT4B-5

* * Includes terminal adaptor for converting to side mount.

* Includes terminal adaptor for converting to top mount.

BATTERY FEATURES

LT Series Dry Charged VRLA(AGM) Maintenance Free Battery(PP)

LT Series Factory Activated VRLA(AGM) Maintenance Free Battery(ABS)

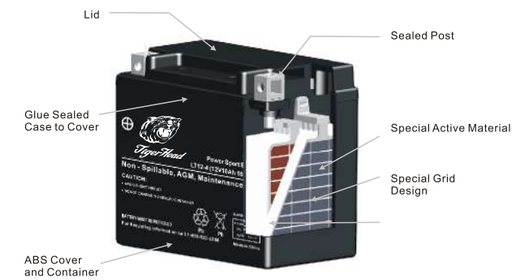

EB Series Maintenance Free Battery(PP)

Flooded Battery(PP)

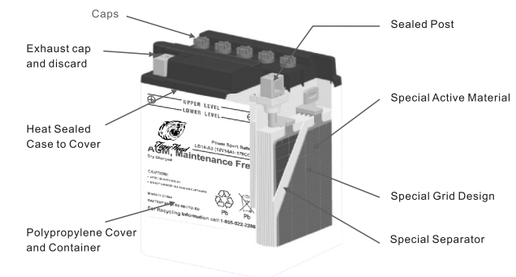

MX Series Factory Activated VRLA (AGM) Maintenance Free Battery (PP)

Maintenance-Free AGM/VRLA Battery

This batteries are constructed with lead calcium alloy and absorbed glass mat technology to provide you with “ total maintenance-free” operation. No spills, no leaks, no water to check. This design will provide you with the most powerful, hightest amp hour capacity, longest cycle-life product on the market. In addition,the fiberglass mat separators and high cell compression extend battery life by delivering superior vibration resistance from engine abuse or extreme road conditions.

Flooded Lead-acid Battery

In most cases, this battery was the original equipment battery provided by your equipment manufacturer. The leoch conventional battery meets or exceeds the original specifications for starting and amp hour capacity. Heavy duty glass mat separators resist vibration damage and through-the-wall intercell connectors minimize internal resistance for maximum power. Quick remove vent and transparent case will make checking electrolyte levels easy.

MX POWERSPORT BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	CCA 0℉ (-18℃) A	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Standard Factory Activated Battery	Dry Charged Battery	Regular Charge Current
				Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)									
				L	W	H	L	W	H			Kg	Lbs	Substitutions		A
MX9-4	12	8	120	150	87	105	5 7/8	3 2/4	4 1/8	+/–	N	3.1	6.8	LT9-4	EBX9-BS	0.8
MX12-4	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8	+/–	N	4.1	9.0	LT12-4	EBX12-BS	1.0
MX14-3	12	12	230	150	87	145	5 7/8	3 2/4	5 6/8	–/+	N	4.7	10.4	LT14-3	EBX14L-BS	1.2
MX14-4	12	12	230	150	87	145	5 7/8	3 7/16	5 6/8	+/–	N	4.7	10.4	LT14-4	EBX14-BS	1.2
MX15-3	12	13	240	134	89	164	5 2/8	3 2/4	6 4/8	–/+	N	5.3	11.7	LT14A-3	EBX14AHL-BS	1.3
MX15-4	12	13	240	134	89	164	5 2/8	3 8/16	6 4/8	+/–	N	5.3	11.7	LT14A-4	EBX14AH-BS	1.3
MX16-3	12	19	350	175	100	155	6 7/8	4	6 1/8	–/+	N	7.5	16.5	EB16B-3	EB16BL-BS	1.9
MX16-4	12	19	350	175	100	155	6 7/8	3 15/16	6 1/8	+/–	N	7.5	16.5	EB16B-4	EB16B-BS	1.9
MX18-3	12	20	340	205	90	162	8 1/8	3 2/4	6 3/8	–/+	N	7.8	17.2	LT24-3	EBX24HL-BS	2.0
MX20-3	12	18	310	176	87	154	6 7/8	3 7/16	6 1/8	–/+	N	6.6	14.5	LT20H-3	EBX20HL-BS	1.8
MX30-3	12	30	440	169	131	175	6 5/8	5 3/16	6 7/8	–/+	N	10.1	22.2	LT30-3	EBX30L-BS	3.0

MAINTENANCE FREE BATTERY

LT SERIES DRY CHARGED VRLA(AGM) MAINTENANCE FREE BATTERY(PP)

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	CCA 0℉ (-18℃) A	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Electrolyte		Total Weight for Battery	Regular Charge Current
				Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)										
				L	W	H	L	W	H			Kg	Lbs	Volume Liters	Weight Kg	Kg	A
6LT4-BS	6	4	N/A	70	70	95	2 3/4	2 3/4	3 3/4	–/+	/	0.67	1.5	0.1	0.17	0.84	0.4
LT2.5L-BS	12	2.5	25	80	70	105	3 1/8	2 3/4	4 1/8	–/+	/	0.92	2.0	0.2	0.21	1.13	0.3
LT2.5L-BS-1	12	2.5	20	80	70	105	3 1/8	2 3/4	4 1/8	–/+	/	0.80	1.8	0.2	0.22	1.02	0.3
LT3L-BS	12	3	35	98	56	110	3 7/8	2 1/4	4 3/8	–/+	B	0.96	2.1	0.2	0.23	1.19	0.3
LTR4A-BS	12	2.3	45	113	48	85	4 7/16	1 7/8	3 3/8	+/–	I	0.82	1.8	0.1	0.16	0.98	0.2
LT4B-BS	12	2.3	40	113	38	85	4 4/8	1 2/4	3 3/8	+/–	J	0.78	1.7	0.1	0.14	0.92	0.2
LTX4L-BS	12	3	50	113	70	85	4 7/16	2 3/4	3 3/8	–/+	A	1.20	2.6	0.2	0.22	1.42	0.3
LT4AL-BS	12	4	60	120	70	92	4 6/8	2 3/4	3 5/8	–/+	A	1.29	2.8	0.2	0.27	1.56	0.4
LTX5L-BS	12	4	70	113	70	105	4 4/8	2 3/4	4 1/8	–/+	A	1.47	3.2	0.2	0.30	1.77	0.4
LT5AL-BS	12	5	75	120	60	130	4 3/4	2 3/8	5 1/8	–/+	B	1.52	3.3	0.3	0.36	1.88	0.5
LTX6.5L-BS	12	6.5	105	139	66	100	5 2/4	2 2/4	4	–/+	B	1.88	4.1	0.3	0.38	2.26	0.7
LTX7A-BS	12	6	90	150	87	93	5 7/8	3 2/4	3 5/8	+/–	A	2.04	4.5	0.3	0.45	2.49	0.6
LTX7-BS	12	6	110	113	70	130	4 4/8	2 3/4	5 1/8	+/–	A	1.99	4.4	0.3	0.41	2.40	0.6
LTX7L-BS	12	6	85	113	70	130	4 7/16	2 3/4	5 1/8	–/+	A	1.99	4.4	0.3	0.41	2.40	0.6
LT7D-BS	12	7	115	146	60	130	5 6/8	2 1/4	5 1/8	+/–	B	1.90	4.2	0.4	0.47	2.37	0.7
LT7DL-BS	12	7	90	146	60	130	5 6/8	2 3/8	5 1/8	–/+	B	1.90	4.2	0.4	0.47	2.37	0.7
LTX9-BS	12	8	120	150	87	105	5 7/8	3 2/4	4 1/8	+/–	A	2.48	5.5	0.4	0.56	3.04	0.8
LT9A-BS	12	9	120	135	75	139	5 3/8	2 15/16	5 4/8	+/–	B	2.46	5.4	0.5	0.61	3.07	0.9
LTX10L-BS	12	10	160	135	90	145	5 5/16	3 9/16	5 11/16	–/+	A	2.84	6.3	0.7	0.88	3.72	1.0
LTX12-BS	12	10	180	150	87	130	5 14/16	3 7/16	5 2/16	+/–	A	3.16	7.0	0.6	0.75	3.91	1.0
LTX12L-BS	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8	–/+	A	3.16	7.0	0.6	0.75	3.91	1.0
LTX14-BS	12	12	200	150	87	145	5 14/16	3 7/16	5 11/16	+/–	A	3.50	7.7	0.6	0.86	4.36	1.2
LTX14L-BS	12	12	200	150	87	145	5 7/8	3 7/16	5 11/16	–/+	A	3.50	7.7	0.6	0.86	4.36	1.2
LTX14AH-BS	12	12	210	135	90	164	5 5/16	3 9/16	6 7/16	+/–	A	3.74	8.2	0.7	0.89	4.63	1.2
LTX14AHL-BS	12	12	210	135	90	164	5 5/16	3 9/16	6 7/16	–/+	A	3.74	8.2	0.7	0.89	4.63	1.2
LTX15-BS	12	13	230	175	87	130	6 7/8	3 7/16	5 1/8	+/–	A	3.76	8.3	0.7	0.90	4.66	1.3
LTX15L-BS	12	13	230	175	87	130	6 14/16	3 7/16	5 2/16	–/+	A	3.76	8.3	0.7	0.90	4.66	1.3
LTX16-BS	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16	+/–	A	4.08	9.0	0.8	0.99	5.07	1.4
LTX16L-BS	12	14	230	150	87	161	5 14/16	3 7/16	6 5/16	–/+	A	4.08	9.0	0.8	0.99	5.07	1.4
LTX16-BS-1	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16	+/–	E	4.05	8.9	0.8	0.99	5.04	1.4
LT16CL-BS	12	19	260	175	100	175	6 14/16	3 15/16	6 14/16	–/+	A	5.17	11.4	1.0	1.27	6.44	1.9
LTX18-BS	12	18	250	205	87	162	8 1/16	3 7/16	6 3/8	+/–	A	5.07	11.2	1.1	1.45	6.52	1.8
LTX18L-BS	12	18	250	205	87	162	8 1/16	3 7/16	6 6/16	–/+	A	5.07	11.2	1.1	1.45	6.52	1.8
LTX20-BS	12	18	270	175	87	155	6 7/8	3 7/16	6 1/8	+/–	A	4.73	10.4	0.9	1.17	5.90	1.8
LTX20L-BS	12	18	270	175	87	155	6 14/16	3 7/16	6 2/16	–/+	A	4.73	10.4	0.9	1.17	5.90	1.8
LTX20CH-BS	12	18	270	150	87	161	5 7/8	3 7/16	6 5/16	+/–	A	4.54	10.0	0.8	1.08	5.62	1.8
LTX20H-BS	12	18	310	175	87	155	6 14/16	3 7/16	6 2/16	+/–	A	4.91	10.8	0.9	1.17	6.08	1.8
LTX20HL-BS	12	18	310	175	87	155	6 7/8	3 7/16	6 1/8	–/+	A	4.91	10.8	0.9	1.17	6.08	1.8
LTX20HL-BS-PW	12	18	300	175	87	175	6 14/16	3 7/16	6 14/16	–/+	A	4.98	11.0	0.9	1.17	6.15	1.8
LTX24H-BS	12	21	350	205	87	162	8 1/16	3 7/16	6 3/8	+/–	A	5.82	12.8	1.0	1.32	7.14	2.1
LTX24HL-BS	12	21	350	205	87	162	8 1/16	3 7/16	6 6/16	–/+	A	5.82	12.8	1.0	1.32	7.14	2.1

EB SERIES DRY CHARGED VRLA(AGM) MAINTENANCE FREE BATTERY(PP)

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	CCA 0℉ (-18℃) A	Battery Size: Dimensions-Millimeters (±2mm) L	W	H	Dimensions-Inches (±1/16in) L	W	H	Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid Kg	Lbs	Electrolyte Volume Liters	Weight Kg	Total Weight for Battery Kg	Regular Charge Current A
EBX4L-BS	12	3	50	113	70	85	4 7/16	2 3/4	3 1/2	- +	A	1.20	2.6	0.2	0.22	1.42	0.3
EBX5L-BS	12	4	70	113	70	105	4 7/16	2 3/4	4	- +	A	1.50	3.3	0.2	0.30	1.80	0.4
EBZ5L-BS	12	3.5	70	113	70	85	4 7/16	2 3/4	3 1/2	- +	A	1.20	2.6	0.2	0.22	1.42	0.4
EBX5.5L-BS	12	5.5	75	135	60	130	5 5/16	2 1/4	5	- +	A	1.60	3.5	0.3	0.45	2.05	0.6
EBZ6L-BS	12	5	90	113	70	105	4 7/16	2 3/4	4	- +	A	1.69	3.7	0.2	0.31	2.00	0.5
EBX7L-BS	12	6	85	113	70	130	4 7/16	2 3/4	5	- +	A	2.02	4.4	0.3	0.41	2.43	0.6
EBX7A-BS	12	6	90	150	87	93	5 14/16	3 2/4	3 1/2	+ -	A	2.07	4.6	0.3	0.45	2.52	0.6
EB7B-BS	12	6.5	85	150	66	93	5 14/16	2 2/4	3 1/2	+ -	A	1.95	4.3	0.3	0.39	2.34	0.7
EBZ7L-BS	12	6	130	113	70	105	4 7/16	2 3/4	4	- +	A	1.82	4.0	0.3	0.36	2.18	0.6
EB7DL-BS	12	7	115	146	60	130	5 6/8	2 3/8	5 1/8	- +	A	1.94	4.3	0.4	0.46	2.40	0.7
EBX8-BS-1	12	7	75	135	75	133	5 5/16	3	5	+ -	B	2.03	4.5	0.4	0.57	2.60	0.7
EBX8-BS	12	8	105	135	75	133	5 5/16	3	5	+ -	A	2.23	4.9	0.4	0.56	2.79	0.8
EBX9-BS	12	8	120	150	87	105	5 14/16	3 2/4	4	+ -	A	2.53	5.6	0.4	0.56	3.09	0.8
EB9A-BS	12	9	120	135	75	139	5 5/16	3	5 1/2	+ -	A	2.50	5.5	0.5	0.61	3.11	0.9
EB9B-BS	12	8	115	150	70	105	5 14/16	2 3/4	4	+ -	A	2.32	5.1	0.4	0.48	2.80	0.8
EBX10L-BS	12	10	160	133	90	145	5 4/16	3 2/4	5 1/2	- +	A	2.89	6.4	0.7	0.88	3.77	1.0
EBZ10-BS	12	8.6	190	150	88	93	5 14/16	3 2/4	3 1/2	+ -	A	2.68	5.9	0.4	0.52	3.20	0.9
EBZ12L-BS	12	11	210	150	88	110	5 14/16	3 2/4	4 1/2	- +	A	3.33	7.3	0.5	0.64	3.97	1.1
EBZ12-BS	12	11	210	150	88	110	5 14/16	3 2/4	4 1/2	+ -	A	3.33	7.3	0.5	0.64	3.97	1.1
EBZ14-BS	12	11.2	230	150	88	110	5 14/16	3 2/4	4 1/2	+ -	A	3.33	7.3	0.5	0.64	3.97	1.1
EBX12L-BS	12	10	180	150	87	130	5 14/16	3 2/4	5	- +	A	3.22	7.1	0.6	0.75	3.97	1.0
EBX12-BS	12	10	180	150	87	130	5 14/16	3 2/4	5	+ -	A	3.22	7.1	0.6	0.75	3.97	1.0
EB12A-BS	12	10	175	150	88	105	5 14/16	3 2/4	4	+ -	A	2.67	5.9	0.5	0.65	3.32	1.0
EB12B-BS	12	10	175	150	70	130	5 14/16	2 3/4	5	+ -	A	2.99	6.6	0.5	0.64	3.63	1.0
EBX14L-BS	12	12	200	150	87	145	5 14/16	3 2/4	5 1/2	- +	A	3.54	7.8	0.6	0.86	4.40	1.2
EBX14-BS	12	12	200	150	87	145	5 7/8	3 7/16	5 11/16	+ -	A	3.54	7.8	0.6	0.86	4.40	1.2
EB14B-BS	12	12	210	150	70	145	5 14/16	2 3/4	5 1/2	+ -	A	3.36	7.4	0.6	0.76	4.12	1.2
EBX14AHL-BS	12	12	210	133	90	164	5 2/8	3 9/16	6 7/16	- +	A	3.94	8.7	0.6	0.77	4.71	1.2
EBX14AH-BS	12	12	210	133	90	164	5 4/16	3 2/4	6 1/2	+ -	A	3.94	8.7	0.6	0.77	4.71	1.2
EBX14AH-BS-PW	12	12	240	133	90	174	5 2/8	3 9/16	6 14/16	+ -	A	3.99	8.8	0.6	0.77	4.76	1.2
EBX15L-BS	12	13	230	175	87	130	6 14/16	3 2/4	5	- +	A	3.81	8.4	0.7	0.90	4.71	1.3
EBX15-BS	12	13	230	175	87	130	6 7/8	3 7/16	5 2/16	+ -	A	3.81	8.4	0.7	0.90	4.71	1.3
EBX16L-BS	12	14	230	150	87	161	5 14/16	3 2/4	6 1/2	- +	A	4.13	9.1	0.8	0.99	5.12	1.4
EBX16-BS	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16	+ -	A	4.13	9.1	0.8	0.99	5.12	1.4
EBX16-BS-1	12	14	250	150	87	161	5 14/16	3 2/4	6 1/2	+ -	E	4.10	9.0	0.8	0.99	5.09	1.4
EBX16-BS-2	12	14	250	150	87	161	5 14/16	3 2/4	6 1/2	+ -	E	4.45	9.8	0.8	0.99	5.44	1.4
EB16BL-BS	12	19	260	175	100	155	6 7/8	3 15/16	6 2/16	- +	A	5.10	11.5	1.0	1.27	6.37	1.9
EB16BL-BS-PW	12	19	260	175	100	175	6 14/16	4	7	- +	A	5.18	11.5	1.0	1.27	6.45	1.9
EB16B-BS	12	19	260	175	100	155	6 7/8	3 15/16	6 2/16	+ -	A	5.10	11.5	1.0	1.27	6.37	1.9
EBX18L-BS	12	18	300	205	87	162	8 1/16	3 2/4	6 1/2	- +	A	5.17	11.4	1.1	1.45	6.62	1.8
EBX18-BS	12	18	300	205	87	162	8 1/8	3 7/16	6 6/16	+ -	A	5.17	11.4	1.1	1.45	6.62	1.8
EBX20L-BS	12	18	270	175	87	155	6 14/16	3 2/4	6	- +	A	4.90	10.8	0.9	1.17	6.07	1.8
EBX20-BS	12	18	270	175	87	155	6 7/8	3 7/16	6 2/16	+ -	A	4.90	10.8	0.9	1.17	6.07	1.8
EBX20HL-BS	12	18	310	175	87	155	6 14/16	3 2/4	6	- +	A	4.90	10.8	0.9	1.17	6.07	1.8
EBX20HL-BS-PW	12	18	310	175	87	175	6 7/8	3 7/16	6 14/16	- +	A	5.00	11.0	0.9	1.17	6.17	1.8
EBX20H-BS	12	18	310	175	87	155	6 14/16	3 2/4	6	+ -	A	4.90	10.8	0.9	1.17	6.07	1.8
EBX20CH-BS	12	18	270	150	87	161	5 7/8	3 7/16	6 5/16	+ -	A	4.55	10.0	0.8	1.08	5.63	1.8
EBX20PL-BS	12	18	275	182	77	168	7 3/16	3	6 1/2	- +	G	4.60	10.1	0.8	1.07	5.67	1.8
EBX24HL-BS	12	21	350	205	87	162	8 1/8	3 7/16	6 6/16	- +	A	5.84	12.9	1.0	1.32	7.16	2.1
EBX24H-BS	12	21	350	205	87	162	8 1/16	3 2/4	6 1/2	+ -	A	5.84	12.9	1.0	1.32	7.16	2.1
EBX30L-BS	12	30	385	166	126	173	6 4/8	4 15/16	6 13/16	- +	A	8.13	17.9	1.4	1.80	9.93	3.0
EBX30-BS	12	30	385	166	126	173	6 9/16	5	7	+ -	A	8.13	17.9	1.4	1.80	9.93	3.0

LT SERIES FACTORY ACTIVATED VRLA(AGM) MAINTENANCE FREE BATTERY(ABS)

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	CCA 0℉ (-18℃) A	Battery Size: Dimensions-Millimeters (±2mm) L	W	H	Dimensions-Inches (±1/16in) L	W	H	Assembly Figure (As Per Cover Polarity)	Terminal Type	Total Weight for Battery Kg	Lbs	Regular Charge Current A
6LT4-2	6	4	N/A	70	70	95	2 3/4	2 3/4	3 3/4	- +	/	0.86	1.9	0.4
LT2.5-3	12	2.5	25	80	70	105	3 1/8	2 3/4	4 1/8	- +	/	1.17	2.6	0.3
LT2.5-3-1	12	2.5	20	80	70	105	3 1/8	2 3/4	4 1/8	- +	/	1.06	2.3	0.3
LT2.5-3-2	12	2.5	20	80	70	105	3 1/4	2 3/4	4 1/4	- +	/	1.01	2.2	0.3
LT3-3	12	3	35	98	56	110	3 3/4	2 1/4	4 1/4	- +	B	1.20	2.6	0.3
LTR4A-5	12	2.3	45	113	48	85	4 4/8	2	3 3/8	- +	I	0.96	2.1	0.2
LTR4B-5	12	2.3	30	113	48	85	4 2/4	2	3 1/4	- +	I	0.96	2.1	0.2
LT4B-5	12	2.3	40	113	38	85	4 4/8	1 2/4	3 3/8	- +	J	0.91	2.0	0.2
LT4-3	12	3	50	113	70	85	4 2/4	2 3/4	3 1/4	- +	A	1.44	3.2	0.3
LT4A-3	12	4	60	120	70	92	4 6/8	2 3/4	3 5/8	- +	A	1.58	3.5	0.4
LT5-3	12	4	70	113	70	105	4 4/8	2 3/4	4 1/8	- +	A	1.80	4.0	0.4
LT5A-3-1	12	5	85	119	59	130	4 3/4	2 1/4	5	- +	B	1.91	4.2	0.5
LT6.5-3	12	6.5	85	139	66	102	5 2/4	2 2/4	4	- +	B	2.33	5.1	0.7
LT7-3	12	6	85	113	70	130	4 4/8	2 3/4	5 1/8	- +	A	2.42	5.3	0.6
LT7A-4	12	6	90	150	87	93	6	3 2/4	3 3/4	+ -	A	2.55	5.6	0.6
LT7B-4	12	6.5	85	150	65	93	5 7/8	2 2/4	3 5/8	+ -	A	2.30	5.1	0.7
LT7D-3	12	7	90	146	60	130	5 3/4	2 1/4	5	- +	B	2.41	5.3	0.7
LT7D-4	12	7	115	146	60	130	5 6/8	2 1/4	5 1/8	+ -	B	2.41	5.3	0.7
LT7E-4	12	7	90	136	75	122	5 1/4	3	4 3/4	+ -	B	2.55	5.6	0.7
LT7E-3	12	7	100	136	75	122	5 3/8	3	4 6/8	- +	B	2.55	5.6	0.7
LTZ7-3	12	6	130	113	70	105	4 2/4	2 3/4	4 1/4	- +	A	2.08	4.6	0.6
LT9-4	12	8	120	150	87	105	5 7/8	3 2/4	4 1/8	+ -	A	3.05	6.7	0.8
LT9A-3	12	9	120	135	75	139	5 1/4	3	5 2/4	- +	B	3.07	6.8	0.9
LT9A-4	12	9	120	135	75	139	5 1/4	3	5 2/4	+ -	B	3.07	6.8	0.9
LT9A-4-PW	12	9	120	135	75	154	5 1/4	3	6 1/8	+ -	B	3.12	6.9	0.9
LT9B-4	12	8	115	150	68	105	6	2 3/4	4 1/4	+ -	A	2.71	6.0	0.8
LT10-3	12	10	160	135	90	145	5 3/8	3 4/8	5 6/8	- +	A	3.73	8.2	1.0
LT10-3-PW	12	10	160	135	90	155	5 3/8	3 4/8	6 1/8	- +	A	3.77	8.3	1.0
LTZ10-4	12	8.6	190	150	87	93	5 7/8	3 7/16	3 11/16	+ -	A	2.91	6.4	0.9
LT12A-4	12	10	175	150	87	105	5 7/8	3 7/16	4 1/8	+ -	A	3.40	7.5	1.0
LT12B-4	12	10	175	150	69	130	5 7/8	2 11/16	5 1/8	+ -	A	3.56	7.8	1.0
LT12-3	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8	- +	A	3.99	8.8	1.0
LT12-4	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8	+ -	A	3.99	8.8	1.0
LTZ12-4	12	11	210	150	87	110	5 7/8	3 7/16	4 5/16	+ -	A	3.40	7.5	1.1
LT14-3	12	12	200	150	87	145	5 7/8	3 7/16	5 6/8	- +	A	4.46	9.8	1.2
LT14-4	12	12	200	150	87	145	5 7/8	3 7/16	5 11/16	+ -	A	4.46	9.8	1.2
LT14A-4	12	12	210	135	90	167	5 3/8	3 9/16	6 4/8	+ -	A	4.72	10.4	1.2
LT14A-4-PW	12	12	210	135	90	176	5 3/8	3 9/16	6 7/8	+ -	A	4.76	10.5	1.2
LT14A-3	12	12	210	135	90	167	5 5/16	3 9/16	6 4/8	- +	A	4.72	10.4	1.2
LT14B-4	12	12	210	150	69	145	5 7/8	2 11/16	5 6/8	+ -	A	4.16	9.2	1.2
LTZ14-4	12	11.2	230	150	87	110	5 7/8	3 7/16	4 5/16	+ -	A	3.57	7.9	1.1
LT15-3	12	13	230	175	87	130	6 7/8	3 7/16	5 1/8	- +	A	4.73	10.4	1.3
LT15-4	12	13	230	175	87	130	6 7/8	3 7/16	5 1/8	+ -	A	4.73	10.4	1.3
LT16-3	12	14	230	150	87	161	5 7/8	3 7/16	6 3/8	- +	A	5.16	11.4	1.4
LT16-4	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16	+ -	A	5.16	11.4	1.4
LT16A-4	12	14	230	150	87	161	5 7/8	3 7/16	6 3/8	+ -	E	5.12	11.3	1.4
LT16C-3	12	19	260	175	100	175	6 7/8	3 15/16	6 7/8	- +	A	6.53	14.4	1.9
LT18-3	12	18	250	205	87	162	8 1/8	3 7/16	6 3/8	- +	A	6.64	14.6	1.8
LT18-4	12	18	250	205	87	162	8 1/16	3 7/16	6 3/8	+ -	A	6.64	14.6	1.8
LT20-3	12	18	270	175	87	155	6 7/8	3 7/16	6 1/8	- +	A	5.93	13.1	1.8
LT20-4	12	18	270	175	87	155	6 7/8	3 7/16	6 1/8	+ -	A	5.93	13.1	1.8
LT20H-3	12	18	310	175	87	155	6 7/8	3 7/16	6 1/8	- +	A	6.12	13.5	1.8
LT20H-4	12	18	310	175	87	155	6 7/8	3 7/16	6 1/8	+ -	A	6.12	13.5	1.8
LT20CH-4	12	18	270	150	87	161	5 7/8	3 7/16	6 3/8	+ -	A	5.66	12.5	1.8
LT24-3	12	21	350	205	87	162	8 1/8	3 7/16	6 3/8	- +	A	7.27	16.0	2.1
LT24-4	12	21	350	205	87	162	8 1/16	3 7/16	6 3/8	+ -	A	7.27	16.0	2.1
LT24-3-1	12	21	350	205	87	162	8 1/8	3 7/16	6 3/8	- +	C	7.27	16.0	2.1
LT30-3	12	30	385	165	125	175	6 1/2	4 15/16	7 4/8	- +	A	10.00	22.0	3.0
LT30-3-PW	12	30	440	165	125	192	6 1/2	4 15/16	6 7/8	- +	A	9.95	21.9	3.0
LT30-4	12	30	385	165	125	175	6 4/8	4 15/16	6 7/8	+ -	A	9.95	21.9	3.0

EB SERIES FACTORY ACTIVATED VRLA(AGM) MAINTENANCE FREE BATTERY(PP)

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	CCA 0℉ (-18℃) A	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Total Weight for Battery		Regular Charge Current
				Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)							
				L	W	H	L	W	H			Kg	Lbs	A
EB4-3	12	3	50	113	70	85	4 7/16	2 3/4	3 1/2		A	1.45	3.2	0.3
EB5-3	12	4	70	113	70	105	4 7/16	2 3/4	4		A	1.78	3.9	0.4
EBZ5-3	12	3.5	70	113	70	85	4 7/16	2 3/4	3 1/2		A	1.45	3.2	0.4
EB5.5-3	12	5.5	75	135	60	130	5 5/16	2 1/4	5		A	2.05	4.5	0.6
EBZ6-3	12	5	90	113	70	105	4 7/16	2 3/4	4 1/8		A	2.00	4.4	0.5
EB7-3	12	6	85	113	70	130	4 7/16	2 3/4	5		A	2.43	5.4	0.6
EB7A-4	12	6	90	150	87	93	5 7/8	3 7/16	3 11/16		A	2.52	5.6	0.6
EB7B-4	12	6.5	85	150	66	93	5 7/8	2 10/16	3 11/16		A	2.37	5.2	0.7
EB7D-4	12	7	115	146	60	130	5 6/8	2 3/8	5 1/8		A	2.41	5.3	0.7
EBZ7-3	12	6	130	113	70	105	4 7/16	2 3/4	4 1/8		A	2.15	4.7	0.6
EB8-4	12	8	120	135	75	133	5 5/16	2 15/16	5		A	2.81	6.2	0.8
EB9-4	12	8	120	150	87	105	5 14/16	3 2/4	4 1/8		A	3.06	6.7	0.8
EB9A-4	12	9	120	135	75	139	5 5/16	2 15/16	5 1/2		A	3.12	6.9	0.9
EB9B-4	12	8	115	150	70	105	5 7/8	2 12/16	4 1/8		A	2.83	6.2	0.8
EB10-3	12	10	160	133	90	145	5 4/16	3 9/16	5 11/16		A	3.78	8.3	1.0
EBZ10-4	12	8.6	190	150	88	93	5 7/8	3 7/16	3 5/8		A	3.20	7.0	0.9
EBZ10A-4	12	8.6	190	150	88	93	5 7/8	3 7/16	3 11/16		A	3.20	7.0	0.9
EB12-3	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8		A	3.95	8.7	1.0
EB12-4	12	10	180	150	87	130	5 7/8	3 7/16	5 1/8		A	3.95	8.7	1.0
EB12A-4	12	10	175	150	88	105	5 7/8	3 7/16	4 1/8		A	3.34	7.4	1.0
EB12B-4	12	10	175	150	70	130	5 7/8	2 12/16	5 1/8		A	3.67	8.1	1.0
EBZ12-4	12	11	210	150	88	110	5 7/8	3 7/16	4 5/16		A	4.02	8.9	1.1
EBZ12A-4	12	11	210	150	88	110	5 7/8	3 7/16	4 5/16		A	4.03	8.9	1.1
EB14-4	12	14	200	150	87	145	5 7/8	3 7/16	5 1/1/16		A	4.81	10.6	1.4
JB14-4	12	14	210	150	87	145	5 7/8	3 7/16	5 11/16		K	4.75	10.5	1.4
EB14A-3	12	12	210	133	90	164	5 2/8	3 9/16	6 7/16		A	4.75	10.5	1.2
EB14A-4	12	12	210	133	90	164	5 4/16	3 9/16	6 7/16		A	4.75	10.5	1.2
MB14-4	12	12	210	150	87	145	5 7/8	3 7/16	5 11/16		M	4.80	10.6	1.2
EB14B-4	12	12	210	150	70	145	5 7/8	2 12/16	5 11/16		A	4.15	9.1	1.2
EB14C-3	12	12	200	150	87	145	5 7/8	3 7/16	5 11/16		A	4.40	9.7	1.2
EB14C-4	12	12	200	150	87	145	5 7/8	3 7/16	5 11/16		A	4.40	9.7	1.2
EBZ14-4	12	11.2	230	150	88	110	5 7/8	3 7/16	4 5/16		A	4.02	8.9	1.1
EBZ14A-4	12	11.2	230	150	88	110	5 7/8	3 7/16	4 5/16		A	4.03	8.9	1.1
EB15-3	12	13	230	175	87	130	6 7/8	3 7/16	5 2/16		A	4.74	10.4	1.3
EB15-4	12	13	230	175	87	130	6 7/8	3 7/16	5 2/16		A	4.74	10.4	1.3
EB16-3	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16		A	5.16	11.4	1.4
EB16-4	12	14	230	150	87	161	5 7/8	3 7/16	6 5/16		A	5.16	11.4	1.4
EB16A-4	12	14	250	150	87	161	5 7/8	3 7/16	6 5/16		E	5.13	11.3	1.4
EB16B-3	12	19	260	175	100	155	6 7/8	3 15/16	6 2/16		A	6.40	14.1	1.9
EB16B-4	12	19	260	175	100	155	6 7/8	3 15/16	6 2/16		A	6.40	14.1	1.9
EB18-3	12	18	250	205	87	162	8 1/16	3 7/16	6 3/8		A	6.63	14.6	1.8
EB18-4	12	18	250	205	87	162	8 1/8	3 7/16	6 6/16		A	6.63	14.6	1.8
EB20-3	12	18	270	175	87	155	6 7/8	3 7/16	6 2/16		A	6.04	13.3	1.8
EB20-4	12	18	270	175	87	155	6 7/8	3 7/16	6 2/16		A	6.04	13.3	1.8
EB20H-3	12	18	310	175	87	155	6 7/8	3 7/16	6 2/16		A	6.04	13.3	1.8
EB20H-4	12	18	310	175	87	155	6 7/8	3 7/16	6 2/16		A	6.04	13.3	1.8
EB20CH-4	12	18	270	150	87	161	5 7/8	3 7/16	6 5/16		A	5.64	12.4	1.8
EB20P-3	12	18	275	182	77	168	7 1/8	3 1/16	6 10/16		G	5.66	12.5	1.8
EB20P-3-1	12	18	275	182	77	168	7 1/8	3 1/16	6 1/2		G	5.67	12.5	1.8
EB24-3	12	21	350	205	87	162	8 1/8	3 7/16	6 6/16		A	7.18	15.8	2.1
EB24-4	12	21	350	205	87	162	8 1/16	3 7/16	6 3/8		A	7.18	15.8	2.1
EB30-3	12	30	385	166	126	173	6 4/8	4 15/16	6 13/16		A	9.81	21.6	3.0
EB30-4	12	30	385	166	126	173	6 1/ 2	4 15/16	6 6/8		A	9.81	21.6	3.0

HIGH PERFORMANCE FLOODED BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Electrolyte		Total Weight for Battery	Regular Charge Current
			Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)							Volume	Weight		
			L	W	H	L	W	H			Kg	Lbs	Liters	Kg	Kg	A
LB2.5L-C	12	2.5	80	70	105	3 1/8	2 3/4	4 1/8		/	0.77	1.70	0.24	0.31	1.08	0.3
LB2.5L-C-2	12	2.5	80	70	105	3 1/8	2 3/4	4 1/8		/	0.77	1.70	0.24	0.31	1.08	0.3
LB3L-A	12	3	98	56	110	3 7/8	2 1/4	4 3/8		B	0.95	2.09	0.23	0.29	1.24	0.3
LB3L-B	12	3	98	56	110	3 7/8	2 1/4	4 3/8		B	0.95	2.09	0.23	0.29	1.24	0.3
LB4L-B	12	4	120	70	92	4 6/8	2 3/4	3 5/8		A	1.23	2.71	0.27	0.35	1.58	0.4
LB4L-A	12	4	120	70	92	4 6/8	2 3/4	3 5/8		A	1.23	2.71	0.27	0.35	1.58	0.4
LB5L-B	12	5	120	61	130	4 6/8	2 1/4	5 1/8		B	1.59	3.51	0.37	0.47	2.06	0.5
LB5L-B2	12	5	120	61	130	4 6/8	2 1/4	5 1/8		A	1.60	3.53	0.38	0.48	2.08	0.5
LB6.5L-B	12	6.5	138	73	107	5 3/8	2 3/4	4 2/8		B	1.80	3.97	0.40	0.51	2.31	0.7
LB7-A	12	8	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.8
LB7L-A	12	8	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.8
LB7L-B	12	8	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.8
LB7L-A2	12	8	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.8
LB7L-B2	12	8	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.8
LB7-A2	12	8	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.8
LB7B-B	12	7	150	60	130	5 7/8	2 1/4	5 1/8		B	2.00	4.41	0.49	0.63	2.63	0.7
LB7C-A	12	8	130	90	114	5 1/8	3 2/4	4 4/8		E	2.10	4.63	0.58	0.74	2.84	0.8
LB9-B	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9
LB9L-B	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9
LB9L-A1	12	9	135	75	139	5 3/8	3	5 4/8		F	2.27	5.00	0.56	0.72	2.99	0.9
LB9L-A2	12	9	135	75	139	5 3/8	3	5 4/8		A	2.27	5.00	0.56	0.72	2.99	0.9
LB9L-B2	12	9	135	75	139	5 3/8	3	5 4/8		A	2.27	5.00	0.56	0.72	2.99	0.9
LB9A-A	12	9	135	75	155	5 3/8	3	6 1/8		B	2.27	5.00	0.56	0.72	2.99	0.9
LB10L-A2	12	11	134	89	145	5 3/8	3 2/4	5 6/8		D	2.85	6.28	0.69	0.88	3.73	1.1
LB10L-B	12	11	134	89	145	5 3/8	3 2/4	5 6/8		B	2.85	6.28	0.69	0.88	3.73	1.1
LB10L-B2	12	11	134	89	145	5 3/8	3 2/4	5 6/8		D	2.85	6.28	0.69	0.88	3.73	1.1
LB10A-A2	12	11	134	89	155	5 3/8	3 2/4	6 1/8		D	2.88	6.35	0.69	0.88	3.76	1.1
LB12A-A	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	3.16	6.97	0.70	0.90	4.06	1.2
LB12A-B	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	3.16	6.97	0.70	0.90	4.06	1.2
LB12AL-A	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	3.16	6.97	0.70	0.90	4.06	1.2
LB12AL-A1	12	12	134	81	160	5 2/8	3 1/4	6 2/8		A	3.16	6.97	0.70	0.90	4.06	1.2
LB12AL-A2	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	3.16	6.97	0.70	0.90	4.06	1.2
LB12B-B2	12	12	160	90	130	6 2/8	3 2/4	5 1/8		D	2.95	6.50	0.77	0.99	3.94	1.2
LB12C-A	12	12	134	81	175	5 2/8	3 1/4	6 7/8		A	3.18	7.01	0.70	0.90	4.08	1.2
LB14-A2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4
LB14-B2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4
LB14L-A	12	14	134	89	166	5 2/8	3 2/4	6 4/8		B	3.53	7.78	0.84	1.08	4.61	1.4
LB14L-A1	12	14	134	89	166	5 2/8	3 2/4	6 4/8		E	3.53	7.78	0.84	1.08	4.61	1.4
LB14L-A2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4
EB14L-A2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.88	8.55	0.78	1.00	4.88	1.4
LB14L-B2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4

HIGH PERFORMANCE FLOODED BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Electrolyte		Total Weight for Battery	Regular Charge Current
			Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)							Volume	Weight		
			L	W	H	L	W	H			Kg	Lbs	Liters	Kg	Kg	A
SLB14L-A2 (with sensor)	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4
SLB14L-B2 (with sensor)	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.53	7.78	0.84	1.08	4.61	1.4
LB14A-A1	12	14	134	89	176	5 2/8	3 2/4	6 7/8		B	3.56	7.85	0.84	1.08	4.64	1.4
LB14A-A2	12	14	134	89	176	5 2/8	3 2/4	6 7/8		D	3.58	7.89	0.84	1.08	4.66	1.4
LB16-B	12	19	175	100	155	6 7/8	4	6 1/8		B	4.50	9.92	1.20	1.54	6.04	1.9
LB16L-B	12	19	175	100	155	6 7/8	4	6 1/8		B	4.50	9.92	1.20	1.54	6.04	1.9
LB16L-A2	12	19	175	100	155	6 7/8	4	6 1/8		B	4.50	9.92	1.20	1.54	6.04	1.9
LB16B-A	12	16	160	90	161	6 2/8	3 2/4	6 3/8		A	3.93	8.66	0.98	1.25	5.18	1.6
LB16B-A1	12	16	160	90	161	6 2/8	3 2/4	6 3/8		C	3.93	8.66	0.98	1.25	5.18	1.6
LB16B-A2	12	16	160	90	161	6 2/8	3 2/4	6 3/8		E	3.93	8.66	0.98	1.25	5.18	1.6
LB16AL-A2	12	16	207	71.5	164	8 1/8	2 3/4	6 4/8		F	4.05	8.93	1.13	1.45	5.50	1.6
HLB16A-A /HLB16A-AB	12	16	151	91	180	6	3 2/4	7 1/8		C	4.05	8.93	0.91	1.16	5.21	1.6
LB16C-B	12	19	175	100	175	6 7/8	4	6 7/8		A	4.57	10.07	1.20	1.54	6.11	1.9
LB16CL-B	12	19	175	100	175	6 7/8	4	6 7/8		A	4.57	10.07	1.20	1.54	6.11	1.9
L50-N18L-A	12	20	205	90	162	8 1/8	3 2/4	6 3/8		C	5.00	11.02	1.25	1.60	6.60	2.0
L50-N18L-A2	12	20	205	90	162	8 1/8	3 2/4	6 3/8		C	5.00	11.02	1.25	1.60	6.60	2.0
L50-N18L-A3	12	20	205	90	162	8 1/8	3 2/4	6 3/8		A	5.00	11.02	1.25	1.60	6.60	2.0
SL50-N18L-A (with sensor)	12	20	205	90	162	8 1/8	3 2/4	6 3/8		C	5.00	11.02	1.25	1.60	6.60	2.0
SL50-N18L-A2 (with sensor)	12	20	205	90	162	8 1/8	3 2/4	6 3/8		C	5.00	11.02	1.25	1.60	6.60	2.0
SL50-N18L-AT (with sensor)	12	20	205	90	162	8 1/8	3 2/4	6 3/8		C	5.00	11.02	1.25	1.60	6.60	2.0
L50-N18A-A	12	20	205	90	176	8 1/8	3 2/4	6 7/8		C	5.00	11.02	1.25	1.60	6.60	2.0
LB18-A	12	18	180	90	162	7 1/8	3 2/4	6 3/8		C	4.32	9.52	1.23	1.57	5.89	1.8
LB18L-A	12	18	180	90	162	7 1/8	3 2/4	6 3/8		C	4.32	9.52	1.23	1.57	5.89	1.8
LB18L-A2	12	18	180	90	162	7 1/8	3 2/4	6 3/8		C	4.32	9.52	1.23	1.57	5.89	1.8
L60-N24-A	12	28	184	124	170	7 2/8	4 7/8	6 6/8		G	5.83	12.85	1.81	2.32	8.15	2.8
L60-N24L-A	12	28	184	124	170	7 2/8	4 7/8	6 6/8		G	5.83	12.85	1.81	2.32	8.15	2.8
L60-N24AL-B	12	28	184	124	170	7 2/8	4 7/8	6 6/8		G	5.83	12.85	1.81	2.32	8.15	2.8
L60-N28L-A	12	28	184	130	170	7 2/8	5 1/8	6 6/8		G	5.90	13.01	1.84	2.36	8.26	2.8
L60-N30L-A	12	30	184	130	170	7 2/8	5 1/8	6 6/8		G	6.35	14.00	1.84	2.36	8.71	3.0
L60-N30L-A/HD	12	30	184	130	170	7 2/8	5 1/8	6 6/8		G	6.35	14.00	1.84	2.36	8.71	3.0
L60-N30-A	12	30	184	130	170	7 2/8	5 1/8	6 6/8		G	6.35	14.00	1.84	2.36	8.71	3.0
L60-N30L-B	12	30	184	130	170	7 2/8	5 1/8	6 6/8		G	6.35	14.00	1.84	2.36	8.71	3.0
L60-N30L-A-1	12	24	184	130	165	7 2/8	5 1/8	6 4/8		G	5.25	11.57	1.81	2.32	7.57	2.4
LB30L-B	12	30	165	130	176	6 4/8	5 1/8	6 7/8		A	6.30	13.89	1.62	2.08	8.38	3.0
LB30CL-B	12	30	165	130	192	6 4/8	5 1/8	7 4/8		A	6.35	14.00	1.62	2.08	8.43	3.0
U1-5	12	12	195	130	180	7 5/8	5 1/8	7 1/8		G	3.65	8.05	2.10	2.69	6.34	1.2
U1R-5	12	12	195	130	180	7 5/8	5 1/8	7 1/8		G	3.65	8.05	2.10	2.69	6.34	1.2
U1-6	12	16	195	130	180	7 5/8	5 1/8	7 1/8		G	4.10	9.04	1.99	2.55	6.65	1.6
U1R-6	12	16	195	130	180	7 5/8	5 1/8	7 1/8		G	4.10	9.04	1.99	2.55	6.65	1.6
U1-7	12	18	195	130	180	7 5/8	5 1/8	7 1/8		G	4.52	9.96	1.95	2.50	7.02	1.8
U1R-7	12	18	195	130	180	7 5/8	5 1/8	7 1/8		G	4.52	9.96	1.95	2.50	7.02	1.8
U1-9	12	24	195	130	180	7 5/8	5 1/8	7 1/8		G	5.43	11.97	1.95	2.50	7.93	2.4
U1R-9	12	24	195	130	180	7 5/8	5 1/8	7 1/8		G	5.43	11.97	1.95	2.50	7.93	2.4
U1-11	12	30	195	130	180	7 5/8	5 1/8	7 1/8		G	6.37	14.04	1.85	2.37	8.74	3.0
U1R-11	12	30	195	130	180	7 5/8	5 1/8	7 1/8		G	6.37	14.04	1.85	2.37	8.74	3.0

CONVENTIONAL FLOODED BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Electrolyte		Total Weight for Battery	Regular Charge Current
			Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)							Volume	Weight		
			L	W	H	L	W	H			Kg	Lbs	Liters	Kg	Kg	A
6N2-2A	6	2	70	47	96	2 6/8	1 3/4	3 6/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-1	6	2	70	47	96	2 6/8	1 3/4	3 6/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-2	6	2	70	47	96	2 6/8	1 3/4	3 6/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-3	6	2	70	47	96	2 6/8	1 3/4	3 6/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-4	6	2	70	47	96	2 6/8	1 3/4	3 6/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-5	6	2	70	47	96	2 6/8	1 3/4	3 6/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-6	6	2	70	47	96	2 6/8	1 3/4	3 6/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-7	6	2	70	47	96	2 6/8	1 3/4	3 6/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2A-8	6	2	70	47	96	2 6/8	1 3/4	3 6/8		/	0.42	0.93	0.12	0.15	0.57	0.2
6N2-2D	6	2	70	47	104	2 6/8	1 3/4	4 1/8		/	0.43	0.95	0.12	0.15	0.58	0.2
6N2A-2C	6	2	70	47	104	2 6/8	1 3/4	4 1/8		/	0.43	0.95	0.12	0.15	0.58	0.2
6N2A-2C-3	6	2	70	47	104	2 6/8	1 3/4	4 1/8		/	0.43	0.95	0.12	0.15	0.58	0.2
6N4-2A	6	4	71	71	96	2 6/8	2 3/4	3 6/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-C1	6	4	71	71	96	2 6/8	2 3/4	3 6/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-2	6	4	71	71	96	2 6/8	2 3/4	3 6/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-3	6	4	71	71	96	2 6/8	2 3/4	3 6/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-4	6	4	71	71	96	2 6/8	2 3/4	3 6/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-5	6	4	71	71	96	2 6/8	2 3/4	3 6/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-6	6	4	71	71	96	2 6/8	2 3/4	3 6/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-7	6	4	71	71	96	2 6/8	2 3/4	3 6/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-8	6	4	71	71	96	2 6/8	2 3/4	3 6/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4-2A-UNV	6	4	71	71	96	2 6/8	2 3/4	3 6/8		/	0.63	1.39	0.18	0.23	0.86	0.4
6N4C-1B	6	4	71	71	105	2 6/8	2 3/4	4 1/8		/	0.65	1.43	0.18	0.23	0.88	0.4
6N4A-4D	6	4	61	57	130	2 3/8	2 1/4	5 1/8		/	0.70	1.54	0.17	0.22	0.92	0.4
6N4A-4D-1	6	4	61	57	130	2 3/8	2 1/4	5 1/8		/	0.70	1.54	0.17	0.22	0.92	0.4
6N4B-2A	6	4	102	48	96	4	2	3 6/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N4B-2A-1	6	4	102	48	96	4	2	3 6/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N4B-2A-2	6	4	102	48	96	4	2	3 6/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N4B-2A-3	6	4	102	48	96	4	2	3 6/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N4B-2A-4	6	4	102	48	96	4	2	3 6/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N4B-2A-5	6	4	102	48	96	4	2	3 6/8		/	0.62	1.37	0.19	0.25	0.87	0.4
6N5.5-3D	6	5.5	90	70	100	3 4/8	2 3/4	3 7/8		/	0.80	1.76	0.27	0.35	1.15	0.6
6N5.5-1D	6	5.5	90	70	100	3 4/8	2 3/4	3 7/8		/	0.80	1.76	0.27	0.35	1.15	0.6
6N5.5-1D-1	6	5.5	90	70	100	3 4/8	2 3/4	3 7/8		/	0.80	1.76	0.27	0.35	1.15	0.6
6N6-3B	6	6	99	57	111	3 7/8	2 1/4	4 3/8		B	0.84	1.85	0.26	0.33	1.17	0.6
6N6-3B-1	6	6	99	57	111	3 7/8	2 1/4	4 3/8		B	0.84	1.85	0.26	0.33	1.17	0.6
6N6-1D	6	6	99	57	111	3 7/8	2 1/4	4 3/8		/	0.83	1.83	0.26	0.33	1.16	0.6
6N6-1D-1	6	6	99	57	111	3 7/8	2 1/4	4 3/8		/	0.83	1.83	0.26	0.33	1.16	0.6
6N6-1D-2	6	6	99	57	111	3 7/8	2 1/4	4 3/8		/	0.83	1.83	0.26	0.33	1.16	0.6
6N6-1C	6	6	99	57	111	3 7/8	2 1/4	4 3/8		/	0.83	1.83	0.26	0.33	1.16	0.6
B39-6	6	7	126	48	126	5	2	5		B	0.97	2.14	0.35	0.45	1.42	0.7
B49-6	6	10	91	83	160	3 5/8	3 1/4	6 2/8		B	1.48	3.26	0.57	0.73	2.21	1.0
B38-6A	6	13	119	83	161	4 5/8	3 1/4	6 3/8		B	1.88	4.14	0.75	0.96	2.84	1.3
6N11-2D	6	11	150	70	100	5 7/8	2 3/ 4	3 7/8		B	1.42	3.13	0.42	0.54	1.96	1.1

CONVENTIONAL FLOODED BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Electrolyte		Total Weight for Battery	Regular Charge Current
			Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)							Volume	Weight		
			L	W	H	L	W	H			Kg	Lbs	Liters	Kg	Kg	A
6LB11-2D	6	11	150	70	100	5 7/8	2 3/4	3 7/8		B	1.42	3.13	0.42	0.54	1.96	1.1
6N11A-1B	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
6N11A-3	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
6N11A-4	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
6N11A-3A	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
6N11A-3B	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
6N11A-4A	6	11	122	62	131	4 6/8	2 2/4	5 1/8		B	1.45	3.20	0.48	0.61	2.06	1.1
B54-6	6	12	156	57	116	6 1/8	2 1/4	4 5/8		B	1.50	3.31	0.43	0.55	2.05	1.2
B54-6A	6	12	156	57	116	6 1/8	2 1/4	4 5/8		B	1.50	3.31	0.43	0.55	2.05	1.2
12N3-3A	12	3	98	56	110	3 7/8	2 1/4	4 3/8		B	0.95	2.09	0.23	0.29	1.24	0.3
12N4-3B	12	4	120	70	92	4 6/8	2 3/4	3 5/8		A	1.23	2.71	0.27	0.35	1.58	0.4
12N5-3B	12	5	120	61	130	4 6/8	2 2/4	5 1/8		B	1.59	3.51	0.37	0.47	2.06	0.5
12N5-3B-2	12	5	120	61	130	4 6/8	2 2/4	5 1/8		A	1.60	3.53	0.37	0.47	2.07	0.5
12N5-4B	12	5	120	61	130	4 6/8	2 2/4	5 1/8		B	1.59	3.51	0.37	0.47	2.06	0.5
12N5.5-3B	12	5.5	135	60	130	5 3/8	2 1/4	5 1/8		B	1.60	3.53	0.43	0.55	2.15	0.6
12N5.5-4A	12	5.5	135	60	130	5 3/8	2 1/4	5 1/8		F	1.60	3.53	0.43	0.55	2.15	0.6
12N5.5-4A-1	12	5.5	135	60	130	5 3/8	2 1/4	5 1/8		B	1.60	3.53	0.43	0.55	2.15	0.6
12N5.5-4B	12	5.5	135	60	130	5 3/8	2 1/4	5 1/8		B	1.60	3.53	0.43	0.55	2.15	0.6
12N5.5A-3B	12	5.5	103	90	114	4	3 2/4	4 4/8		B	1.60	3.53	0.48	0.61	2.21	0.6
12N6-3B	12	6	137	72	95	5 3/8	2 3/4	3 6/8		B	1.59	3.51	0.34	0.44	2.03	0.6
12N6-4B	12	6	137	72	95	5 3/8	2 3/4	3 6/8		B	1.59	3.51	0.34	0.44	2.03	0.6
12N6.5-3B	12	6.5	138	73	107	5 3/8	2 3/4	4 2/8		B	1.80	3.97	0.40	0.51	2.31	0.7
12N6.5B-4B	12	7	150	87	95	5 7/8	3 2/4	3 6/8		D	1.93	4.25	0.48	0.61	2.54	0.7
12N7E-B	12	7	150	87	95	5 7/8	3 2/4	3 6/8		A	1.93	4.25	0.48	0.61	2.54	0.7
12N7-3A	12	7	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.7
12N7-3A2	12	7	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.7
12N7-3B	12	7	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.7
12N7-3B2	12	7	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.7
12N7-4A	12	7	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.7
12N7-4A2	12	7	135	75	133	5 3/8	3	5 2/8		A	2.12	4.67	0.56	0.72	2.84	0.7
12N7-4B	12	7	135	75	133	5 3/8	3	5 2/8		B	2.10	4.63	0.56	0.72	2.82	0.7
12N7D-3B	12	7	135	75	150	5 3/8	3	5 7/8		B	2.12	4.67	0.56	0.72	2.84	0.7
12N7A-3A 12N7B-3A	12	7	150	60	130	5 7/8	2 1/4	5 1/8		B	2.00	4.41	0.49	0.63	2.63	0.7
12N7A-4A 12N7B-4A	12	7	150	60	130	5 7/8	2 1/4	5 1/8		B	2.00	4.41	0.49	0.63	2.63	0.7
12N7-4A(J)	12	7	135	75	133	5 3/8	3	5 2/8		B	1.90	4.19	0.56	0.72	2.62	0.7
12N7B-3B	12	7	150	60	130	5 7/8	2 1/4	5 1/8		B	2.00	4.41	0.49	0.63	2.63	0.7
12N7B-4B	12	7	150	60	130	5 7/8	2 1/4	5 1/8		B	2.00	4.41	0.49	0.63	2.63	0.7
12N7C-3D	12	7	130	90	114	5 1/8	3 2/4	4 4/8		E	2.10	4.63	0.58	0.74	2.84	0.7
12N9-3A	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9
12N9-3A-1	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9

CONVENTIONAL FLOODED BATTERY

Battery Type	Nominal Voltage V	Capacity (10Hr) Ah	Battery Size						Assembly Figure (As Per Cover Polarity)	Terminal Type	Weight W/O Acid		Electrolyte		Total Weight for Battery	Regular Charge Current
			Dimensions-Millimeters (±2mm)			Dimensions-Inches (±1/16in)							Volume	Weight		
			L	W	H	L	W	H			Kg	Lbs	Liters	Kg	Kg	A
12N9-3B	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9
12N9-4B-1	12	9	135	75	139	5 3/8	3	5 4/8		B	2.27	5.00	0.56	0.72	2.99	0.9
12N10-3A	12	10	134	89	145	5 2/8	3 2/4	5 6/8		B	2.58	5.69	0.72	0.92	3.50	1.0
12N10-3A-1	12	10	134	89	145	5 2/8	3 2/4	5 6/8		B	2.58	5.69	0.72	0.92	3.50	1.0
12N10-3A-2	12	10	134	89	145	5 2/8	3 2/4	5 6/8		D	2.58	5.69	0.72	0.92	3.50	1.0
12N10-3B	12	10	134	89	145	5 2/8	3 2/4	5 6/8		B	2.58	5.69	0.72	0.92	3.50	1.0
12N10-3B-1	12	10	134	89	145	5 2/8	3 2/4	5 6/8		A	2.58	5.69	0.72	0.92	3.50	1.0
12N12A-4A-1	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	3.16	6.97	0.70	0.90	4.06	1.2
12N12A-4A-1(J)	12	12	134	81	160	5 2/8	3 1/4	6 2/8		B	2.88	6.35	0.72	0.92	3.80	1.2
12N14-3A	12	14	134	89	166	5 2/8	3 2/4	6 4/8		B	3.25	7.16	0.84	1.08	4.33	1.4
12N14-3B	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.25	7.16	0.84	1.08	4.33	1.4
12N14-3A2	12	14	134	89	166	5 2/8	3 2/4	6 4/8		D	3.25	7.16	0.84	1.08	4.33	1.4
12N16-3A	12	16	175	100	155	6 7/8	4	6 1/8		B	3.85	8.49	1.24	1.59	5.44	1.6
12N16-3B	12	16	175	100	155	6 7/8	4	6 1/8		B	3.85	8.49	1.24	1.59	5.44	1.6
12N16-4B	12	16	175	100	155	7	3 7/8	6		B	3.85	8.49	1.24	1.59	5.44	1.6
12C16A-3A	12	19	186	82	171	7 1/4	3 2/8	6 3/4		G	4.57	10.07	1.04	1.33	5.90	1.9
12C16A-3B	12	19	186	82	171	7 1/4	3 2/8	6 3/4		G	4.57	10.07	1.04	1.33	5.90	1.9
12N18-3	12	18	205	90	162	8	3 4/8	6 2/4		B	4.30	9.48	1.25	1.60	5.90	1.8
12N18-3-1	12	18	205	90	162	8	3 4/8	6 2/4		C	4.35	9.59	1.25	1.60	5.95	1.8
12N18-3A	12	18	205	90	162	8	3 4/8	6 2/4		C	4.35	9.59	1.25	1.60	5.95	1.8
12N18-4A	12	18	205	90	162	8	3 4/8	6 2/4		C	4.35	9.59	1.25	1.60	5.95	1.8
12N18-3B	12	18	205	90	162	8	3 4/8	6 2/4		C	4.35	9.59	1.25	1.60	5.95	1.8
12N24-3	12	24	184	124	175	7 1/4	4 7/8	7		G	5.33	11.75	1.82	2.33	7.66	2.4
12N24-4	12	24	184	124	175	7 1/4	4 7/8	7		G	5.33	11.75	1.82	2.33	7.66	2.4
12N24-3A	12	24	184	124	175	7 1/4	4 7/8	7		G	5.33	11.75	1.82	2.33	7.66	2.4
12N24-4A	12	24	184	124	175	7 1/4	4 7/8	7		G	5.33	11.75	1.82	2.33	7.66	2.4
CHD4-12	12	28	205	130	165	8 1/8	5 1/8	6 4/8		H	6.03	13.29	2.06	2.63	8.66	2.8

■ Maintenance Free Battery

Model	Energizer	Deka	Champion	Power-Sonic	GS (JSB)	Napa	GS (ZYI)	Wal-Mart	Yacht	Motocross	Yuasa	Sears
LT4B-BS	_	_	_	PTX4B-BS	_	_	_	_	_	M62T4B	YT4B-BS	44150
LTR4A-BS	_	_	_	PTR4A-BS	GTR4A-5	_	_	_	_	M62R4A	YTR4A-BS	44151
LTX4L-BS/EBX4L-BS	02077610	_	4LBS	PTX4L-BS	GT4L-BS	740-1865	GTX4L-BS	_	CT4L-BS CTX4L-BS	M62X4B	YTX4L-BS	44015
LTX5L-BS/EBX5L-BS	_	_	5LBS	PTX5L-BS	GTX5L-BS	740-1830	GTX5L-BS	_	CT5L-BS CTX5L-BS	M32X5B	YTX5L-BS	44022
EBZ5-3	_	_	_	PTZ5S	GTZ5S	_	_	_	_	_	_	_
LTZ7-3/EBZ7-3	_	_	_	PTZ7S	GTZ7S	_	_	_	CTZ7S	M727ZS	YTZ7S	44200
LTX7L-BS/EBX7L-BS	_	_	_	PTX7L-BS	GTX7L-BS	_	GTX7L-BS	_	CTX7L-BS	M327BS	YTX7L-BS	44024
LTX7A-BS/EBX7A-BS	_	_	_	PTX7A-BS	GTX7A-BS	_	GTX7A-BS	_	CTX7A-BS	M32X7A	YTX7A-BS	44023
LT7B-4/EB7B-4	_	_	_	PT7B-4	GT7B-4	_	_	_	CT7B-4	M62T7B	YT7B-BS	44153
LTX9-BS/EBX9-BS/MX9-4	02420400	ETX9	9BS	PTX9-BS	GTX9-BS	740-1825	GTX9-BS	ES9BS	CTX9-BS	M329BS/ M429BS	YTX9-BS	44025
LT9B-4/EB9B-4	_	_	_	PT9B-4	GT9B-4	_	_	_	CT9B-4	M729B4	YT9B-4	44206
LTZ10-4/EBZ10A-4	_	_	_	PTZ10S	GTZ10S	_	_	_	CTZ10S	M7210A	YTZ10S	44210
EB12A-BS	_	_	_	PTX12A-BS	_	_	_	_	CT12A-BS	M32ABS	YT12A-BS	_
LTX12-BS/EBX12-BS/MX12- 4	02078210	ETX12	12BS	PTX12-BS	GTX12-BS	740-1866	GTX12-BS	ES12BS	CTX12-BS	M3RH2S/ M4RH2S	YTX12-BS	44016
LT12B-4/EB12B-4	_	_	_	PT12B-4	GT12B-4	_	GT12B-4	_	CT12B-4	M6212B	YT12B-BS	44159
LTZ12-4/EBZ12A-4	_	_	_	PTZ12S	GTZ12S	_	_	_	_	M7212A	YTZ12S	44215
LTX14-BS/EBX14-BS/M X14-4	02420500	ETX14	14BS	PTX14-BS	_	740-1886	GTX14-BS	ES14BS	CTX14-BS	M3RH4S/ M4RH4S	YTX14-BS	44017
LTX14L-BS/EB X14L-BS/MX14-3	_	_	_	PTX14L-BS	_	_	_	_	_	_	YTX14L-BS	_
LTX14AH-BS/ EBX14AH-BS/MX15-4	_	ETX15	_	PTX14AH-BS	_	_	GT14-BS	_	_	M62H4A/ M72H4A	YTX14AH-BS	44004
LTX14AHL-BS/ EBX14AHL-BS/MX15-3	_	ETX15L	_	PTX14AHL-BS	_	_	GT14L-BS	_	_	M62H4L/ M72H4L	YTX14AHL-BS	44005
LT14B-4/EB14B-4	_	_	_	PT14B-4	GT14B-4	_	_	_	CT14B-4	M724B4	YT14B-4	44220
LTZ14-4/EBZ14A-4/EBZ14- 4	_	_	_	PTZ14S	GTZ14S	_	_	_	_	M72Z14	YTZ14S	44217
LTX15L-BS/EBX15L-BS	_	_	_	PTX15L-BS	_	_	_	_	CTX15L-BS	M6215L	YTX15L-BS	44162
LTX16-BS/EBX16-BS	_	_	_	PTX16-BS	_	_	_	_	CTX16-BS	M32X6S	YTX16-BS	44020
LTX16-BS-1	_	_	_	PTX16-BS-1	_	_	_	_	CTX16-BS-1	M32X61	YTX16-BS-1	44019
LT16CL-BS	_	ETX16L	_	PTX19CL-BS	_	_	GT16L-BS	_	_	_	_	_
EB16B-BS/MX16-4	_	ETX16	_	PTX19-BS	_	740-1887	GT16-BS	_	CTX19-BS	_	_	_
EB16BL-BS/MX16-3	_	ETX16L	_	PTX19L-BS	_	740-1888	GT16L-BS	_	CTX19L-BS	_	_	_
LTX18L-BS/EBX18L-BS	_	ETX18L	_	PTX18L-BS	_	740-1889	GTX18L-BS	_	CTX18L-BS	_	_	44006
LTX20-BS/EBX20-BS	_	_	_	PTX20-BS	_	740-1824	GTX20-BS	_	CTX20-BS	M32RBS/ M42RBS	YTX20-BS	44028
LTX20L-BS/EBX20L-BS	_	ETX20L	20L-BS	PTX20L-BS	_	740-1890	GTX20L-BS	ES20LBS	CTX20L-BS	M320BS/ M4220BS	YTX20L-BS	44027
LTX24H-BS/EBX24H-BS	_	_	_	PIX50-BS	_	_	_	_	CTX18-BS	_	_	_
LTX24HL-BS/EBX24HL-BS /MX18-3	_	ETX18L	_	PIX50L-BS	_	740-1889	GTX18L-BS	_	CTX18L-BS CTX24HL-BS	M6250H/ M7250H	YTX24HL-BS	44006
EBX30L-BS	_	_	_	PIX30L-BS	_	_	_	_	CTX30L	M7230L	YIX30L	_

555 Tiger Head BATTERY SUPPLIER CROSS REFERENCE

■ High Performa nce Flooded Battery

Model	Energizer	Deka	Champion	Power-Sonic	GS (JSB)	Napa	GS (ZYI)	Wal-Mart	Yacht	Motocross	Yuasa	Sears
LB2.5L-C	_	_	_	CB2.5L-C	GM2.5A-3C-3	_	CB2.5L-C	_	CB2.5L-C	M225LC/ M325LC	YB2.5L-C	44035
LB2.5L-C-1	_	_	_	CB2.5L-C-1	GM2.5A-3C-1	_	CB2.5L-C-1	_	CB2.5L-C-1	M22LC1/ M32LC1	YB2.5L-C-1	44036
LB3L-A	_	_	_	CB3L-A	GM3-3A	_	CB3L-A	_	CB3L-A	M223LA/ M323LA	YB3L-A	44037
LB3L-B	_	_	_	CB3L-B	GM3-3B	_	CB3L-B	_	CB3L-B	M223LB	YB3L-B	44038
LB4L-A	_	_	_	CB4L-A	GM4A-3B	_	CB4L-A	_	CB4L-A	M224LA	YB4L-A	44039
LB4L-B	_	_	4LB	CB4L-B	GM4-3B	740-1861	CB4L-B	_	CB4L-B	M224LB/ M324LB	YB4L-B	44014
LB5L-B	02420300	_	_	CB5L-B	GM5Z-3B	740-1868	CB5L-B	_	CB5L-B	M225LB/ M325LB	YB5L-B	44353
LB7-A	_	_	_	CB7-A	GM7Z-4A	_	CB7-A	_	CB7-A	M227AY	YB7-A	44040
LB7C-A	_	_	_	CB7C-A	GM7CZ-3D	_	_	_	CB7C-A	M227CY	YB7C-A	44041
LB7L-B	_	_	_	CB7L-B	GM7-3B-1	_	CB7L-B	_	CB7L-B	M2273Y	YB7L-B	44042
LB9-B	02071980	_	_	CB9-B	GM9Z-4B	740-1858	CB9-B	_	CB9-B	M229BY/ M329BY	YB9-B	44356
LB9L-B	_	_	9LB	CB9L-B	GM9Z-3B	740-1837	CB9L-B	_	CB9L-B	M229LY/ M329LY	YB9L-B	44045
LB9A-A	_	_	9AA	CB9A-A	GM9AZ-4A	740-1872	CB9A-A	_	CB9A-A	M229AY/ M329AY	YB9A-A	44043
LB9L-A1	_	_	_	CB9L-A2	_	_	CB9L-A2	_	CB9L-A2	M2292Y	YB9L-A2	44044
LB10A-A2	_	_	_	CB10A-A2	_	740-1842	CB10A-A2	_	CB10A-A2	M221AY/ M321AY	YB10A-A2	44046
LB10L-A2	02073210	_	10LA2	CB10L-A2	GM10Z-3A	740-1857	CB10L-A2	ES10LA2	CB10L-A2	M2210Y/ M3210Y	YB10L-A2	44355
LB10L-B2	_	_	_	CB10L-B2	_	_	CB10L-B2	_	CB10L-B2	M221L2	YB10L-B2	44048
LB10L-B	_	_	_	CB10L-B	GM10-3B	740-1831	CB10L-B	_	CB10L-B	M221LB/ M321LB	YB10L-B	44047
LB12A-A	02074490	_	12AA	CB12A-A	GM12AZ-4A-1	740-1854	CB12A-A	ES12AA	CB12A-A	M2212Y/ M3212Y	YB12A-A	44358
LB12A-B	_	_	_	CB12A-B	_	_	_	_	CB12A-B	M222AB	YB12A-B	44053
LB12AL-A	_	_	12ALA	CB12AL-A	GM12AZ-3A-1	740-1873	CB12AL-A	_	CB12AL-A	M2221Y/ M3221Y	YB12AL-A	44052
LB12AL-A2	_	_	_	CB12AL-A2	_	_	_	_	CB12AL-A2	M22212	YB12AL-A2	_
LB12B-B2	_	_	_	CB12B-B2	GM12B-4B	_	CB12B-B2	_	CB12B-B2	M221B2	YB12B-B2	44054
LB12C-A	_	_	_	CB12C-A	GM12CZ-4A-2	740-1823	CB12C-A	_	CB12C-A	M222CA	YB12C-A	44055
LB14-A2	02074520	_	_	CB14-A2	GM14Z-4A	740-1864	CB14-A2	_	CB14-A2	M2214H/ M3214H	YB14-A2	44363
LB14A-A1	_	_	14AA1	CB14A-A	GM14AZ-4A	740-1826	CB14A-A	_	CB14A-A1	M224A1/ M324A1	YB14A-A1	44056
LB14A-A2	02074650	_	14AA2	CB14A-A2	GM14AZ-4A-1	740-1860	CB14A-A2	ES14AA2	CB14A-A2	M2214A/ M3214A	YB14A-A2	44361
LB14L-A1	_	_	_	CB14L-A1	GM14Z-3A-1	_	CB14L-A1	_	CB14L-A1	M22141	YB14L-A1	44057
LB14L-A2	02074780	_	14LA2	CB14L-A2	GM14Z-3A	740-1851	CB14L-A2	ES14LA2	CB14L-A2	M2214Y/ M3214Y	YB14L-A2	44364
LB14L-B2	_	_	_	CB14L-B2	GM14Z-3B	740-1828	CB14L-B2	_	CB14L-B2	M2214B	YB14L-B2	44059
LB14-B2	_	_	_	CB14-B2	_	_	CB14-B2	_	CB14-B2	M224B2	YB14-B2	44060
SLB14L-A2	_	_	_	SCB14L-A2	_	_	SCB14L-A2	_	SCB14L-A2	M2214S	SYB14L-A2	44061
SLB14L-B2	_	_	_	SCB14L-B2	_	_	SCB14L-B2	_	SCB14L-B2	M22B4S	SYB14L-B2	44062
LB16AL-A2	_	_	16ALA2	CB16AL-A2	GM16A-3A	740-1877	CB16AL-A2	_	CB16AL-A2	M22162/ M32162	YB16AL-A2	44063
HLB16A-A HLB16A-AB	_	_	16AA	HCB16A-AB	GM16-T	740-1867	HCB16A-A	_	HCB16A-A HCB16A-AB	M22H6B/ M32H6B	HYB16A-AB	44064
LB16-B	02074940	_	16B	CB16-B	GM16Z-4BH	740-1852	CB16-B	ES16B	CB16-B	M2216Y/ M3216Y	YB16-B	44366
LB16L-B	_	_	16LB	CB16L-B	GM16Z-3B	740-1827	CB16L-B	_	CB16L-B	M2216K/ M3216K	YB16L-B	44065
LB16L-A2	02420600	_	_	CB16HL-A-LM	_	_	_	_	CB16HL-A-LM	M2H16C/ M3H16C	YB16HL-A-CX	44369
LB16B-A	_	_	_	CB16B-A	GM16B-4A	_	_	_	CB16B-A	M2216B	YB16B-A	44066
LB16B-A1	_	_	_	CB16B-A1	_	_	_	_	CB16B-A1	M22161	YB16B-A1	44067
LB16CL-B	02077580	_	16CLB	CB16CL-B	GM16AZ-3B	740-1862	CB16CL-B	ES16CLB	CB16CL-B	M2S6CL/ M3S6CL	YB16CL-B	44001
LB18-A	_	_	_	CB18-A	GM18A-4A	740-1874	CB18-A	_	CB18-A	M2281Y/ M3281Y	YB18-A	44070
LB18L-A	_	_	18LA	CB18L-A	GM18A-3A	740-1871	CB18L-A	_	CB18L-A	M2218L/ M3218L	YB18L-A	44071
L50-N18A-A	_	_	_	C50-N18A-A	_	_	_	_	C50-N18A-A	M228AY	Y50-N18A-A	44072
L50-N18L-A3	02420200	_	18LA2	C50-N18L-A3	GM18Z-3A(S)	740-1855	C50-N18L-A3	ES50N18LA3	C50-N18L-A C50-N18L-A3	M2218Y/M3218Y M228A3/M328A3	Y50-N18L-A Y50-N18L-A3	44359
12C16A-3B	_	_	_	51814	_	_	_	_	_	M2219B	51814	_
12C16A-3A	_	_	_	51913	_	_	_	_	_	M2219A	51913	_
L50-N18L-A	_	_	_	C50-N18L-A-LM	_	_	_	_	C50-N18L-A-LM	M2218C/ M3218C	Y50-N18L-A-CX	44030
SL50-N18L-AT	_	_	_	SC50-N18L-AT	_	740-1878	_	_	SC50-N18L-AT	M22S8T	SY50-N18L-AT	44073

BATTERY SUPPLIER CROSS REFERENCE

■ High Performan ce Flooded Battery

Model	Energiz er	Deka	Champio n	Power-Sonic	GS (JSB)	Napa	GS (ZYI)	Wal-Mart	Yacht	Motocross	Yuasa	Sears
L60-N24-A	_	_	_	C60-N24-A	_	_	_	_	C60-N24-A	M2224A	Y60-N24-A	44074
L60-N24L-A	_	_	_	C60-N24L-A	_	740-1880	C60-N24AL-A	_	C60-N24L-A	_	_	_
L60-N24AL-B	_	_	_	C60-N24AL-B	_	_	_	_	C60-N24AL-B	M2224B	Y60-N24AL-B	44075
LB30L-B	_	_	_	CB30L-B	_	_	_	_	CB30L-B	M22H30	YB30L-B	44033
LB30CL-B	_	_	_	CB30CL-B	_	_	_	_	_	M2230C	YB30CL-B	_
L60-N30L-A	_	_	_	53030	_	_	_	_	C60-N30L-A	M2230B	53030	_

■ Conventio nal Flooded Battery

Model	Energizer	Deka	Champion	Power-Sonic	GS (JSB)	Napa	GS (ZYI)	Wal-Mart	Yacht	Motocross	Yuasa	Sears
12N5-3B	_	_	_	12N5-3B	12N5-3B	740-1883	12N5-3B	_	12N5-3B	M2253B/ M3253B	12N5-3B	44079
12N5-4B	_	_	54B	12N5-4B		740-1876	12N5-4B	_	12N5-4B	M2250B/ M3250B	12N5-4B	44080
12N5.5-4A	_	_	_	12N5.5-4A		_	12N5.5-4A	_	12N5.5-4A	M2254A/ M3254A	12N5.5-4A	44082
12N5.5-3B	_	_	_	12N5.5-3B	12N5.5-3B	_	12N5.5-3B	_	12N5.5-3B	M2255B/ M3255B	12N5.5-3B	44081
12N5.5A-3B	_	_	55A3B	12N5.5A-3B	12N5.5A-3B	740-1875	12N5.5A-3B	_	12N5.5A-3B	M22A5B/ M32A5B	12N5.5A-3B	44083
12N7-3B	_	_	73B	12N7-3B	12N7-3B	740-1881	12N7-3B	_	12N7-3B	M2273B/ M3273B	12N7-3B	44084
12N7-4A	_	_	74A	12N7-4A	12N7-4A	740-1870	12N7-4A	_	12N7-4A	M2274A/ M3274A	12N7-4A	44085
12N7-4B	_	_	_	12N7-4B	12N7-4B	740-1882	12N7-4B	_	12N7-4B	M2270B/ M3270B	12N7-4B	44086
12N7D-3B	_	_	_	12N7D-3B	12N7D-3B	_	12N7D-3B	_	12N7D-3B	M227DB	12N7D-3B	44087
12N9-3B	_	_	_	12N9-3B	12N9-3B	_	12N9-3B	_	12N9-3B	M2293B/ M3293B	12N9-3B	44090
12N9-3A-1	_	_	_	12N9-3A-1		_	12N9-3A-1	_	12N9-3A-1	M22931	12N9-3A-1	44089
12N9-4B-1	_	_	94B1	12N9-4B-1	12N9-4B-1	740-1869	12N9-4B-1	ES12N94B1	12N9-4B-1	M2290B/ M3290B	12N9-4B-1	_
12N10-3A	_	_	_	12N10-3A	12N10-3A	_	_	_	12N10-3A	M2210A	12N10-3A	44092
12N10-3A-1	_	_	_	12N10-3A-1		_	_	_	12N10-3A-1	M22101	12N10-3A-1	44093
12N11-3A-1	_	_	_	12N11-3A-1	12N11-3A-1	_	_	_	12N11-3A-1	M2211B/ M3211B	12N11-3A-1	44096
12N12A-4A-1	_	_	12A4A1	12N12A-4A-1	12N12A-4A-1	740-1853	12N12A-4A-1	_	12N12A-4A-1	M2221B/ M3221B	12N12A-4A-1	_
12N14-3A2	_	_	143A	12N14-3A	12N14-3A	740-1856	12N14-3A	_	12N14-3A	M2241B/ M3241B	12N14-3A	_
12N24-3	_	_	_	12N24-3	2N24-3	_	_	_	12N24-3	M2224D	12N24-3	44102
CHD4-12	_	_	H12	CHD4-12	GM32-4A	740-1859	CHD4-12	_	CHD4-12	M22H12/ M32H12	YHD-12	44357

BATTERY CROSS REFERENCE CHART

Factory Activated Maintenance Free	Dry Charged MAINTENANCE FREE UPGRADE	Dry Charged Maintenance Free	High Performance Flooded	Conventional F looded
LT4-3/EB4-3	-	LTX4L-BS/EBX4L-BS	LB4L-A/LB4L-B	_
LT5A-3-1	_	LT5AL-BS	LB5L-B	12N5-3B
LT5-3/EB5-3	_	LTX5L-BS/EBX5L-BS	_	_
_	_	_	LB7L-B	12N7-3B
_	_	_	LB7-A	12N7-4A
LT7A-4/EB7A-4	_	LTX7A-BS/EBX7A-BS	_	_
LT7-3/EB7-3	_	LTX7L-BS/EBX7L-BS	_	_
LT9A-4	_	LT9A-BS	LB9-B	12N9-4B-1
_	_	_	LB9L-B	12N9-3B
_	_	_	LB9L-A1	12N9-3A-1
LT9-4/EB9-4	_	LTX9-BS/EBX9-BS	_	_
_	_	_	LB12A-A	12N12A-4A-1
LT12-4/EB12-4//MX12-4	_	LTX12-BS/EBX12-BS	_	_
LT14A-4/EB14A-4/MX15-4	_	LTX14AH-BS/EBX14AH-BS	LB14-A2/LB14-B2 LB14A-A1/LB14A-A2	_
LT14A-3/EB14A-3/MX15-3	_	LTX14AHL-BS/EBX14HL-BS	LB14L-A2/LB14L-B2 SLB14L-A2/SLB14L-B2	12N14-3A2
LT14-4/EB14C-4	_	LTX14-BS/EBX14-BS	_	_
LT14-3/EB14C-3	_	LTX14L-BS/EBX14L-BS	_	_
LT15-3/EB15-3	_	LTX15L-BS/EBX15L-BS	_	_
LT20CH-4/EB20CH-4	LTX20CH-BS/EBX20CH-BS	LTX16-BS/EBX16-BS	_	_
EB16B-4/MX16-4	_	EB16B-BS	LB16-B	_
EB16B-3/MX16-3	_	EB16BL-BS	LB16L-B	_
LT16C-3	_	LT16CL-BS	LB16CL-B	_
LT20-4/EB20-4	_	LTX20-BS/EBX20-BS	LB18-A	_
LT20-3/EB20-3	_	LTX20L-BS/EBX20L-BS	LB18L-A	_
EB20P-3	_	EBX20PL-BS	12C16A-3A	_
LT24-4/EB24-4	LTX24H-BS/EBX24H-BS	LTX18-BS/EBX18-BS	L50-N18A-A	_
LT24-3/EB24-3/MX18-3	LTX24HL-BS/EBX24HL-BS	LTX18L-BS/EBX18L-BS	L50-N18L-A3/SL50-N18L-AT	_
LT30-3/EB30-3/MX30-3	_	EBX30L-BS	LB30L-B/L60-N24AL-B/L60-N30L-A	_

MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
BUELL						
1200	X1 Lightning	99-02	_	LT20-3/EB20-3	_	_
	S1 Lightning	96-99	MX14-4	LT14-4 EB14C-4*	LTX14-BS EBX14-BS*	_
	S3,S3T Thunderbolt	97-02	_	"LT20-3" EB20-3	LTX20L-BS EBX20L-BS	_
	M2 Cyclone	97-02	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	S2,S2T Thunderbolt	94-96	MX16-4	EB16B-4	EB16B-BS	*LB16-B
	RR1200	88-90	MX16-4	EB16B-4	EB16B-BS	*LB16-B
	RS1200	89-93	MX16-4	EB16B-4	EB16B-BS	*LB16-B
	RSS1200	91-93	MX16-4	EB16B-4	EB16B-BS	*LB16-B
	XB12R Fire bolt, XB125S Lightning	04-10	MX14-4	LT14-4 EB14C-4	_	_
	XB12X Ulysses	06-10	MX14-4	LT14-4/EB14C-4	_	_
1125	1125R	08-10	MX14-4	LT14-4/EB14C-4	_	
1000	RR1000	87	MX16-4	EB16B-4	EB16B-BS	_
984	XB9R Firebolt, XB9S Lightening	02-10	MX14-4	LT14-4/EB14C-4	_	_
500	Blast	00-09	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
CANNONDALE						
440	C440,E440,X440,X440S	02-03	_	EBZ7-3	_	_
	EX400,MX400,XC400	00-01	_	EBZ7-3	LTX5L-BS EBX5L-BS	_
EXCELSIOR-HENDERSON						
1386	SuperX	99-00	_	LT20-3/EB20-3	LTX20L-BS EBX20L-BS	_
HARLEY-DAVIDSON						
1803	CVO FL (Touring)	07-15	MX30-3	LT30-3/EB30-3	EBX30L-BS	_
	CVO FXD Fat Bob (Dyna)	07-15	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	CVO FLST (Softail)	07-15	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
1690	FLHTK (Touring)	10-11	MX30-3	LT30-3/EB30-3	EBX30L-BS	_
	FLH,TLT (Touring)	11-15	MX30-3	LT30-3/EB30-3	EBX30L-BS	_
	FLS (Softail)	12-15	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	FXD (Dyna)	12-15	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
1584	FXD (Dyna)	07-11	_	T20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	FXST, FLST (Softail)	07-11	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
1450	FL, FLH (Touring) FXD (Dyna)	07-10 99-06	MX30-3 _	LT30-3/EB30-3 LT20-3 EB20-3	EBX30L-BS LTX20L-BS EBX20L-BS	_ _
	FXST,FLST (Softail)	00-06	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	FL,FLH (Touring)	00-06	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B
	FL,FLH (Touring)	99	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B
1340	FXD,FXST (Dyna)	97-99	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	FXD,FXST (Dyna)	91-96	MX16-3	MX16-3/EB16B-3<	EB16BL-BS<	*LB16L-A2
	FX,FXR (Dyna)	79-94	MX16-4	EB16B-4<	EB16B-BS<	*LB16-B
	FXR (Dyna)	99-00	MX16-4	EB16B-4	EB16B-BS	*LB16-B
	FLST (Softail)	97-99	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
HARLEY-DAVIDSON						
	FLST (Softail)	91-96	MX16-3	EB16B-3	EB16BL-BS	*LB16L-A2
	FXST, FLST	84-90	MX16-4	EB16B-4	EB16B-BS	*LB16-B
	FL, FLH (Touring)	80-96	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	_
	FL, FLH (Touring)	97-98	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B
	FL. FLH (Touring)	78-84	_	_	_	CHD4-12
1250	VRSC V-Rod	08-09	_	LT20-3/EB20-3	_	_
1200	XL,XLH (Sportster)	04-09	MX14-3	LT14-3 EB14C-3	LTX14L-BS EBX14L-BS	_
	XL,XLH (Sportster)	97-03	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	XL,XLH (Sportster)	87-96	MX16-4	EB16B-4	EB16B-BS	*LB16-B
	FX (Electric Start)	71-78	MX16-4	EB16B-4	EB16B-BS	*LB16-B
	FX (Kick Start)	71-72	_	_	_	*LB7-A 12N7-4A
1130	VRSD (V-Rod)	02-07	MX14-4	LT14-4/EB14C-4	_	_
1100	XLSeries(Sportster)	87-93	MX16-4	EB16B-4	EB16B-BS	*LB16-B
1000	XL Series(Sportster)	79-85	MX16-4	EB16B-4	EB16B-BS	*LB16-B
	XLCH Series (Sportster)	70-78	_	_	_	*LB7-A 12N7-4A
	XLCR Café Racer	77-78	MX16-4	EB16B-4	EB16B-BS	*LB16-B
	XLH (Sportster)	67-78		_	_	CHD4-12
	XLX-61,XR1000	83-85	MX16-4	EB16B-4	EB16B-BS	*LB16-B
883	XL,XLH (Sportster)	04-14	MX14-3	LT14-3 EB14C-3	LTX14L-BS EBX14L-BS	_
	XL,XLH (Sportster)	97-	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	XLH (Sportster)	86-96	MX16-4	EB16B-4	EB16B-BS	*LB16-B
500	MT500 (Military)	All	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
350	SS350	All	_	_	_	6N11A-1B
250	SS250,SX250	75-78	_	_	_	*LB7L-B 12N7-3B
175	SS175,SX175	74-78	_	_	_	*LB7L-B 12N7-3B
125	SS125,SX125	74-78	_	_	_	*LB7L-B 12N7-3B
	SXT125	75-78	_	_	_	*LB7L-B 12N7-3B
	TX125	73-78	_	_	_	*LB7L-B 12N7-3B
90	Z90	73-76	_	_	_	*LB7L-B 12N7-3B
HONDA						
1800	GL1800 Gold Wing	09-15	MX20-3	_	_	_
	GL1800 Gold Wing	01-09	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	NRX1800 Valkyrie Rune	04-05	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	VTX1800C	02-11	_	LT20-3	LTX20L-BS	_
	VTX1800R Retro	02-11	_	EB20-3	EBX20L-BS	
1500	GI1500 Gold Wing	88-00	_	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	*Ln50-N18L-A3
	GL1500 Valkyrie	97-03	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
1300	CTX1300	14	_	EBZ14A-4	_	_
	ST1300, A, P	03-14	_	EBZ14A-4	_	_

* Must use adaptorkit available from Buell. "*" + "Type": High performance flooded battery for example, *LB16-B < Requires use ofCover/Spacer Kit.

MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
HONDA						
1300	VTX1300C,R,S, Retro	03-14	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	VT1300CS,CR,CXA FURY	09-14	_	EBZ14A-4	_	_
	CB1300 Super Four	01-13	_	EBZ14A-4	_	_
1200	VFR1200F	10-14	_	EBZ14A-4	_	_
	VFR1200XD	13	_	EBZ14A-4	_	_
	GL1200 Gold Wing	84-87	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	*LN50-N18L-A3
1100	CB1100	10-14	_	EBZ14A-4	_	_
	CB1100F Super Sport	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	CBR1100XX	01-04	_	EBZ12A-4	_	_
	CBR1100XX	97-00	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	GL1100 Gold Wing	80-83	_	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	*L50-N18L-A3
	ST1100,ABS-TCS, 1100A	91-02	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	VF1100C V65 Magna	83-86	_	LT20-4 EB20-4#	LTX20-BS EBX20-BS#	*LB18-A
	VF1100S V65 Sabre	84-85	_	LT20-3 EB20-3#	LTX20L-BS EBX20L-BS#	*LB18L-A
	VT1100 Shadow, C2 Sabre	00-07	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	VT1100C,C3,T Shadow (Spirit, Aero, A.C.E.Tourer)	01-07	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	VT1100C,C3,T Shadow (Spirit,Aero, A.C.E. Tourer)	98-00	_	_	_	*HLB16A-AB
	VT1100C ShadowSpirit	85-97	_	_	_	*HLB16A-AB
	VT1100C2 Shadow A.C.E.	95-99	_	_	_	*HLB16A-AB
1000	CB1000	94-95	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	CB1000C Custom	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	CB1000F Hurricane	87-96	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-B2
	CB1000R	09-14	_	EBZ10A-4	_	_
	CBF1000F	09-10	_	EBZ10A-4	_	_
	CBR1000RA(ABS)	08-15	_	EBZ10A-4	_	_
	CBR1000RR	08-15	_	EBZ7-3	_	_
	CBR1000RR	04-07	_	EBZ10A-4	_	_
	CBX1000 Super Sport	79-82	_ _	LT20-3 EB20-3#	LTX20L-BS EBX20L-BS#	*LB18L-A
	CBX1000 Super Sport(Opt)	82	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	*L50-N18L-A3
	GI1000 Gold Wing	75-79	MX15-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	*L50-N18L-A3
	RVT1000R RC51	00-06	_	EBZ12A-4	_	_
	VTR1000F Super Hawk	01-05	_	EBZ12A-4	_	_
	VTR1000 Super Hawk	97-00	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	VF1000R,F	84-86	_	_	_	*LB16B-A
954	CBR954RR	02-03	_	EBZ10A-4	_	_
929	CBR929RR,RE	00-01	_	EBZ10A-4	_	_
919	CB900F (919)	02-06	_	EBZ10A-4	_	_
900	CB900C,F	80-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	CBR900,RR	93-99	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
800	PC800 Pacific Coast	89-98	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	VFR800,A Interceptor,ABS	02-12	_	EBZ12A-4	_	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
HONDA						
800	VFR800,A Interceptor	14	_	EBZ12A-4	_	_
	VF800FI Interceptor	98-01	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	VT800C Shadow	88	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-B2
750	CB750 Nighthawk	91-03	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	CB750A Hondomatic	76-78	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	*L50-N18L-A3
	CB750C Custom	80-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	CB750F Super Sport	75-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	CB750K Four	69-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	CB750C Limited Ed.	79	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	CB750C Nighthawk	82-83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	RVF750R (RC45)	94	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS _	_
	VF750C V45 Magna	88	_	_	_	*LB12A-A
	VF750C V45 Magna	82-83	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	VF750C,C2,D Magna	94-03	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	VF750F V45 Interceptor	83-84	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	VF750S V45 Sabre	82-83	MX15-3	LT14A-3 EB14A-3+	LTX14AHL-BS EBX14AHL-BS+	*SLB14L-A2+
	VF750F Interceptor	86	_	_	_	*LB12A-B
	VFR750F	90-97	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	VFR750R (RC30)	90	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	VT750C,CA,C2 Shadow Spirit, Aero	07-09	_	EBZ12A-4	_	_
	VT750C,C2,C2B RS Shadow	10-15	_	EBZ14A-4	_	_
	VT750C,CA	04-09	_	EBZ12A-4	_	_
	VT750C Shadow	98-00	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	VT750CD,CD2 Shadow Deluxe	98-02	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	VT750CDA,B,C,D Shadow A.C.E. Deluxe	02-03	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	VT750C Shadow	83		_		*HLB16A-AB
	VT750DC Shadow Spirit	01-07	MX15-4	EBZ14A-4	_	_
	VT750C,C2,C2B RS Shadow	10-14	_	EBZ14A-4	_	_
700	CTX700	14	_	EBZ12A-4	_	_
	CB700SC Nighthawk`S	84-86		_	_	*LB14L-A1
	NC700X	12-15	_	EBZ12A-4	_	_
	NC700J(NM4)	15	_	EBZ12A-4	_	_
	NT700V	10-13	_	EBZ14A-4	_	_
	VF700C Magna	87	_	_	_	*LB12A-A
	VF700C Magna	84-86	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	VF700F Interceptor	84-85	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	VF700S Sabre	84-85	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	VF700F Interceptor	86-87	_	_	_	*LB12A-B

\+ Eliminates need for sensor (needs to be disabled)

\# The LT20-3/EB20-3 series batteries may be used as an optional upgrade, but some modification to the hold down may be necessary. See battery label for retrofit cautions.

MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	HONDA					
700	VT700C Shadow	86-87	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-B2
	VT700C Shadow	84-85	_	_	_	*HLB16A-AB
680	DN-01	09	_	EBZ14A-4	_	_
650	CB650, Custom	79-82	_	_	_	*LB12A-A
	CB650SC Nighthawk	83-85	_	_	_	*LB12AL-A
	CB650SC Nighthawk	82	_	_	_	*LB12A-A
	CX650C Custom	83	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	CX650T Turbo	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	GL650I Silver Wing Interstate	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Nt650 Hawk GT	88-91	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_ _
	NT650V	_	_	_	LTX9-BS EBX9-BS	_
	Nx650	88-89	_	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	SLR650	_	_	_	LTX9-BS EBX9-BS	_
	Vigor 650	_	_	_	LTX9-BS EBX9-BS	_
	XR650L	93-15	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
600	CB600F	04-06	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_ _
	CBR600	87-00	_	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	CBR600F4i, 600RR	01-15	_	EBZ10A-4	_	_
	VT600C,CD,Shadow Deluxe	04-07	_	EBZ10A-4	_	_
	VT600C,CD Shadow Deluxe VLX	88-03	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	XL600R	83-87	_	_	_	*LB3L-A
	XL600V Transalp	89-90	_	_	_	*LB12A-B
	CB550 Four, K, SS	74-78	_	_	_	*LB12A-A 12N12A-4A-1
	CB550SC Nighthawk	83	_	_	_	*LB12AL-A
	CB500 Four, Twin	71-76	_	_	_	*LB12A-A 12N12A-4A-1
	CB500, C,D,T	78-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Ft500 Ascot	82-83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	GB500	89-90	_	_	_	*LB12A-B
	GL500,I Silver Wing	81-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	VF500C V30 Magna	84-85	_	_	_	*LB12A-A
	VF500F Interceptor	84-86	_	_	_	*LB12A-A
	VF500C Shadow	83-86	_	_	_	*LB12A-A
	VF500T Ascot	83-84	_	_	_	*LB12A-A
	XL500R	82	_	_	_	*LB3L-A
	XL500S	79-81	_	_	_	6N4-2A-4
450	CB450, SS	67-74	_	_	_	*LB12A-A 12N12A-4A-1
	CB400A	78	_	_	_	*LB12A-A
	CB450SC Nighthawk,T	82-86	_	_	_	*LB12A-A
	CL450 Scrambler	67-74	_	_	_	*LB12A-A 12N12A-4A-1
	CMX450C CRF450X	05-15	_	EBZ7-3	_	_
	Hondomatic,E	82-83	_	_	_	*LB12A-A
	CMX450C Rebel	86-87	_	_	_	*LB12A-A

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	HONDA					
400	CB400F CB-1	89-90	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	CB400F Super Sport	75-77	_	_	_	*LB12A-A 12N12A-4A-1
	CB400T Hawk,HawkII	78-81	_	_	_	*LB12A-A
	CB400TI Hawk I	78-79	_	_	_	*LB9-B 12N9-4B-1
	CM400 (All)	79-81	_	_	_	*LB12A-A
360	CB360, G, T	74-76	_	_	_	*LB12A-A 12N12A-4A-1
	CJ360T	76-77	_	_	_	*LB9-B 12N9-4B-1
	CL360 Scrambler	74-75	_	_	_	*LB12A-A 12N12A-4A-1
350	CB350 Super Sport4	68-74	_	_	_	*LB12A-A 12N12A-4A-1
	CL350 Scrambler	68-73	_	_	_	*LB12A-A 12N12A-4A-1
	SL350 Motosport	70-73	_	_	_	12N5-4B
	SL350 Motosport	69-70	_	_	_	*LB12A-A 12N12A-4A-1
	XL350	74-78	_	_	_	6N6-3B
	XL350R	84-85	_	_	_	*LB3L-A
305	CA77 DreamTouring (late)	63-69	_	_	_	12N9-3A-1
	CB77 Super hawk	61-68	_	_	_	12N9-3A-1
	CL77 Scrambler	65-68	_	_	_	12N5-4B
300	CB300F	15	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	CBR300R	15	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
250	CBR250R	11-13	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	CMX250C Rebel CA72 Dream Touring (late)	96-14	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	CA72 Dream Touring (late)	63-66	_	_		12N9-3A-1
	CB250 Nighthawk	91-09	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	CL72 Hawk	61-66	_	_	_	12N9-3A-1
	CL72 Scrambler	62-65	_	_	_	12N5-4B
	CM250C Custom	82-83	_	_	_	*LB9-B
	CMX250C Rebel	96-09	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	CMX250C Rebel,LTD	85-87	_	_	_	*LB9L-B
	CRF250X	04-09	_	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	_
	Mt250 Elsinore	74-76	_	_	_	6N6-3B
	NX250	88-90	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	VTR250 Interceptor VTR	88-90	_	_	_	*LB9-B
	XL250	72-76	_	_	_	6N6-3B
	XL250R	82-87	_	_	_	*LB3L-A
	XL250S	78-81	_	_	_	6N4-2A-4
	XL250L	91-96	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
230	CRF230F	03-15	_	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	_
	CRF230L,M	08-13	_	EBZ7-3	_	_
	CRF230L	14	_	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	_
	CRF230L	08-10		EBZ7-3	_	_
200	Cb200	74-76	_	_	_	*LB9-B 12N9-4B-1

^ See Battery supplier Cross Reference

MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	HONDA					
200	CL, CB200 Scrambler	74	_	_	_	*LB9-B 12N9-4B-1
	CM200T Twinstar	81-82	_	_	_	*LB9-B 12N9-4B-1
	Cm200T Twinstar	80	_	_	_	B54-6A
	TLR200 Reflex	86-87	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
	TR200 Fat Cat	87	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
	TR200 Fat Cat	86	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	XL200R	83-84	_	_	_	*LB3L-A
185	CM185T Twinstar	78-79	_	_	_	B54-6A
	XL185S	79-83	_	_	_	6N4-2A-4
175	CA175 Touring (CD175)	68-69	_	_	_	B54-6
	CA175 Touring (CD175K3)	69-70	_	_	_	B54-6A
	CB175,K Super Sport	69-73	_	_	_	*LB9-B 12N9-4B-1
	CL175, K Scrambler	68-73	_	_	_	*LB9-B 12N9-4B-1
	SL175 Motosport	70-72	_	_	_	12N5-4B
	XL175	73-78	_	_	_	6N6-3B
160	CB160 Sport	65-69	_	_	_	*LB9-B 12N9-4B-1
	CL160 Scrambler	66-68	_	_	_	*LB9-B 12N9-4B-1
150	CRF150F	06-15	_	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	_
125	CRF125F	14-15	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
	MSX123 Grom	14-15	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
	CB125S	81-82	_	_	_	6N6-3B-1
	CB125S	73-80	_	_	_	6N6-3B
	CL125A Scrambier (Twin)	67-69	_	_	_	B54-6
	CL125S Scrambler	73-75	_	_	_	6N4C-1B
	CT125 Trail	77	_	_	_	6N4C-1B
	MT125Elsinore	74-76	_	_	_	6N6-3B
	NX125	88-90	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	SL125 Motosport	71-73	_	_	_	6N6-3B
	SS125A Super Sport	67-69	_	_	_	B54-6
	XL125	74-78	_	_	_	6N4C-1B
	XL125S	79-84	_	_	_	6N4-2A-4
	XL125S	85	_	_	_	*LB2.5L-C
110	CRF110F	13-15	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
	C110	09-10	_	EBZ7-3	_	_
	CT110 Trail	86	_	_	_	6N4-2A-4
	CT110 Trail	80-84	_	_	_	6N4-2A-8(6)
	CB100 Super Sport	70-72	_	_	_	6N6-3B
	CL100, S Scrambler	70-73	_	_	_	6N6-3B
	SL100 Motosport	70-73	_	_	_	6N6-3B
	XL100	77-78	_	_	_	6N4C-1B
	XL100	74-76	_	_	_	6N6-3B
	XL100S	83-85	_	_	_	6N4-2A-4
	XL100S	81-82	_	_	_	6N4C-1B
	XL100S	79-80	_	_	_	6N4-2A-4
90	CA200 Honda (C200 Touring 90)	63-66	_	_	_	6N6-1D-2

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	HONDA					
90	CL90,L 5HP Scrambler	67-70	_	_	_	6N5.5-1D
	CM91 Honda90 (C90M)	66-69	_	_	_	6N6-1B
	CT200 Trail 90	64-66	_	_	_	6N5.5-1D
	CT90 Trail	66-79	_	_	_	6N5.5-1D
	EZ90 Cub	91-96	_	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	_
	S90 Super (CS90)	64-69	_	_	_	6N6-1B
	SL90 Motosport	69	_	_	_	6N5.5-1D
	ST90 Trail Sport	73-75	_	_	_	6N5.5-1D
80	XL80S	83-85	_	_	_	6N4-2A-8(6)
	XL80S	80-82	_	_	_	6N4C-1B
75	XL75	77-79	_		_	6N4C-1B
70	C70 Passport	82-83	_	_	_	*LB5L-B
	C70 Passport	80-81	_	_	_	6N11-2D
	CM70 Honda	70-73	_	_	_	6N11-2D
	CL70 Scrambler	69-73	_	_	_	6N5.5-1D-1
	CT70	91-94	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
	CT70 Trail	80-82	_	_	_	6N4-2A-8(6)
	CT70 Trail	74-79	_	_	_	6N4C-1B
	CT70 Trail, 70H	69-71	_	_	_	6N2A-2C
	CT70, 70H	72-73	_	_	_	6N2A-2C-3
	SL70 Motosport	73	_	_	_	6N2A-2C-3
	SL70 Motosport	71-72	_	_	_	6N2A-2C
	XL70	4-76		_	_	6N4C-1B
65	S65 Sport (CS65)	65-69	_	_	_	6N2-2A
55	C, CA 105T Trail	62-65	_	_	_	6N2-2A
50	C, 100, T, CA100, T,C110, CA110	59-69	_	_	_	6N2-2A
	Mb5	82	_	_	_	*LB2.5L-C
	NA50 Express II	80-81	_	_	_	6N4-2A-8(6)
	NA50 Express II	79	_	_	_	6N2-2A
	NC50 Express	80-83	_	_	_	6N4-2A-8(6)
	NC50 Express	78-79	_	_	_	6N2-2A
	NC50 Express	77	_	_	_	6N2A-2C-3
	NS50F	90	_	_	_	*LB3L-A
	NU50 Urban Express	82-83	_	_	_	*LB2.5L-C-1
	NU50M Urban Express Dlx	82-83	_	_	_	*LB4L-B
	NX50M Express SR	81-82	_	_	_	*LB4L-B
	Zb50	88	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	INDIAN					
1819	Chief Classic Roadmaster Vintage, Chieftain	14-15	MX20-3	_	_	_
1720	Chief Classic, Vintage, Darkhouse	12-13	MX18-3	LT24-3/EB24-3	LTX24HL-BS EBX24HL-BS	_
1638	Chief	02-03	_	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	_
1442	Scout, Spirit	02-03	_	LT20-4 EB20-4	LTX20-BS EBX20-BS	_
	All Models	99-01	_	LT20-4 EB20-4	LTX20-BS EBX20-BS	_
1133	Scout	15	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	KAWASAKI					
2000	VN2000-A Vulcan	04-13	_	_	LTX16-BS EBX16-BS^	_
1700	VN1700 Voyager, Nomad，Vaquero	09-14	_	_	LTX20CH-BS EBX20CH-BS	_

* This battery includes a sensor. + Eliminates need for sensor (needs to be disabled) ^ See Battery supplier Cross Reference ** When ordering this battery, specify sensor.
# The LT20-3/EB20-3 series batteries may be used as an optional upgrade, but some modification to the hold down may be necessary. See battery label for retrofit cautions.

MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	KAWASAK					
1600	VN1600 Vulcan Classic	03-09	_	_	LTX16-BS	_
					EBX16-BS^	
	VN1600 Mean Streak	04-09	_	_	LTX16-BS	_
					EBX16-BS^	
1500	VN1500 Vulcan 88, SE	87-98	MX18-3	LT24-3/EB24-3	LTX24HL-BS	*L50-N18L-A3
					EBX24HL-BS	
	VN1500-C Vulcan L	96-97	MX18-3	LT24-3/EB24-3	LTX24HL-BS	*L50-N18L-A3
					EBX24HL-BS	
	VN1500-G, J, L, R	99-05	_	_	LTX16-BS	_
	Vulcan Nomad,Drifter		_	_	EBX16-BS^	_
	VN1500-D,E,	96-09	_	_	LTX16-BS	_
	N Vulcan Classic		_	_	EBX16-BS^	_
	VN1500 P Vulcan -	02-03	_	_	LTX16-BS	_
	Mean Streak				EBX16-BS^	
1400	Zg1400 Concours	08-14	MX14-4	LT14-4/EB14C-4	LTX14-BS	_
					EBX14-BS	
	ZX14 Ninja	06-14	MX14-4	LT14-4/EB14C-4	LTX14-BS	_
					EBX14-BS	
	Concours 14 ABS	14	_	EBZ14A-4	_	_
1300	KZ1300 Touring	79-82	_	LT24-3	LTX24HL-BS	*L50-N18L-A3
				EB24-3	EBX24HL-BS	
	ZN1300-A Voyager	83-88	_	_	_	12N24-3
1200	ZG1200 Voyager XII	86-03	MX18-3	LT24-3	LTX24HL-BS	*SL50-N18L-AT
				EB24-3	EBX24HL-BS+	
	ZRX1200R	01-05	MX14-4	LT14-4	LTX14-BS	_
				EB14C-4	EBX14-BS	
	ZRX1200 DAEG	09-13	MX12-4	LT12-4	LTX12-BS	_
				EB12-4	EBX12-BS	_
	ZX-12R	00-05	MX14-4	LT14-4	LTX14-BS	_
				EB14C-4	EBX14-BS	
	ZZR1200	02-05	MX14-4	LT14-4	LTX14-BS	_
				EB14C-4	EBX14-BS	
1100	KZ1100-A, LTD	81-83	_	LT20-3	LTX20L-BS	*LB18L-A
				EB20-3#	EBX20L-BS#	
	KZ1100-B GP	82	MX16-3	EB16B-3+	EB16BL-BS+	*LB16L-B**
	KZ1100-B GP	81	MX16-3	EB16B-3	EB16BL-BS	*LB16L-B
	ZN1100-B LTD	84-85	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	ZR1100	92-95	_	_	LTX16-BS	_
					EBX16-BS^	
	ZRX1100	99-00	MX14-4	LT14-4	LTX14-BS	_
				EB14C-4	EBX14-BS	
	ZX1100-A GPZ	83-84	MX16-3	EB16B-3+	EB16BL-BS+	*LB16L-B**
	ZX1100-C Ninja ZX-11	90-93	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	ZX1100-D Ninja	93-94	MX14-4	LT14-4	LTX14-BS	_
	ZX-11 (CN)			EB14C-4	EBX14-BS	
	ZX1100-D Ninja ZX-11	95-01	MX14-4	LT14-4	LTX14-BS	_
				EB14C-4	EBX14-BS	
	ZX1100-E (Gpz1100),	95-97	MX14-4	LT14-4	LTX14-BS	_
	ABS			EB14C-4	EBX14-BS	
1000	Ninja 1000，ABS	14	_	_	EB12A-BS	_
	Ninja 1000	11-13	MX9-4	LT9-4/EB9-4	LTX9-BS	_
					EBX9-BS	
	KZ1000-P Police	02-03	_	LT20-3	LTX20L-BS	_
				EB20-3	EBX20L-BS	
	KZ1000-P Police	05	_	LT20-3	LTX20L-BS	_
				EB20-3	EBX20L-BS	
	KZ1000-P Police	82-01	_	LT20-3	LTX20L-BS	*LB18L-A
				EB20-3#	EBX20L-BS#	

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	KAWASAK					
1000	KZ1000-C Police	80-81	MX16-3	EB16B-3	EB16BL-BS	*LB16L-B
	KZ1000-C Police,Z1-R	78-79	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	KZ1000, LTD	77-80	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	KZ100-E ST, Shaft	79-80	_	EB16B-3	EB16BL-BS	*LB16L-B
	KZ1000-G Classic	80	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	KZ1000, LTD, CSR	81-83	_	LT20-3	LTX20L-BS	*LB18L-A
				EB20-3#	/EB20L-BS#	
	KZ1000-R Replica	82-83	_	LT20-3	LTX20L-BS	*LB18L-A
				EB20-3#	EB20L-BS#	
	Z1000，ABS	14	_	_	EB12A-BS	_
	Z1000	03-13	MX9-4	LT9-4/EB9-4	LTX9-BS/EBX9-BS	
	ZG1000A Concours	86-06	_	LT20-3	LTX20L-BS	*LB18L-A
				EB20-3#	EB20L-BS#	
	ZL1000-A	87	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	ZX10R	11-14	_	EBZ7-3	_	_
	ZX10R，ABS	11-14	_	EBZ10A-4	_	_
	ZX10R	86-90	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	ZX1000-A Ninja	86-90	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	"ZX1000-C Ninja（ZX10-R04"	10	_	LT12B-4/EB12B-4	_	_
	Ninja1000，ABS	14	_	_	EB12A-BS	_
900	KZ900, LTD	76-77	_	_	_	*LB10L-A2
	Vulcan 900 Classic	06-14	MX12-4	LT12-4	LTX12-BS	_
				EB12-4	EBX12-BS	
	Z1 Series	73-75	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	12N14-3A2
	ZL900-A Eliminator	85-86	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	ZX900-A Ninja	84-86	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	"ZX900-B Ninja (ZX-9R)"	94-97	MX12-4	LT12-4	LTX12-BS	_
				EB12-4	EBX12-BS	
	ZX900-C, E, F Ninja	98-03	MX9-4	LT9-4	LTX9-BS	_
	(ZX-9R)			EB9-4	EBX9-BS	
800	VN800-A, B,E Vulcan,	04-06	MX12-4	LT12-4	LTX12-BS	_
	Classic,Drifter			EB12-4	EBX12-BS	
	VN800-A, B,C Vulcan,	95-03	MX14-4	LT14-4	LTX14-BS	_
	Classic, Drifter			EB14C-4	EBX14-BS	
750	H2 Series	72-75	_	_	_	12N5.5-4A
	KZ750, LTD, CSR	76-79	MX15-3	LT14A-3	LTX14AHL-BS	*SLB14L-A2*
				EB14A-3+	EBX14AHL-BS+	
	KZ750-E, H, L LTD	80-83	_	_	_	*LB12A-A
	KZ750-F LTD,Spectre	83	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	KZ750-L Ninja	93	MX9-4	LT9-4	LTX9-BS	_
				EB9-4	EBX9-BS	
	KZ750-R GP	82	_	_	_	*LB12A-A**
	VN750-A Vulcan	86-06	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	Z750 (EU)	09-13	MX9-4	LT9-4	LTX9-BS	_
				EB9-4	EBX9-BS	
	ZN750-A LTD	84-85	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	ZR-7, S	00-05	MX12-4	LT12-4	LTX12-BS	_
				EB12-4	EBX12-BS	

* This battery includes a sensor. + Eliminates need for sensor (needs to be disabled) ** When ordering this battery, specify sensor.
≠G3SS & G3TR models having the engine production #235611 and above, use a 6N4-2A5 battery. ++ Must use existing terminal adaptor.
The LT20-3/EB20-3 series batteries may be used as an optional upgrade, but some modification to the hold down may be necessary. See battery label for retrofit cautions.

MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	KAWASAKI					
750	ZR750	05-06	MX9-4	LT9-4/EB9-4	LTX9-BS	_
					EBX9-BS	
	ZR750-C Zephyr	91-94	MX12-4	LT12-4/EB12-4	LTX12-BS	_
					EBX12-BS	
	ZX750-E Turbo,GPz	83-85	MX15-3	LT14A-3	LTX14AHL-BS	*SLB14L-A2*
				EB14A-3+	EBX14AHL-BS+	
	ZX750-F Ninja	87-90	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	ZX750-H Ninja ZX-7	90		_	_	*LB12AL-A++
	ZX750-H Ninja ZX-7	89	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	ZX750-J Ninja ZX-7	91-95	MX12-4	LT12-4	LTX12-BS	_
				EB12-4	EBX12-BS	
	ZX750 Ninja ZX,7RR	91-97	MX9-4	LT9-4	LTX9-BS	_
				EB9-4	EBX9-BS	
	ZX750-P Ninja ZX-7R	96-03	MX12-4	LT12-4	LTX12-BS	_
				EB12-4	EBX12-BS	
700	KZ700-A	84		_	_	*LB12A-A
	VN700-A Vulcan	85	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	ZN700-A LTD	84-85	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
650	ER6n	09-12	MX12-4	LT12-4/EB12-4		_
	KL650-A, E, KLR,	87-14	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
	KL650-B, Tengai			EB14A-3	EBX14AHL-BS	
	KLE650 Versys	08-14	MX12-4	LT12-4/EB12-4	LTX12-BS	_
					EBX12-BS	
	KLX650C, R	93-96	MX9-4	LT9-4/EB9-4	LTX9-BS	_
					EBX9-BS	
	KZ650SR, LTD, Custom	77-80	_	_	_	*LB10L-A2
	KZ650-H CSR	81-83	_	_	_	*LB12A-A
	Ninja 650R，ABS	12-14		_	EB12A-BS	_
	Ninja 650R	06-11	MX12-4	LT12-4/EB12-4	LTX12-BS	_
					EBX12-BS	
	W Series	66-70	_	_	_	*LB7L-B
						12N7-3B
	W650	00-02	MX14-4	LT14-4	LTX14-BS	_
				EB14C-4	EBX14-BS	
636	ZX636-B Ninja ZX-6R	03-14	MX9-4	LT9-4/EB9-4	LTX9-BS	_
					EBX9-BS	
600	KL600-A KLR	84		_	_	*LB4L-A
	KL600-B KLR	85-86	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	ZL600(All)	86-97		_	_	*LB12A-A
	ZX600-A,B,C,D Ninja	85-96		_	_	*LB12A-A
	ZX600-E,F Ninja ZX-6,6R	93-02	MX12-4	LT12-4/EB12-4	LTX12-BS	_
					EBX12-BS	
	ZX600-FA Ninja ZX-6R	08-13	MX9-4	LT9-4/EB9-4	LTX9-BS	_
					EBX9-BS	
	ZX600-G,J Ninja	98-08	MX9-4	LT9-4/EB9-4	LTX9-BS	_
	ZX-6R/ZZR				EBX9-BS	
	ZX600-K,M Ninja ZX6RR	03-06	MX9-4	LT9-4/EB9-4	LTX9-BS	_
					EBX9-BS	
	ZZR600	05-09	MX9-4	LT9-4/EB9-4	LTX9-BS	_
					EBX9-BS	
	ZZR600	02-04	MX12-4	LT12-4/EB12-4	LTX12-BS	_
					EBX12-BS	
550	KZ550, LTD, GP	80-83	_	_	_	*LB12A-A
	KZ550-F LTD	84	_	_	_	*LB12A-A++
	KZ550-F Spectre	83	_	_	_	*LB12A-A++
	KZ550-H GP	82-83	_	_	_	*LB12A-A**
	ZR550-B Zephyr	90-92	_	_	_	*LB12A-A
	ZX550-A Gpz	84-86	_	_		*LB12A-A**

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	KAWASAKI					
500	EN500-A Vulcan	90-96	_	_	_	*LB12A-A
	EN500-C Vulcan LTD	96-10	_	_	_	*LB12AL-A2
	EX500-A	87-93	MX15-3	"LT14A-3"	_	*LB14L-A2
				EB14A-3		
	EX500-D Ninja 500R	94-10	MX15-3	LT14A-3	LTX14AHL-BS	*LB14L-A2
				EB14A-3	EBX14AHL-BS	
	H1 Series	73-75	_	_	LTX14AHL-BS	*LB9L-B
					EBX14AHL-BS	12N9-3B
	H1 Series	69-72	_	_	_	*LB9-B
						12N9-4B-1
	KH500-A	76	_	_	_	*LB9L-B
						12N9-3B
450	KLX450R	08-10	_	EBZ7-3	_	_
	EN450-A 454 LTD	85-90	_	_	_	*LB12A-A
440	KZ440 (All)	80-83	_	_	_	LB12A-A
400	KH400-A	76-78	_	_	_	12N5.5-4A
	KLX400R,KLX400SR	03-04	_	LT7B-4/EB7B-4	_	_
	KZ400 Deluxe	77-79	_	_	_	*LB12A-A
						12N12A-4A-1
	KZ400-C	78		_		12N5.5-4A
	KZ400-D, H	74-79	_	_	_	*LB12A-A
						12N12A-4A-1
	KZ400-S	75-77	_	_		12N5.5-4A
	S3 Series	74-75	_	_	_	12N5.5-4A
350	A7 Series	66-71	_	_	_	*LB9-B
						12N9-4B-1
	F5 Series	70-71	_	_	_	6N2-2A-3
	F9 Sreies	73-75	_	_	_	6N4B-2A-3
	F9 Sreies	72	_	_	_	6N2-2A-3
	S2 Series	72-73	_	_	_	12N5.5-4A
305	EX305-B GP	83	_	_	_	*LB9L-A1
	KZ305CSR, LTD	81-88	_	_	_	*LB10L-A2
300	EX300,Ninja	13-14	MX9-4	LT9-4	LTX9-BS	_
				EB9-4	EBX9-BS	
250	A1 Series	66-71	_	_	_	12N9-4B-1
						*LB9-B
	EL250, HS	88-93	_	_	_	*LB9L-A1
	EX250, Ninja 250R	08	_	LT7A-4	LTX7A-BS	_
				EB7A-4	EBX7A-BS	
	EX250, Ninja 250R	09-13	MX9-4	LT9-4	LTX9-BS	_
				EB9-4	EBX9-BS	
	EX250 Ninja	95-07	_	LT7-3/EB7-3	LTX7L-BS	_
					EBX7L-BS	
	EX250 Ninja	86-94	_	_	_	*LB9L-A1
	F4 Series	69-70	_	_	_	12N5.5-4A
	F8 Series	71-72	_	_	_	6N2-2A-3
	F11 Series	73-75		_	_	6N4B-2A-3
	KE250-B	77-79	_	_	_	6N6-1D-2
	KH250-A	76	_		_	12N5.5-4A
	KL250 Super Sherpa	00-10	_	LT7-3/EB7-3	LTX7L-BS	_
					EBX7L-BS	
	EX250,KL250	78-84	_	_	_	6N6-1D-2
	KL250-D KLR	85-05	_	_	_	*LB4L-A
	KZ250 CSR, LTD	80-83	_		_	*LB10L-A2
	KLX250S，SF	06-14	_	LT7-3/EB7-3	LTX7L-BS	_
					EBX7L-BS	
	S1 Series	73-75	_	_	_	12N5.5-4A
200	KZ200-A	78-79	_	_	_	*LB10L-B
175	F7 Series	71-75	_	_	_	6N4-2A-5
	KE175-B	76-78	_	_	_	6N6-1D-2
140	KLX140，L	08-14	_	LT7-3/EB7-3	LTX7L-BS	_
					EBX7L-BS	
125	BN125 Eliminator	01-10	_	_	_	*LB9-B

MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
KAWASAKI						
125	F6 Series	71-73	_	_	_	6N4-2A-5
	KE125-A	76-83	_	_	_	6N6-1D-2
	KS125 Series	74-75	_	_	_	6N6-1D-2
120	C2SS RoadRunner	67-69				6N4-2A-3
	C2TR RoadRunner	67-69	_	_	_	6N4-2A-3
100	G3SS Series	75	_	_	_	6N4-2A-5
	G3TR Series	71	_	_	_	6N4-2A-3≠
	G4TR Series	73-75	_	_	_	6N4-2A-5
	G4TR Series	70-72	_	_	_	6N4-2A-3
	G5 Series	74-75	_	_	_	6N4-2A-5
	G5 Series	72-73	_	_	_	6N4-2A-3
	KE100-A	79-81	_	_	_	6N6-1D-2
	KE100-A	76-78				6N4-2A-5
	KE100-B	82-01	_	_	_	6N6-1D-2
	KH100-B	76-77	_	_	_	6N4-2A-5
	KM100-A	79-81	_	_	_	6N6-1D-2
	KM100-A	76-78	_	_	_	6N4-2A-5
	KV100-A	76	_	_	_	6N4-2A-5
90	G3SS Series	73-74	_	_	_	6N4-2A-5
	G3SS Series	69-72	_	_	_	6N4-2A-3≠
	G3TR Series	69-70	_	_	_	6N4-2A-3≠
	MC1 Series	73-75	_	_	_	6N4-2A-5
POLARIS VICTORY						
1731	All Models	08-14	MX20-3	_	_	_
1507	V92C,DC Classic, Deluxe, Cruiser	98-04	_	LT20-3/EB20-3	LTX12-BS EBX12-BS	_
	V92SC Sport Cruiser	00-01	_	LT20-3/EB20-3	LTX9-BS EBX9-BS	_
	V92TC Touring Cruiser	02-06	_	LT20-3/EB20-3	LTX14AHL-BS EBX14AHL-BS	_
	Vegas,Kingpin 8-ball, Hammer	03-05	_	LT20-3/EB20-3	LTX12-BS EBX12-BS	_
SUZUKI						
1800	VZR1800 (M109R)	06-14	_	_	LTX20CH-BS EBX20CH-BS	_
	VLR1800 (C109R)	08-12	_	_	LTX20CH-BS EBX20CH-BS	_
1600	Marauder,Boulevard M95	04-05	_	_	LTX16-BS EBX16-BS^	_
1500	VL1500 Intruder	98-11	_	_	LTX16-BS-1	_
	Boulevard C90，T	98-11	_	_	LTX16-BS-1	_
	GV1400GC,D,T	86-88	MX18-3	LT24-3/EB24-3+	LTX24HL-BS	*SL50-N18L-AT*
	VZ1500 Boulevard	14	_	_	LTX20CH-BS EBX20CH-BS	_
	VZ1500 Boulevard	09-13	_	_	LTX20CH-BS EBX20CH-BS	_
1400	M90	09-13	_	_	LTX20CH-BS EBX20CH-BS	_
	GV1400GC,D	86-88	MX18-3	LT24-3/EB24-3	LTX24HL-BS EBX24HL-BS+	*SL50-N18L-AT
	T Cavalcade	86-88	MX18-3	LT24-3/EB24-3	LTX24HL-BS EBX24HL-BS+	*SL50-N18L-AT
	VS 1400GL Intruder	87-11	_	_	LTX16-BS-1	_
	GLP ,S83	87-11	_	_	LTX16-BS-1	_
1300	GSX1300BK B-King	08-11	MX12-4	LT12-4/EB12-4	LTX12-BS EBX12-BS	_
	GSX1300R,Z Hayabusa	08-14	MX12-4	LT12-4/EB12-4	LTX12-BS EBX12-BS	_
	GSX1300R Hayabusa	99-07	_	_	EB12A-BS	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
SUZUKI						
1250	GSF1250F, A Bandit	07-13	_	_	EB12A-BS	_
1200	GSF1200, S Bandit	97-05	MX12-4	LT12-4/EB12-4	LTX12-BS EBX12-BS	_
	GV1200GL Madura	85-86	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-B2
1150	GS1150E, S	83-86	MX15-3	LT14A-3 EB14A-3+	LTX14AHL-BS EBX14AHL-BS+	*SLB14L-B2*
1100	GS1100E, S	80-83	MX15-3	LT14A-3 EB14A-3+	LTX14AHL-BS EBX14AHL-BS+	*SLB14L-A2*
	GS1100G, K, L,Katana	82-84	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	GSX-R1100	86-92	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	GSX-R1100	93-98	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	GSX1100F Katana	88-93	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-B2
	GSX1100G	91-93	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
1000	DL1000 V-Strom	02-14	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	GS1000	78-82	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	GSX-R1000	01-04	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	GSX-R1000	05-14	_	_	EB12A-BS	_
	SV1000,S	03-07	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	TL1000R	98-03	_	_	EB12A-BS	_
	TL1000S	97-01	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
900	RF900, R, S, ZS	94-97	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
850	GS850G,GL	79-83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
800	VL800 Intruder, Volusia Boulevard，C50,T, M50	01-14	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	VS800 GL,S Intruder,S50	92-09	_	_	_	*LB16B-A1
	VX800	90-93	_	_	_	*LB16B-A
	VZ800 Marauder	97-08	MX12-4	LT12-4/EB12-4	LTX12-BS EBX12-BS	_
750	GS750, Katana	77-83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	GSX750F Katana	98-06	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	GSX750F Katana	89-97	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-B2
	GSX-R750	00-14		_	EB12A-BS	_
	GSX-R750	96-99	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	GSX-R750	86-92	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	GSX-R750W	93-95	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	GT750 LeMans	72-77	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	VS750GLP Intuder	88-91	_	_	_	*LB16B-A1
700	GS700E, GS700ES	85	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	* LB14L-A2

MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
SUZUKI						
700	GV700GL Madura	85	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-B2
	VS700GL Intruder	85-87	_	_	_	*LB16B-A1
650	DL650 V-Strom	04-13	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	DL650 V-Strom, Adventure	04-13	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	DR650S ER, ES	94-95	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	R650S, N, P	92-93	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	DR650S	90-91	_	_	_	*LB5L-B 12N5-3B
	DR650SE	98-14	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	DR650SE(CN)	96-97	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	DR650SE	96-97	_	_	_	*LB10L-B2
	GR650 Tempter, X	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	GSX650F	08-11	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	GS650E	81-82	_	_	_	*LB10L-A2
	CS650 (All)	81-83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	LS650 Savage, S40	86-14	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-B2
	SV650	99-02	_	_	EB12A-BS	_
	SV650,A,SA	03-11	MX12-4	LT12-4/EB12-4	LTX12-BS EBX12-BS	_
	SV650,S	03-13	MX12-4	LT12-4/EB12-4	LTX12-BS EBX12-BS	_
	SFV650 Gladius	09-14	_	_	EB12A-BS	_
	XN85 Turbo	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
620	QUV620F	05	_	LT20-3/EB20-3	LTX20L-BS EBX20L-BS	_
600	GSF600S Bandit	96-03	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	GSX-R600	97-14	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	GSX-R600W	92-93	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	GSX600F Katana	98-06	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	GSX600F Katana	88-97	_	_	_	*LB10L-B2
	SP600	85	_	_	_	*LB5L-B 12N5-3B
	RF600R, S	94-96	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
550	GS550E, L, M, TX	77-82	_	_	_	*LB10L-A2
	GS550E, ES, L	83-86	_	_	_	*LB10L-B
	GT550 Indy	72-77	_	_	_	_
500	GS500, F	01-09	_	_	_	*LB10L-B2
	GS500E	89-00	_	_	_	*LB10L-B2
	GT500 Titan	76-77	_	_	_	*LB7-A 12N7-4A
	SP500	81-83	_	_	_	6N4B-2A
	T500 Titan	68-75	_	_	_	*LB7-A 12N7-4A
450	GS450	83-88	_	_	_	*LB12B-B2
	Gs450	80-82	_	_	_	*LB10L-A2

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
SUZUKI						
425	GS425, GS425E, L	79	_	_	_	*LB10L-A2
400	DR-Z400, E, S	00-14	_	LT7B-4/EB7B-4	_	_
	GN400T, X	80-82	_	_	_	6N4B-2A
	GS400	77-78	_		_	*LB10L-A2
	GS400X	77-78	_	_	_	*LB7-A 12N7-4A
	GSF400 Bandit	91-93	MX9-4	LT9-4/EB7B-4	LTX9-BS EBX9-BS	_
	SP400	80	_	_	_	6N4B-2A
	TS400 Apache	76-77	_	_	_	6N4B-2A
	TS400 Apache	72-75	_	_	_	*LB5L-B 12N5-3B
380	GT380 Sebring	72-77	_	_	_	*LB7-A 12N7-4A
370	SP370	78-79	_	_	_	6N4B-2A
350	DR350S	90-96		LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
	DR350SE	94-99	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	T350 Series	79	_	_	_	*LB5L-B 12N5-3B
305	Scramble TC305	69	_	_	_	*LB5L-B 12N5-3B
	T305	69	_	_	_	*LB5L-B 12N5-3B
300	GS300L	82-85	_	_	_	*LB12B-B2
250	DR250S	90-92	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
	DR250S EP, ER, ES	93-95	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	DR-Z250	01-07	_	EBZ7-3	_	_
	GN250	82-88	_	_	_	*LB10L-A2
	GS250T	80-81	_	_	_	*LB10L-A2
	GT250 Hustler	73-77	_	_	_	*LB5L-B 12N5-3B
	GW250	13-14	MX9-4	LT9-4/EB7B-4	LTX9-BS EBX9-BS	_
	GZ250	99-12	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	Model T20	69	_	_	_	*LB5L-B 12N5-3B
	SP250	82-85	_	_	_	6N4B-2A
	Scrambler TC250	69	_	_	_	*LB5L-B 12N5-3B
	T250, T250II, T250J, T250R	72	_	_	_	*LB5L-B 12N5-3B
	TS250 Savage	73-81	_	_	_	6N4B-2A
	TS250 Savage	69-72	_	_	_	6N2-2A-4
	TU250X	09-15	_	_	_	
200	DR200SE	96-13	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	SP200	86-88	_	_	_	*LB4L-B
	T200, TC200		_	_	_	*LB5L-B 12N5-3B
185	GT185 Adventurer	73-77	_	_	_	12N11-3A-1
	TC185 Ranger	74-77	_	_	_	12N11-3A-1
	TS185 Sierra	77-81	_	_	_	6N4B-2A
	TS185 Sierra	71-76	_	_	_	6N4-2A
125	DR125, SE, SES	94-96	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	GN125, E	91-96	_	_	_	*LB7-A
	GN125, E	82-83	_	_	_	*LB7-A

MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory A ctivated Mainten ance Free	Dry Charged Maintenance Free	Flooded
SUZUKI						
125	RV125 SE, R	94	_	LT7-3/EB7-3	LTX7L-BS EBX7L-BS	_
	RV125 Tracker	73-77	_	_	_	6N4-2A
	SP125	86-88	_	_	_	6N4-2A
	SP125	82-83	_	_	_	6N4B-2A
	TC125 Prospector	73-77	_	_	_	6N4B-2A
	TS125 Duster	71-81	_	_	_	6N4B-2A
120	B120P		_	_	_	6N4-2A
	TC120,TC120II,TC120R	71	_	_	_	6N4B-2A
105	B105P		_	_	_	6N4-2A
100	A100 Go-fer	76-77	_	_	_	6N4-2A
	A100 Go-fer	69	_	_	_	6N4-2A
	B100P		_	_	_	6N4-2A
	SP100	83	_	_	_	6N4B-2A
	Scrambler AC100	69	_	_	_	6N4-2A
	Sport AS100	69	_	_	_	6N4-2A
	TC100 Blazer	73-77	_	_	_	6N4-2A
	TS100 Honcho	78-81	_	_	_	6N4B-2A
	TS100 Honcho	73-77	_	_	_	6N4-2A
90	RV90 Rover	73-77	_	_	_	6N4B-2A
	TC90		_	_	_	6N4-2A
	RV90 Rover	72	_	_	_	6N2-2A-4
	TC90J, TC90R		_	_	_	6N2-2A-4
	Model K10,Model K10P	68	_	_	_	6N4-2A
80	Sport 80 (ModelsK11&K11P)	68	_	_	_	6N4-2A
	Trail 80 (ModelsK15&K15P)	68	_	_	_	6N4-2A
75	TS75 Colt	75-77	_	_	_	6N4-2A
70	DR-Z70	08-09	_	LT4B-BS	_	_
55	Model 31	68	_	_	_	6N2-2A-4
50	AC50, AS50	71	_	_	_	6N4-2A
	OR50	79-80	_	_	_	6N4B-2A
	Sport 50 (Model M12)	68	_	_	_	6N4-2A
	TS50J, TS50K	74	_	_	_	6N4-2A
	TS50L, TS50R	74	_	_	_	6N4-2A
YAMAHA						
1854	Roadliner, Stratoliner	06-14	MX16-4	LT14B-4 EB14B-4	_	_
	Raider	08-15	MX16-4	LT14B-4 EB14B-4	_	_
1700	VMAX	09-15	_	EBZ14A-4	_	_
	XV1700 Road Star - Warrior	04-09	_	LT14B-4 EB14B-4	_	_
	XV1700A Road Star, Silverado	08-14	_	LT20-3/EB20-3	LTX20L-BS EBX20L-BS	_
	MT-01 (EU)	05-12	_	LT20-3/EB20-3	LTX20L-BS EBX20L-BS	_
1600	XV1600 Road Star (All)	99-03	_	LT20-3/EB20-3	LTX20L-BS EBX20L-BS	_
1300	FJR1300 , A	03-15	_	LT14B-4 EB14B-4	_	_
	XVZ13 Royal Star Venture (All)	96-12	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	XVZ13 Venture	86-93	MX18-3	LT24-3/EB24-3+	LTX24HL-BS	*SL50-N18L-AT*
	Royal		_	_	EBX24HL-BS+	_
	XJR1300 (EU)	07-13	_	EBZ14A-4	_	_

CC	Model	Year	MX	Factory A ctivated Mainten ance Free	Dry Charged Maintenance Free	Flooded
YAMAHA						
1300	XVS13AY V-Start, Stryker	09-15	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
1200	XT1200Z Super Tenere	11-14	_	EBZ12A-4	_	_
	Fj1200 (All)	91-93	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	FJ1200	86-90	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	VMX12 V-Max	85-07	_	_	_	*LB16AL-A2
	XVZ12 Venture	83-85	MX18-3	LT24-3/EB24-3+	LTX24HL-BS EBX24HL-BS+	*SL50-N18L-AT*
1100	Royale		_	_	_	_
	FJ1100	84-85	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	XJ1100 Maxim	82	MX18-3	LT24-3 EB24-3+	LTX24HL-BS EBX24HL-BS+	*SL50-N18L-AT*
	XS1100 (All)	78-81	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	*L50-N18L-A3
	XV1100 Virago (All)	86-99	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	*L50-N18L-A3
1000	XVS1100 V-Star (All)	99-10	_	LT14B-4/EB14B-4	_	_
	FZR1000	91-95	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	FZR1000	87-90	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	FZS1000 FZ1	01-05	_	_	EB14B-BS	_
	FZS1000 FZ1	06-14	_	EBZ14A-4	_	_
	GTS1000	93-94	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	XV1000 Virago	84-85	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	*L50-N18L-A3
	YZF-R1	99-03	_	LT12B-4/EB12B-4	_	*L50-N18L-A2
	YZF-R1	04-14	_	EBZ10A-4	_	_
950	YZF1000R	97-98	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	XV95CT,Y V-Star	09-15	_	EBZ14A-4	_	_
920	Bolt，R-SPEC	14-15	_	EBZ14A-4	_	_
	XV920 Virago	82	MX18-3	LT24-3/EB24-3+	LTX24HL-BS EBX24HL-BS+	*SL50-N18L-AT*
	XV920M Midnight -Virago	83	MX18-3	LT24-3/EB24-3	LTX18L-BS EBX18L-BS	*L50-N18L-A2
900	XV920R Virago	81-83	MX18-3	LT24-3/EB24-3	LTX18L-BS EBX18L-BS	*L50-N18L-A2
	TDM900（EU）	02-13	_	LT12B-4/EB12B-4	_	*L50-N18L-A2
850	XJ900R Seca	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	FZ-09	14-15	_	EBZ10A-4	_	_
	TDM850	92-93	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	TRX850	95-99	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
800	XS850 (All)	80-81	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
750	FZ8	11-13	_	EBZ10A-4	_	_
	FZ750	85-88	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	FZR750	87-88	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Tx750	73-74	_	EB16B-3	EB16BL-BS	*LB16L-B

* This battery includes a sensor. + Eliminates need for sensor (needs to be disabled)

MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
YAMAHA						
750	XJ750 Maxim	82-83	MX15-3	LT14A-3 EB14A-3+	LTX14AHL-BS EBX14AHL-BS+	*SLB14L-A2*
	XJ750M Midnight-Maxim	83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	XJ750R Seca	81-83	MX15-3	LT14A-3 EB14A-3+	LTX14AHL-BS EBX14AHL-BS+	*SLB14L-A2*
	XS750 (All)	77-79	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
	XV750 Virago (All)	81-96	_	_	_	*LB16AL-A2
	YZF750R	94-98	MX12-4	LT12-4/ EB12-4	LTX12-BS EBX12-BS	_
	YZF-R7	99	_	LT9B-4/EB9B-4	_	_
700	FZ700	87	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	FZX700 Fazer	86-87	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	XJ700 Maxim	85-86	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	XJ700X	85	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	XV700 Virago	84-87	_	_	_	*LB16AL-A2
660	XT660X,R,Z Tenere (EU)	04-13	_	LT9B-4/EB9B-4	_	_
	MT-03 (EU）	06-13	_	LT9B-4/EB9B-4	_	_
650	TX650	74	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
	TX650	73	_	_	_	*LB12A-A 12N12A-4A-1
	XJ650 (All)	80-83	_	_	_	*LB12A-A 12N12A-4A-1
	XS1	70-71	_		_	12N5.5-3B
	XS2	72	_	_	_	*LB12A-A 12N12A-4A-1
	XS650	75-83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	* LB14L-A2 12N14-3A2
	XVS650 V-Star (All)	98-15	_	LT12B-4 EB12B-4	_	_
600	FJ600	84-85	_	_	_	*LB12A-A 12N12A-4A-1
	FZ6，R	05-14	_	LT12B-4 EB12B-4	_	_
	FZ600	86-88	_	_	_	*LB12A-A 12N12A-4A-1
	FZR600/R	89-99	_	_	_	*LB12AL-A2
	SRX600	86	_	_	_	*LB5L-B 12N5-3B
	XJ600S Seca II	92-98	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	XJ6，Deversion (EU)	09-13	_	LT12B-4 EB12B-4	_	_
	XT600	84-89	_	_	_	*LB5L-B
	XT600E	90-95	MX9-4	LT9-4/EB9-4	LTX9-BS EBX9-BS	_
	YX600Radian	86-90	_	_	_	*LB12A-A 12N12A-4A-1
	YZF-R6, R6S	01-07	_	LT9B-4/EB9B-4	_	_
	YZF-R6 (Excl. R6S)	06-15	_	EBZ10A-4	_	_
	YZF-R6	99-00	_	LT12B-4 EB12B-4	_	_
	YZF600R	95-07	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_ _

CC	Model	Year	MX	Factory A ctivated Mainte nance Free	Dry Charged Maintenance Free	Flooded
YAMAHA						
550	XJ Maxim, R Seca	81-83	_	_	_	*LB12A-A 12N12A-4A-1
	XT550	82-83	_	_	_	*LB5L-B 12N5-3B
	XZ550R Vision	82-83	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
535	XV535 Virago	87-99	_	_	_	*LB12AL-A2
500	SR500	78-81	_	_	_	*LB7L-B 12N7-3B
	TX500	73-74	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
	XS500	75-78	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
	XT500	76-81	_	_	_	6N6-3B-1
	XVS500 Virago	83	_	_	_	*LB12A-A 12N12A-4A-1
450	WR450F	03-15		EBZ7-3	_	_
400	DT400 Enduro	77-78	_	_	_	6N6-3B-1
	DT400 Enduro	75-76	_	_	_	6N4B-2A-3
	FZR400 (All)	88-90	_	_	_	*LB12AL-A2
	SR400	78-00	_	_	_	*LB7L-B
	SR400	01-15		_	LT4B-BS	_
	SR400(FI）	10-13		_	LT4B-BS	_
	RD400	76-79	_	_	_	12N5.5A-3B
	XS400 (All)	80-83	_	_	_	*LB12A-A 12N12A-4A-1
360	DT360 Enduro	74	_	_	_	6N4B-2A-3
	RT1, RT1B 360 Enduro	70-71	_	_	_	6N2-2A-3
	RT2,RT3 360 Enduro	72-73	_	_	_	6N4-2A-5
	XS360	76-78	_	_	_	*LB12A-A 12N12A-4A-1
	XS360-2	77	_	_	_	*LB7L-B 12N7-3B
350	BW350 Big Wheel	87-88	_	_	_	*LB12B-B2
	R3	69	_	_	_	*LB5L-B 12N5-3B
	R5, R5B, R5C	70-72	_	_	_	12N5.5A-3B
	RD350	73-75	_	_	_	12N5.5A-3B
	RZ350	84-85	_	_	_	12N5.5-3B
	XT350	85-08	_	_	_	*LB3L-B
	YR2/C	68	_	_	_	12N5.5-3B
250	DS6B, DS6C	69-70	_	_	_	*LB5L-B 12N5-3B
	DS7	72	_	_	_	12N5.5A-3B
	DT1 250 Enduro	68	_	_	_	6N2-2A-3
	DT1B,DT1C, DT1E 250 Enduro	69-71	_	_	_	6N2-2A-3
	DT2 250 Enduro	72	_	_	_	6N4-2A-5
	DT250 Enduro	77-79	_	_	_	6N6-3B-1
	DT250 Enduro	74-76	_	_	_	6N4B-2A-3
	DT3 250 Enduro	73	_	_	_	6N4-2A-5
	RD250	73-75	_	_	_	12N5.5A-3B
	SR250 Exciter	80-82	_	_	_	*LB12A-A 12N12A-4A-1
	SRX250	87	_	_	_	*LB12A-A 12N12A-4A-1
	TTR250	99-06	_	_	LT7B-4 EB7B-4	_
	WR250F	03-09	_	LTX5L-BS EBX5L-BS	LT5-3 EB5-3	_

MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
YAMAHA						
250	WR250X,R	08-15	_	EBZ7-3	_	_
	XT250	08-15	_	EBZ7-3	_	_
	XT250	84	_	_	_	*LB3L-B
	XT250	80-83	_	_	_	6N6-3B-1
	XT250 Serow	05-13	_	EBZ7-3	LTX7L-BS	_
	XV250 Virago	95-03	_	_	_	*LB10L-A2
	XV250 Route 66	88-90	_	_	_	*LB10L-A2
	XV250YCR V-Star	09-15	_	_	_	*LB10L-A2
	Tricker	-13	_	EBZ7-3	_	_
230	TTR230E	06-15	_	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	_
225	TTR225	99-05	_	LT7B-4/EB7B-4	_	_
	XT225	01-07	_	EBZ7-3	_	_
	XT225 Serow	92-00	_	LT7-3/EB7-3	EBX7L-BS	_
200	BW200E BigWheel (Elec.Start)	86-88	_	_	_	*LB7C-A
	CS3B, CS3C	70-71	_	_	_	*LB9L-A1 12N9-3A-1
	CS5	72	_	_	_	*LB9L-A1 12N9-3A-1
	RD200	74-76	_	_	_	*LB9L-A1 12N9-3A-1
	TW200 Trailway	87-09	_	_	_	*LB7C-A
	XT200	82-83	_	_	_	6N4A-4D
	YCS1	68	_	_	_	*LB9L-A1 12N9-3A-1
185	SR185 Exciter	81-82				*LB7L-B
175	CT1,CT1B,	69-71	_	_	_	6N2-2A-3
	CT1C 175 Enduro					6N4A-4D
	CT2, CT3 175 Enduro	72-73	_	_	_	
	DT175 Enduro	78-81	_	_	_	6N6-3B-1
	DT175 Enduro	74-76	_	_	_	6N4B-2A-3
125	AS2C	69				12N5.5-3B
	AT1E, AT1B,	69-71	_	_	_	*LB7L-B 12N7-3B
	AT1C 125 Enduro		_	_	_	
	AT2, AT3 125 Enduro	72-73	_	_	_	*LB7L-B 12N7-3B
	DT125 Enduro	78-81	_	_	_	*LB7L-B 12N7-3B

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
YAMAHA						
125	Rd125	75-76	_	_	EBX4-BS	12N5.5A-3B
	DT125 Enduro	74-76	_	LT4-3/EB4-3	LTX4L-BS	*LB7L-B 12N7-3B
	TTR125E/LE (Elec.)	03-15	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
	XT125	82-83	_	_	_	6N4A-4D
	YAS1/C	68	_	_	_	12N5.5-3B
110	TTR125E/LE (Elec.)	08-15		_	LT4B-BS	_
100	DT100 Enduro	77-83	_	_	_	6N4-2A-5
	DT100 Enduro	74-76	_	_	_	6N4B-2A-3
	L5T, L5TA	69-70	_	_	_	*LB7L-B 12N7-3B
	LS2	72				12N5.5A-3B
	LT2, LT3 100 Enduro	72	_	_	_	6N4A-4D
	Rs100	75-76	_	_	_ _	6N4A-4D
	YL2C/CM	68	_	_	LT4B-BS	*LB7L-B 12N7-3B
90	HS1, HS1B	70-71	_	_		12N5.5-3B
	HT1, HT1B 90 Enduro	70-71	_	_	LT4B-BS	6N2-2A-3
	"TTR90E (Elec.Start)"	03-07	_	_	_	_
80	DT80 Mini Enduro	81-83	_	_	_	6N4-2A-5
	G65, G65B	70-71	_	_	_	6N4A-4D
	G7S	72	_	_	_	6N4A-4D
	GT1 Mini Enduro	73	_	_	_	6N4-2A-5
	GT80 Mini Enduro	74-80	_	_	_	6N4-2A-5
	LB80 Chappy	76-78	_	_	_	6N4-2A-5
	Yg1	62-66	_	_	_	6N4A-4D
	YG5T, YG55	68-69	_	_	_	*LB7L-B 12N7-3B
60	JT2 Mini Enduro	72	_	_	_	6N2-2A-3
	RD60	73-75	_	_	_	6N4A-4D
50	DT50 Enduro	88-90	_	_	_	6N4B-2A-3
	LB50P Chappy	78-82	_	_	_	6N4-2A-5
	LC50 Champ	80-81	_	_	_	6N4-2A-5
	MJ50 Towny	82	_	_	_	6N4-2A-5
	QT50 Yamahopper	79-87	_	_	_	6N4-2A-5
	RX50 Special	83-84	_	_	LT4B-BS	6N4-2A-5
	TTR50E	06-15	_	_	_	_
	YSR50	87-92	_	_		6N4-2A-5

ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
ARCTIC CAT						
700	TRV700	-09	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
650	650H1, TBX650	05-12	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	4x4 Automatic	04-06	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
500	All Models	All	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
400	TRV400	-10	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	DVX400	All	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	All Other Models	All	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
366	366	08-12	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
300	DVX300	09-14	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
ARCTIC CAT						
300	All Models	-09	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
250	250	-10	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	All Models	-05	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	DVX250, 2X4	06	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
150	150	-13	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
90	All Models	-06	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	DVX90	06-14	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	90,90 Utility	-14	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
50	DVX50	06-10	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_

"*" + "Type": High performance flooded battery, for example, *LB3L-B

ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
SUZUKI						
750	LT-A750X, King Quad	07-14	_	_	LTX20CH-BS EBX20CH-BS	_
700	LT-A700X, King Quad	05-07	_	_	LTX20CH-BS EBX20CH-BS	_
	LT-V700F, Twin Peaks	04-05	_	_	LTX20CH-BS EBX20CH-BS	_
500	LT-A500 King Quad	06-14	_	_	LTX20CH-BS EBX20CH-BS	_
	LT-A500F, Vinson 4WD	04-07	_	_	LTX20CH-BS EBX20CH-BS	_
	LT-A500F, Vinson 4WD	02-03	_	_	LTX16-BS EBX16-BS^	_
	LT-A500F, Quad Master	00-01	_	_	LTX16-BS-1	_
	LT-A500F, Quad Runner	98-02	_	_	LTX16-BS-1	_
	LT-F500F Vinson, Manual 4WD	04-07	_	_	LTX20CH-BS EBX20CH-BS	_
	LT-F500F Vinson, Manual 4WD	03	_	_	LTX16-BS EBX16-BS^	_
450	LT-A450X, King Quad	07-11	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	LT-R450 QuadRacer	06-11	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
400	LT-A400 Eiger 2WD, F Eiger 4WD	02-07	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	LT-A400F KingQuad	-09	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	LT-A400F KingQuad	13-14	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	LT-F400 Eiger 2WD, F Eiger 4WD	02-07	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	LT-Z400 Quad Sport	13-14	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	LT-A400 King Quad	-13	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
300	LT-Z400 QuadSport	03-14	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	LT300E Quad Runner, 300E	87-89	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	LT-F300F KingQuad	99-02	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	LT-F300F King Quad, (CN,Opt)	99-02	_	_	LTX24H-BS EBX24H-BS	*L50-N18A-A
280	LT-F4WDX, KingQuad	91-99	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	LT-F4WDX, King Quad (CN,Opt)	91-99	_	_	LTX24H-BS EBX24H-BS	*L50-N18A-A
250	LT-4WD, QuadRunner	87-99	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	LT-4WD, Quad Runner (Opt)	87-99	_	_	LTX24H-BS EBX24H-BS	*L50-N18A-A
	LT-F250 QuadRunner	88-01	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	LT-F250 Quad Runner, (Opt)	88-01	_	_	LTX24H-BS EBX24H-BS	*L50-N18A-A
	LT-F250, F Ozark	02-14	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	LT-F250F QuadRunner	99-02	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	LT-F250F Quad Runner (CN, Opt)	99-02	_	_	LTX24H-BS EBX24H-BS	*L50-N18A-A

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
SUZUKI						
250	LT-Z250 QuadSport	04-09	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	LT250EFQuadRunner	85-86	_	_	LTX24H-BS EBX24H-BS	*L50-N18A-A
230	LT-F230 QuadRunner	86-87	_	_	_	*LB10A-A2
	LT230E QuadRunner	88-93	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	LT230GE QuadRunner	85-86	_	_	_	*LB10A-A2
160	LT-F160 QuadRunner	91-01	_	_	_	*LB9A-A
	LT-F160 QuadRunner	03-04	_	_	_	*LB9A-A
	LT160E QuadRunner	89-94	_	_	_	*LB9A-A
90	LTZ90 QuadSport	07-09	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
80	LT80 QuadSport 80	87-06	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
50	QuadSport Z50	06-09	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
QIAN JIANG						
100	ATV100		_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
50	ATV50		_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
HONDA						
700	TRX700XX	08-13	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
680	TRX680 FourTrax Rincon	06-14	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
650	TRX650 FourTrax Rincon (Std)	03-05	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	(Optional Cold Starting)	03-04	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
500	TRX500FE,FPE,FM,FPM	11-14	MX14-4	_	_	_
	TRX500F FourTrax, Rubicon	01-11	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	TRX500FE, FM, TM, Four Trax Foreman, ES, 4x4	05-11	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
450	TRX450ER,TRX45ER	06-13	_	EBZ7-3	_	_
	TRX450, FourTrax, Foreman S, ES	98-04	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	TRX450ER	06-09	_	EBZ7-3	_	_
420	TRX420 Rancher 4x4	-13	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	
	TRX420 Rancher 4x4	14-15	MX14-4	_	_	_
	TRX420 Rancher 2x4	-14	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
400	FL400R Pilot	89-90	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	TRX400EX,,FourTrax, Sportrax	99-13	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	TRX400 Rancher AT, TRX400FW	04-06	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	Foreman	95-03	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
350	FL350R Odyssey	85	_	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	TRX350, D FourTrax 4x4	86-89	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	TRX350 Rancher	00-06	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_

^ See Battery supplier Cross Reference

ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
HONDA						
300	TRX300 FourTrax 300	88-00	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	TRX300EX,Sportrax	93-12	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	TRX300FW, FourTrax 300 4x4	88-00	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
250	ATC250ES Big Red	85-87	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	ATC250SX	85-87	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	TRX250 FourTrax	85-87	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	TRX250 FourTrax, Recon,ES	97-09	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	TRX250EX,TE,TM	01-13	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
200	ATC200 Big Red	82-84	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	ATC200M	84-85	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	TRX200 FourTrax	90-97	_	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	TRX200 FourTrax	84	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	TRX200SX FourTrax	86-88	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
125	ATC125M	86-87	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	ATC125M	84-85	_	_	_	*LB9A-A
	TRX125 FourTrax	87-88	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	TRX125 FourTrax	85-86	_	_	_	*LB9A-A
90	TRX90EX	06-15	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
JOHN DEERE						
	All Models	All		LT16C-3	LT16CL-BS	*LB16CL-B
KASEA						
250	Skyhawk 250	All	_	LT7A-4/EB7A-4	*LTX7A-BS"	_
170	Skyhawk 170	All	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
150	Skyhawk 150, Adventure Buggy	All	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
125	KS,KU Models, Adventure Buggy	All	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
90	Skyhawk 90	All	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
65	KS,KU Models	All	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
	KS,KU Models	All	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
50	Mini Skyhawk	All	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	Skyhawk 50	All	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
KAWASAKI						
750	KVF750-A, B Brute,Force 750 4x4	05-14		LT14-4/EB14C-4	_	_
700	KFX700 V-Force	03-10	_	LT14-4/EB14C-4	_	_
	KSV700-A,B (KFX700)	04-08	_	LT14-4/EB14C-4	_	_
	KSV700-A,B Prarie 700 4x4	04-06	_	LT14-4 EB14C-4	_	_
	KVF700-A, B,D Prarie 700, 4x4	04-06	_	LT14-4/EB14C-4	_	_
650	KVF650 Brute Force	02-13	_	LT14-4/EB14C-4	_	_
	KV650-A,B,D,E Prarie 650, 4x4	02-11	_	LT14-4 /EB14C-4	_	_
450	KFX450R	08-14	_	LT7-3 EB7-3	LTX7L-BS EBX7L-BS	_
400	KLF400-B Bayou 400 4x4	93-00		LT16C-3	LT16CL-BS	*LB16CL-B
	KSF400-A (KFX400)	03-06	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	KVF400-A Prarie 4x4	97-00	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KVF400-A ,Prairie 400 4x4(CN)	97-00	_	LT16C-3	LT16CL-BS	*LB16CL-B
	KVF400-B ,Prairie 400 4x4	98-00	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KVF400-B ,Prairie 400 4x4(CN)	98-00	_	LT16C-3	LT16CL-BS	*LB16CL-B
	KVF400-C,Prairie 400, 4x4	99-02	_	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KVF400-C,Prairie 400 4x4(CN)	99-02	_	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	KVF400-D,Prairie 400, 4x4	99-02	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KVF400-D,Prairie 400 4x4(CN)	99-01	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
360	KVF360 Prairie	-13	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KVF360-A,B,C Prarie 360, 4x4	03-11	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
300	KEF300-A Lakota	95-00	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KEF300-B,Lakota Sport	01-03	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KLF300-A Bayou	86-87	_	LT16C-3	LT16CL-BS	*LB16CL-B
	KLF300-B Bayou	88-04	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KLF300-B ,Bayou (CN)	92-99	_	LT16C-3	LT16CL-BS	*LB16CL-B
	KLF300-C,Bayou 300 4x4	89-04	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KLF300-C,Bayou 300 4x4(CN)	92-05	_	LT16C-3	LT16CL-BS	*LB16CL-B
	KVF300 Brute Force	13-14	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	KVF300-A,Prairie 300, 4x4	99-02	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KVF300-A,Prairie 300,4x4(CN)	99-01	_	LT16C-3	LT16CL-BS	*LB16CL-B
	KVF300-B,Prairie 300, 4x4	99-02	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KVF300-B,Prairie 300,4x4(CN)	99-02	_	LT16C-3	LT16CL-BS	*LB16CL-B
250	KLF250-A Bayou	03-12	_	_	_	*LB10A-A2
	KLF250-A,Bayou (CN)	03-05	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	KLT250-A	82-83	_	_	_	*LB12A-A
	KLT250-C Prairie	84-85	_	_	_	*LB10L-B
	KLT250-C Prairie	83	_	_	_	*LB12A-A
220	KLF220-A Bayou	88-02	_	_	_	*LB10A-A2
	KLF220-A,Bayou (CN)	92-02	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2

* Must use adaptor kit available from Buell. "*" + "Type" : High performance flooded battery, for example, *LB16-B

ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
KAWASAKI						
200	KLT200-A, C	81-84	_	_	_	*LB10L-B
	KLT200-B, C	83	_	_	_	*LB12A-A
185	KLF185-A Bayou	85-88	_	_	_	*LB10L-B
110	KLF110-B,Mojove (Elec.Start)	87-88	_	_	_	*LB9L-A1
90	KFX90	07-14	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
80	KSF80-A (KFX80)	03-05	_	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	_
50	KFX50	07-14	_	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	_
E-TON						
250	Vector250	-13	_	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
150	Viper 150R	-13	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	CXL 150 Yukon II	00-13	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	YXL150 Yukon	00-01	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
90	AXL, TXL, NXL, RXL	99-03	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	All Models	04-13	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	DXL90 Serria	00-03	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
70	Viper70	-13	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
50	AXL, TXL, NXL,RXL	99-03	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
	All Models	04-05	_	LT5-3/EB5-3	LTX5L-BS EBX5L-BS	_
KYMCO						
700	MXU700	-14	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
500	MXU500	-14	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
450	Maxxer450	-14	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
300	Mongoose 300	-10	_	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	MXU300SD	All	_	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
250	Mongoose, MXU250	All	_	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
150	MXU150	All	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
90	Mongoose 90	All	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
50	Mongoose 50	All	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
MANCO						
260	8265L	06	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	8264L	05-06	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	8260E, L	04-06	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
72	8089L	05-06	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
POLARIS						
1000	Scrambler	14	MX20-3	_	_	_
850	Scrambler	14	MX20-3	_	_	_
	Sportsman	09-14	MX30-3	_	_	_
800	Sportsman	14	MX20-3	_	_	_
	Sportsman 6x6	14	MX30-3	_	_	
	Sportsman 6x6	05-14	MX30-3	LT30-3/EB30-3	EBX30L-BS	
	Sportsman 4x4	11-13	MX20-3	_	_	_
700	Sportsman, Military	02-10	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B
600	Sportsman	04-05	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B
570	Sportsman	14	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
550	Sportsman	09	MX20-3	_	_	_
	Sportsman EPS,X2, Touring	10-14	MX15-4	LT14A-4 EB14A-4	_	_
	Sportsman Touring,XP,X2	09-10	MX20-3	_	_	_
	Sportsman X2	10-12	MX20-3	_	_	_
	Sportsman XP	10	MX15-4	LT14A-4 EB14A-4	_	_
525	Outlaw 525	08-12	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
500	All Models (Excl.Predator)	99-12	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	Predator	03-06	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	Sportsman	-09	_	_	EBX30L-BS	*LB30L-B
450	Outlaw 450	07-10	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	Diesel .445 Liter(primary)	99-03	MX30-3	LT30-3 EB30-3	EBX30L-BS	*LB30L-B
	(secondary)	99-03	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
425	All models	95-02	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
400	All models	94-14	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
353	Sportsman	98-01	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
330	Magnum Trail Boss	03-13	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_
	Sportsman	-10	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_ _
	ACE	14-15	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_ _
325	All models	87-02	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
300	Hawkeye,Sportman 300	06-10	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-B2
250	All models	85-05	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
200	Phoenix,Sawtooth	05-14	MX30-3	T30-3 EB30-3	LTX12-BS EBX12-BS	_
90	Predator,Sportsman, Outlaw	03-14	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	Scrambler,Sportsman	01-02	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
50	Scrambler	03	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	Scrambler	01-02	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	Predator,Outlaw	04-14	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_ _

ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
DRR						
	All Models		_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
CANNONDALE						
	All Models	01-03	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
BOMBARDIER(Can-Am)						
1000	Outlander 1000, Renegade	12-13	_	LT20-3 EB20-3	_	_
800	Outlander800 EFI ,MAX, Renegade	06-13	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
660	Outlander800 EFI	06	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
650	Outlander, MAX	-13	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	DS650	00-06	_	LT15-3 EB15-3	LTX15L-BS EBX15L-BS	_
	Quest	02-05	_	LT16C-3	LT16CL-BS	*LB16CL-B
	Quest (Opt)	02-05	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	*L50-N18L-A2
500	Outlander, MAX, Rebegade	-13	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	Traxter, Quest	99-05	_	LT16C-3	LT16CL-BS	*LB16CL-B
	Traxter, Quest (Opt)	02-05	MX18-3	LT24-3 EB24-3	LTX18L-BS EBX18L-BS	*L50-N18L-A3
450	DS450	-13	_	LT7B-4 EB7B-4	_	_
400	Outlander400XT, Max	04-13	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	Outlander400	03-04	_	LT15-3 EB15-3	LTX15L-BS EBX15L-BS	_
330	Outlander330	04-05	_	LT15-3 EB15-3	LTX15L-BS EBX15L-BS	_
250	DS250	06-13	_	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
200	Rally	03-06	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
90	DS90, DS90F, Quest	02-13	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
70	DS70	-13	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	
50	DS50, Quest	02-06	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
KTM						
525	SX ATV	10-13	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	XC ATV	10-11	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
505	SX ATV	08-13	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	XC ATV	08-11	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
450	SX ATV	08-11	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	XC ATV	08-09	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
PANDA MOTOR SPORTS						
	125 KD		_	_	LB7-A	_
	KD80		_	_	LB7-A	_
	Kd50		_	_	LB7-A	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
YAMAHA						
700	YFM700FG Grizzly	07-15	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	YFM700R Raptor	06-15	_	LT9B-4/EB9B-4	_	_
660	YFM660FW Grizzly	02-08	_	LT20-3/EB20-3	LTX20L-BS EBX20L-BS	_
	YFM660R Raptor	01-05	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
600	YFM600FW Grizzly	98-01	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
550	YFM5FG Grizzly	-14	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
450	YFM450FG Grizzly	07-14	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_
	YTM450FW Kodiak, Automatic	03-10	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	YFM450FX Wolverine	06-08	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	YZF450	04-13	_	LT7B-4 /EB7B-4	_	_
	YZF450V	-09	_	LT7B-4 /EB7B-4	_	_
	YXF450R,X	09-15		EBZ7-3	_	_
400	YFM400FG Grizzly	07-08	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_
	YFM400FW Kodiak Automatic	03-06	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_
	YFM400FW Kodiak Automatic	96-02	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	YFM400FW Kodiak	93-95	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A1
	YFM400FB BigBear	00-12	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	YFM400FWN BigBear 4WD	00-03	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
350	Bruin	04-06	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_
350	YFM350ER Moto 4	87-95	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A1
	YFM350FW BigBear 4WD	87-99	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	* LB14A-A1
	YFM350FX Wolverine	95-05	_	_	_	*LB12C-A
	YFM350U BigBear 2WD	96-99	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A1
	YFM350X Warrior	87-03	_	_	_	*LB12C-A
	YFP350 TerraPro	88	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	* LB14A-A1
	YFM350FX Wolverine	06-10	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_
	YFM350FG Grizzly	07-14	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_
	YFM350R Raptor	04-13		EBZ10A-4	_	_
250	YFM250B BigBear	07-08	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_
	YFM250B Bruin	05-06	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_
	YFM250R Raptor	08-13	_	EBZ7-3	_	_
	YFB250 Timber Wolf 2WD	92-98	_	_	_	*LB12C-A
	YFB250FW Timber Wolf 4WD	94-00	_	_	_	*LB12C-A
	YFM250 Bear Tracker	99-04	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2 * LB14A-A1
250	YFM250 Moto 4	89-91	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	* LB14A-A1
230	YFU-I/T Pro-Hauler	89	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	

* Must use adaptor kit available from Buell. "*" + "Type" : High performance flooded battery, for example, *LB16-B

ALL TERRAIN VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
YAMAHA						
225	YFM225 Moto 4	86-88	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A1
	YTM225DR Tri-Moto	85-86	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A1
	YTM225DX Tri-Moto	83-85	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A1
200	YFM200 Moto 4	85	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A1
	YFM200DX Moto 4	86-89	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A1
200	YTM200, E,ER Tri-Moto	83-85	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A1
125	YFA-1 Breeze	89-04	_	_	_	*LB12C-A
	YFM125S G	04-08	_	_	_	*LB12C-A
	YFM125R Raptor	11-13	_	EBZ7-3	_	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
YAMAHA						
100	YFM100 Champ	87-91	_	_	_	12N7D-3B
90	YFM90R Raptor	09-13	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
80	YFM Grizzly	05-08	_	_	_	12N7D-3B
	YFM80 Badger	85-01	_	_	_	12N7D-3B
	YFM80R Raptor 80	02-08	_	_	_	12N7D-3B
50	YFM50 Raptor	04-09	_	_	_	12N7D-3B
AEON(BENZAI)						
100	Cobra/CX-Sport 100	All	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
90	Cobra/CX-Sport 90	All	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_
50	Cobra/CX-Sport 50	All	_	LT4-3/EB4-3	LTX4L-BS EBX4L-BS	_

EUROPEAN AND OTHER MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	Battery Type
APRILIA			
1000	ETV Caponord	02-03	LTX14-BS/EBX14-BS■
	RST Futura	01-04	LTX12-BS/EBX12-BS■
	RSV 1000 Mile SP	99	LTX12-BS/EBX12-BS■
	RSV 1000 Factory	04-09	LTX12-BS/EBX12-BS■
	RSV 1000 Mile R	01-05	LTX12-BS/EBX12-BS■
	RSV 1000 Mile	01-09	LTX12-BS/EBX12-BS■
	RSV 1000 Mile	00	LTX12-BS/EBX12-BS■
	Tuono	03-09	LTX12-BS/EBX12-BS■
	SL Falco	01-03	LTX14-BS/EBX14-BS■
850	MANA850	09	LTX14-BS/EBX14-BS■
750	Shiver	09	LTX14-BS/EBX14-BS■
650	Pegaso	00	LB12AL-A
600	Tuareg, Wind	87-88	LB14L-A2■
500	Scarabeo	04-05	LB14L-A2■
	Atlantic	03-05	LB14L-A2■
350	Tuareg, Wind	87-88	LB14L-A2■
250	RS250	00-04	LB4L-B■
200	Atlantic	04-05	LB12AL-A
150	Scarabeo	00-04	LB12AL-A
	Mojito	04-05	LTX7L-BS/EBX7L-BS■
	Leonardo	00-03	LB12AL-A
125	Tuareg, Wind	88	LB9-B
50	RS50	00-05	LB4L-B■
	SR50	00-01	LB4L-B■
	SR50 Ditech	01-05	LTX5L-BS/EBX5L-BS■
	Scarabeo	00-03	LB4L-B■
	Mojito	04-05	LB4L-B■
	Rally	04-05	LB4L-B■
ATK			
	All Electric Start Models	91-95	LTX9-BS/EBX9-BS■
	All Electric Start Models	96-01	LTX7L-BS/EBX7L-BS■

CC	Model	Year	Battery Type
BENELLI			
900	900 (6 Cilindri)		L60-N24AL-B●
650	650 Tornado U.T.		LB12A-A
250	250 (4 Cilindri)		LB12A-A
	250-2C		6N11A-1B
125	125 Cross		6N11A-1B
	125 Custom Guzzi		12N5.5-4A
	125 Guzzi		12N5.5-4A
	125 Jarno (c/avv.)		LB9-B
	125 Scooter Benelli		LB9L-B
	125-2 CSE		6N11A-1B
	125CS		LB9-B
	125T Sport		6N11A-1B
50	Devil 50 (c/avv.)		LB4L-B●
	KBX 50 Race		LB4L-B●
	Scooty LX/DLX		LB4L-B●
BIG DOG			
1750	Boxer	01-02	LTX20L-BS/EBX20L-BS●
	Bulldog	98-02	LTX20L-BS/EBX20L-BS●
	Husky, Husky XT	99-02	LTX20L-BS/EBX20L-BS●
	Mastiff	01-02	LTX20L-BS/EBX20L-BS●
	Pit bull	98-02	LTX20L-BS/EBX20L-BS●
	Prosport,Prosport 18	99-02	LTX20L-BS/EBX20L-BS●
	Vintage- Classic,Light, Sport	99-01	LTX20L-BS/EBX20L-BS●
	Woft	00-02	LTX20L-BS/EBX20L-BS
1570	Vintage- Classic,Light, Sport	99	LTX20L-BS/EBX20L-BS●
1442	AeroglideAerosport	98-99	LTX20L-BS/EBX20L-BS●
	Bulldog	98	LTX20L-BS/EBX20L-BS●
	Pitbull	98-99	LTX20L-BS/EBX20L-BS●
	Prosport,Prosport 18■	98	LTX20L-BS/EBX20L-BS●
	Vintage- Classic,Light, Sport	98	LTX20L-BS/EBX20L-BS●
1340	Aeroglide &Aerosport■	97	LTX20L-BS/EBX20L-BS●

EUROPEAN AND OTHER MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	Battery Type
BIG DOG			
	Coyote	95-96	LTX20L-BS/EBX20L-BS ▪
	Proglide	95-00	LTX20L-BS/EBX20L-BS ▪
	Vintage- Classic,Light, Sport	95-97	LTX20L-BS/EBX20L-BS ▪
BIMOTA			
1100	SB6, SB7	95-97	LTX7L-BS/EBX7L-BS(x2)▪
	SB6R	97-99	LTX12-BS/EBX12-BS▪
1000	YB8/ YB10	92-95	LB14L-A2▪
	YB11	96-99	LTX12-BS/EBX12-BS▪
996	SB8R, SB8RS	98-00	LTX12-BS/EBX12-BS▪
900	DB2	93-95	LB14-A2▪
	DB2 Final Edition	97	LB14-A2▪
	DB3 Mantra	97-99	LTX7L-BS/EBX7L-BS(x2)▪
	Tesi	91-95	LB14-A2▪
BMW			
1200	K1200R,S	05-09	LTX14-BS/EBX14-BS ▪
	R1200GS,S,R	05-09	LTX14-BS/EBX14-BS ▪
	K1200LT		12C16A-3A ▪
	R1200LT,GT	05-09	12C16A-3A ▪
	K1200LT,GT,RS,S	99-05	12C16A-3A ▪
	K1200RS	05-09	12C16A-3A ▪
	K1200RS	97-05	12C16A-3A ▪
	R1200C	98-05	12C16A-3A ▪
	R1200RT	05-09	12C16A-3A ▪
1150	R1150GS, R	00-05	12C16A-3A ▪
1100	R1100LT/RS	90-95	12C16A-3A ▪
	R1100GS	94-00	12C16A-3A ▪
	R1100R	94-00	12C16A-3A ▪
	R1100RS, RT	93-00	12C16A-3A ▪
	R1100S	99-00	12C16A-3A ▪
1000	All 'K' Models	83-93	L60-N30L-A ▪
	R100/7	76-84	L60-N30L-A ▪
	R100GS,PD,R,RS,RT	87-95	L60-N30L-A ▪
	R100CS	76-84	L60-N30L-A ▪
900	R90/6, R90S	69-76	L60-N30L-A ▪
850	R850R	95-97	12C16A-3A ▪
800	F800ST, GS	09	LTX14-BS/EBX14-BS ▪
	R80, R80RT	84-95	L60-N30L-A ▪
	R80GS, R80ST	80-96	12C16A-3B
	R80/7, R80RT	78-84	L60-N30L-A ▪
750	K75, RT	85-95	L60-N30L-A ▪
	K75C, S	85-95	12C16A-3B
	R75/5	70-73	12C16A-3B
	R75/7	76-84	L60-N30L-A ▪
	R75/6	69-76	L60-N30L-A ▪
700	R69 - R69S	55-69	B38-6A
650	F650GS	09	LTX14-BS/EBX14-BS ▪
	F650	93-00	LB12AL-A
	R65	84-95	L60-N30L-A ▪
	R65LS	78-84	12C16A-3B
600	R60, R60/2 Twin Cylinders	55-69	B38-6A
	R60/5	70-73	12C16A-3B
	R60/6, R60/7	69-84	L60-N30L-A ▪
500	R60/2 Twin Cylinders	55-69	B38-6A

CC	Model	Year	Battery Type
BMW			
	R50/5	70-73	12C16A-3B
	R60/S Twin Cylinders	55-69	B38-6A
260	R26, R27 Single Cylinder	55-69	6N11A-1B
	R26		B39-6
BSA			
	250350400,441, 500 (12V)		LB7-A
	600, 650, 750 (12V)		LB7-A
	250, 350, 650 (6V)		B39-6
	500 Gold Star		B38-6A
	Rocket 750,Thunderbolt		LB9L-B
	Spitfire HK35,Starfire B25		LB9L-B
CAGIVA			
900	Elefant E900		LB16B-A1
750	Elefant	94-97	LB16-B▪
	Elefant Bifaro	89	LB14L-A2▪
500	T4 E Elefant	88-	LB14L-A2▪
350	Elefant 2 Cyl.	86-	LB14L-A2▪
	T4 E Elefant, W12	87-	LB14L-A2▪
	T4R	87-	LB3L-A
125	Crouser	87-88	LB9-B
	Freccia C9/ C10R/C12R	87-90	LB9-B
	Lawson	90-97	LB9-B
	Mito	90-97	LB9-B
	N 90	97	LB9-B
	Roadster	94-97	LB9-B
	Supercity	91-97	LB9-B
50	City, Lucky, Explorer	94-97	LTX4L-BS/EBX4L-BS▪
	K3, W4	-98	LB4L-B▪
CAN-AM			
250	Spyder	08-09	LT24-3/EB24-3†
250	All Models	96-01	12N5-4B
175	All Models	96-01	12N5-4B
125	All Models (Except Roadster & Supercity)	96-01	12N5-4B
CCM			
600	All Electric Start Models	96-01	LTX9-BS/EBX9-BS▪
DAZON			
150	Raider-Adventure	02-03	12N5-4B
	Raider- Classic	04	LTX9-BS/EBX9-BS ▪
	Raider-Max	04	LTX9-BS/EBX9-BS ▪
125	Scorpion	04	LTX9-BS/EBX9-BS ▪
50	Diamondback	03-04	LTX4L-BS/EBX4L-BS ▪
	Stinger	03-04	LB7-A
DERBI			
	All Models		LB4L-B ▪
DUCATI			
1200	12, S, Multistrada	07	LT12B-4/EB12B-4
1100	Monster 110	09	LT12B-4/EB12B-4
	1100, S, Multistrada,Hypermotard	07-09	LT12B-4/EB12B-4
	Street Fighter, S	09	LT12B-4/EB12B-4

Please see battery supplier cross reference
Must use factory activated battery
* Part number EBZ10A-4 can be used as an optional upgrade, but spacer from MV must be used.

EUROPEAN AND OTHER MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	Battery Type
DUCATI			
1098	1098	07-09	LT12B-4/EB12B-4
	All Other Models	01-09	LT12B-4/EB12B-4
1000	Desmosedici RR	08-09	LT12B-4/EB12B-4
	Biposto, GT, ST3	07	LT12B-4/EB12B-4
998	998,999	02-07	LT12B-4/EB12B-4
996	Monoposto,Biposto, S	01-07	LT12B-4/EB12B-4
	996, S, SPS	99-00	LB16AL-A2
944	ST2	01-07	LT12B-4/EB12B-4
	Suport Touring 2(ST2)	97-00	LB16AL-A2
916	Biposto, Senna,Strada	94-98	LB16AL-A2
	I.E., SP, SPS	94-98	LB16AL-A2
	Monster S4	01-02	LT12B-4/EB12B-4
	ST4	01-07	LT12B-4/EB12B-4
	ST4	99-00	LB16AL-A2
907	I.E. Paso	90-94	LB16-B▪
906	Paso	90-92	LB16-B▪
900	Monster	01-07	LT12B-4/EB12B-4
	Monster	94-00	LB16AL-A2
	SS Kick-Starter	-81	LB12A-A
	SS Replica	-81	LB12A-A
	SS Supersport,Replica	82-	LB14L-A2▪
	SS	01-07	LT12B-4/EB12B-4
	SL	92-96	LB16AL-A2
	Supersport FE	97-98	LB16AL-A2
888	SP, SP II,SP IV,SP V	90-95	LB16AL-A2
860	GT, GTS		L60-N24AL-B▪
	Kick-Start		LB12A-A
851	Superbike	90-91	LB16AL-A2
	S Superbike	91-92	LB16AL-A2
848	848	09	LT12B-4/EB12B-4
800	800SS	07	LT12B-4/EB12B-4
750	F1, Montijuich, Paso	87-90	LB14L-A2
	GT, Laguna Seca		L60-N24AL-B▪
	Indiana		LB14L-A2▪
	Monster	01-07	LT12B-4/EB12B-4
	Sport	89-90	LB16AL-A2
750	SS Supersport Kick-Str.		LB12A-A
	SS	01-07	LT12B-4/EB12B-4
	SS	90-00	LB16AL-A2
748	Monoposto,Biposto, S	01-07	LT12B-4/EB12B-4
	Strada Biposto,SP, SPS	97-00	LB16AL-A2
696	Monster	09	LT12B-4/EB12B-4
695	Multi str ada	07	LT12B-4/EB12B-4
650	Alazurra, Indiana,Pantah		LB14L-A2▪
600	Monster		LT12B-4/EB12B-4
	Pantah	01-07	LB14L-A2▪
	TL		LB14L-A2▪
500	GTL, GTV		L50-N18L-A3▪
	Pantah		LB14L-A2▪
	Sport		L50-N18L-A3 ▪
GAS GAS			
370	Pampera	97	LTX4L-BS/EBX4L-BS▪
320	Pampera	98- 01	LTX4L-BS/EBX4L-BS▪
250	Pampera	96- 01	LTX4L-BS/EBX4L-BS▪

CC	Model	Year	Battery Type
GILERA			
600	Nordwest	93	LB14L-A2▪
	RC 600C	93	LB14L-A2▪
	Top Rally, XRT		LB14L-A2▪
500	Dakota Kick-Start		12N5.5-3B
	Dakota E-Starter		LB10L-A2
350	Dakota Kick-Start		12N5.5-3B
	Dakota E-Starter		LB10L-A2
	ER Kick-Start		12N5.5-3B
	ER E-Starter		LB10L-A2
	XRT		LB14L-A2▪
250	Arizona Rally		LB10L-B
	RV NGR Kick-Start		12N5.5-3B
	RV NGR E-Starter		LB10L-B
	Arizona		12N5.5-3B
	Arizona		LB9-B
	Fast Bike		12N5.5-3B
	Fast Bike		LB9-B
	RTX, RV, RX Kick-Start		12N5.5-3B
	RTX, RV, RX E-Starter		LB9-B
	T4		12N5.5-3B
	Motocarro		B38-6A
125	Apache Kick-Start		12N5.5-3B
	Apache E-Starter		LB9-B
	Arizona Kick-Start		12N5.5-3B
	Arizona E-Starter		LB9-B
	Crona Kick-Start		12N5.5-3B
	Crona E-Starter		LB9-B
	CX Kick-Start		12N5.5-3B
	CX E-Starter		LB9-B
	Fast Bike Kick-Start		12N5.5-3B
	Fast Bike E-Starter		LB9-B
	Freestyle Kick-Start		12N5.5-3B
	Freestyle E-Starter		LB9-B
	GFR Kick-Start		12N5.5-3B
	GFR E-Starter		LB9-B
	KK, KZ Kick-Start		12N5.5-3B
	KK, KZ E-Starter		LB9-B
	MX1, MXR Kick-Start		12N5.5-3B
	MX1, MXR E-Starter		LB9-B
	Nebraska Kick-Start		12N5.5-3B
	Nebraska E-Starter		LB9-B
	R1, R1S Kick-Start		12N5.5-3B
	R1, R1S E-Starter		LB9-B
	RC Rally		LB10L-B
	RTX,RV,RX Kick-Start		12N5.5-3B
	RTX,RV,RX E-Starter		LB9-B
	SPO1, SPO2 Kick-Start		12N5.5-3B
	SPO1, SPO2 E-Starter		LB9-B
	TopRally Kick-Start		12N5.5-3B
	TopRally E-Starter		LB9-B
	Typhoon		LB7-A
	XR1, XR2 Kick-Start		12N5.5-3B
	XR1, XR2 E-Starter		LB9-B

CC	Model	Year	Battery Type
GILERA (Continued)			
50	Bullit, Easy Moving, Runner	-97	LB4L-B▪
	Eaglet	95-97	LB4L-B▪
	GSA E-Starter		LB4L-B▪
	Runner	-97	LB4L-B▪
	Sioux E-Starter		LB4L-B▪
	Stalker, Storm,Top Rally		LB4L-B▪
	Typhoon	-97	LB4L-B▪
HUSABERG			
	All Electric Start Models	01-02	LTX5L-BS/EBX5L-BS▪
	All Electric Start Models	97-00	LTX9-BS/EBX9-BS▪
HUSQVARNA			
580	TE610E, SM610S	00-01	LTX14-BS/EBX14-BS▪
450	TE450/TC450	09	EBZ7-3
400	TE410E	00-01	LTX14BS/EBX14-BS▪
HYOSUNG MOTORS			
650	GT650,R,S	09	LTX14-BS/EBX14-BS▪
	GV650,SE	09	LT14B-4/EB14B-4
250	GT250,R	09	LTX14-BS/EBX14-BS▪
	GV250	09	LTX9-BS/EBX9-BS
125	XRX125	All	LTX7A-BS/EBX7A-BS▪
KASEA			
125	RX125	All	LTX7A-BS/EBX7A-BS▪
KTM			
1090	RC8	09	EBZ14A-4
990	Super Duke	03-09	EBZ14A-4
	Supermoto	09	EBZ14A-4
950	Adventure	03-09	EBZ14A-4
	Superenduro	09	EBZ14A-4
	Supermoto	09	EBZ14A-4
690	Duke	09	EBZ10A-4
	Supermoto	09	EBZ10A-4
640	Adventurer, Duke,RXC LC4 Super Moto	99-02	LTX9-BS/EBX9-BS▪
	DUKE II, LC4,Adventure	03-08	EBZ10A-4
625	SMC, SXC	03-09	EBZ10A-4
620	Adventure,Duke,LC4	96-98	LTX9-BS/EBX9-BS▪
530	EXC Racing	03-05	EBZ5-3
	EXC Racing(Late05)	05-09	LTX5L-BS/EBX5L-BS▪
	XC-W	09	LTX5L-BS/EBX5L-BS▪
525	525 EXC Racing	05	EBZ5-3
520	E/XC,M/XC Racing 4-Stroke	00-02	LTX4L-BS/EBX4L-BS▪
	E/XC, M/XC Racing 4-Stroke (Opt)	00-02	LTX5L-BS/EBX5L-BS▪
450	EXC Racing	03-05	EBZ5-3
	EXC Racing	05-09	LTX5L-BS/EBX5L-BS▪
	SX-F,XC-F,XC-W	09	LTX5L-BS/EBX5L-BS▪
400	EXC Racing	05-09	LTX5L-BS/EBX5L-BS▪
	EXC Racing	03-05	EBZ5-3
	XC-W	09	LTX5L-BS/EBX5L-BS▪
	EXC Racing 4-Stroke	00-02	LTX4L-BS/EBX4L-BS▪
	EXC Racing 4-Stroke(Opt)	00-02	LTX5L-BS/EBX5L-BS▪

CC	Model	Year	Battery Type
KTM			
	LC4 E/XC	96-98	LTX9-BS/EBX9-BS▪
	RXC LC4	96-01	LTX9-BS/EBX9-BS▪
250	EXC Racing	05-09	LTX5L-BS/EBX5L-BS▪
	EXC Racing	03-05	EBZ5-3
	EXF	05-09	LTX5L-BS/EBX5L-BS▪
MBK			
250	Skyliner	01	LB7L-B
	Skyliner	99-00	EBZ7-3
150	Vertex	99-00	LTX7A-BS/EBX7A-BS▪
125	Doodo	01	LB7L-B
	Flame, Flame R	01	LB7C-A
	Flame, Flame R	95-97	LTX7A-BS/EBX7A-BS▪
	SkylineSkyliner,	01	12N7-3B▪
100	Booster	01	LB4L-B▪
	Booster	99-00	LTX5L-BS/EBX5L-BS▪
	Nitro, Ovetto	01	LB4L-B▪
	Nitro, Ovetto	99-00	LTX5L-BS/EBX5L-BS▪
80	Evolis	95-98	LB4L-B▪
50	Booster	93-97	LB4L-B▪
	Evolis	98	LB4L-B▪
	Flipper, Nitro,Ovetto, Stunt	01	LB4L-B▪
MOTO GUZZI			
1200	Norge	09	LTX20CH-BS/EBX20CH-BS
	Sport, ABS	09	LTX20CH-BS/EBX20CH-BS
	Breva, Griso	05-09	LTX20CH-BS/EBX20CH-BS
1100	Breva, Griso	05-06	LTX20CH-BS/EBX20CH-BS
	1100 California(CA)	03-05	LTX15L-BS/EBX15L-BS▪
	1100 California,Special, Jackal, Stone, EV	94-05	L60-N30L-A▪
	Quota 1100 ES	99-02	LT15-3/EB15-3†
	Sport 1100i	97-99	LT15-3/EB15-3†
	V11 Bassa	99-00	L60-N30L-A▪
	V11 EV	98-99	L60-N30L-A▪
	VII Le Mans, Sport	99-05	LT15-3/EB15-3†
1000	California III	89-93	L60-N24AL-B▪
	Convert		L60-N24AL-B▪
	Daytona		L60-N24AL-B▪
	Le Mans		L60-N24AL-B▪
	Mille		L60-N24AL-B▪
	1000NT		L60-N24AL-B▪
	Quota		L60-N24AL-B▪
	V10 Centauro Sport, GT	99-	LT15-3/EB15-3†
850	Le Man		L60-N24AL-B▪
	T3, T4, T5		L60-N24AL-B▪
750	Breva	04-09	LTX14AHL-BS/EBX14AHL-BS▪
	Nevada		LB18L-A▪
	NTX		LB18L-A▪
	Strada		LB18L-A▪
	V7		L60-N24AL-B▪
	V75		LB18L-A▪
650	NTX		LB18L-A▪
	V65		L60-N24AL-B▪
	V65 Florida		LB18L-A▪

▪ Please see battery supplier cross reference
† Must use factory activated battery
* Part number EBZ10A-4 can be used as an optional upgrade, but spacer from MV must be used.

555 Tiger Head EUROPEAN AND OTHER MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	Battery Type
MOTO GUZZI			
500	Falcone		B38-6A
	Falcone u.t.		LB18L-A▪
	V50		L60-N24AL-B▪
MuZ			
660	Baghira, Mastiff	98	LB9L-A1
	Skorpion	95-01	LB9L-A1
125	All Models	All	LB9L-A1
MV AGUSTA			
1000	F4	05-09	EBZ10A-4
910	Brutale	06-09	EBZ10A-4
750	F4, Brutale	00-08	EB12A-BS*
NORTON			
850	850 Commando,Commando (75)		LB14L-A2▪
750	750 Ranger Commando		LB9-B
350	350 Navigator		6N11A-1B
OZBIKE			
	All Models	All	LTX5L-BS/EBX5L-BS▪
PANDA MOTOR SPORTS			
70	Trail Rider	99-02	LTX4L-BS/EBX4L-BS▪
50	Com-ute	96-02	6N4-2A
	Cub	96-99	LTX4L-BS/EBX4L-BS▪
	Fun Rider	96-02	6N2-2A
	Retro	01-02	LB7-A
36	Com-ute	98-01	6N4-2A
PEUGEOT			
150	Elyseo	98	LB12AL-A
125	Elyseo	98	LB12AL-A
	SV, SV Geo	93-97	LB5L-B
100	Speedfighter,Trakker	98	LTX5L-BS/EBX5L-BS▪
	SV, SV Geo	97	LB5L-B
80	SV, SV Geo	93-96	LB5L-B
50	Buxy, RS	96-97	LB4L-B▪
	Elyseo	98	LB4L-B▪
PIAGGIO-VESPA			
	APE CAR,MP,MPR,P602		L60-N24AL-B▪
	Ape 50 FL	93	LB9-B
	Boxer, Bravo, Ciao		B39-6
	Cosa 2		LB7-A
	Cosa CLX 125(c/cvv.)		LB7-A
	Cosa CLX 150(c/avv.)		LB7-A
	Cosa CLX 200(c/avv.)		LB7-A
	Free		LB4L-B▪
	Hexagon 125/150		LB9-B
	NRG 50		LB4L-B▪
	P125ETES, P125TS		LB7-A
	P200E (c/avv.)		LB9-B
	PK50, PK50-C.A., PK50N, PK50XL		LB7-A
	PK80S-C.A.		LB7-A
	PK125FL, PK125SS,PK125XL▪		LB7-A

CC	Model	Year	Battery Type
PIAGGIO-VESPA			
	PX125▪		LB9-B
	PX125+80E		12N5.5-3B
	PX125+80E-AREC		12N5.5-3B
	PX125+80E-ARC		LB9-B
	PX125T5▪		LB9-B
	PX150E ▪		LB9-B
	PX150E-ARC		LB9-B
	PX200-ARC		LB9-B
	PX200E-ARC▪		12N5.5-3B
	PX200GS▪		LB9-B
	Quartz, Sactto,Sfera 50, Sfera 80,Skipper 125/150		LB4L-B▪
	Vespa 50 Elestart▪		6N11A-1B(x2)
	Vespa 125 Sprint		B39-6
	Vespa 150 GL▪		B39-6
	Vespa 150 FL/ FL2(c/av.)		LB7-A
	Zip - Zip (Fast Rider)		LB4L-B▪
PUCH			
	Cobra 80		B39-6
	Cobra GTL,Daytona NS50,Monza		B39-6
	Lido SL50,Lido Vario		LB4L-B▪
	Monza GP,Monza GX, Monza X		B39-6
ROYAL ENFIELD			
500	All Kick-Start Models	95-99	LB7-A
	All Kick-Start Models	00-03	LB5L-B
	All Electric Start Models	00-03	LB14L-A2▪
350	All Kick-Start Models	95-99	LB7-A
	All Kick-Start Models	00-03	LB5L-B
	All Electric Start Models	00-03	LB14L-A2▪
SYM			
50	Red Devil	01	LTX4L-BS/EBX4L-BS▪
TGB / VINKING			
150	All Models	00	LB4L-B▪
125	All Models	00	LB4L-B▪
90	All Models	00	LB4L-B▪
50	All Models	00	LB4L-B▪
TRIUMPH			
2300	Rocket 3	03-09	LTX20L-BS/EBX20L-BS▪
1200	Trophy	00-04	LTX14-BS/EBX14-BS▪
	All Other Models	93-99	LB14L-A2▪
1050	Tiger	07-09	LT12B-4/EB12B-4
	Triple	05-07	EB12A-BS
	Spirit	05-09	LTX12-BS/EBX12-BS▪
	Speed Triple	05-09	LTX12-BS/EBX12-BS▪
1000	Daytona	92-93	LB14L-A2▪
955	Daytona 955i,Speed Triple, Sprint ST	99-04	LTX14-BS/EBX14-BS▪
	Sprint RS	00-04	LTX14-BS/EBX14-BS▪
	Tiger	02-06	LTX14-BS/EBX14-BS▪
	All Other Models	96-97	LB14L-A2▪
900	Bonneville	06-07	LTX12-BS/EBX12-BS▪

EUROPEAN AND OTHER MOTORCYCLE BATTERY APPLICATIONS

CC	Model	Year	Battery Type
TRIUMPH			
	Scrambler	06-07	LTX12-BS/EBX12-BS ▪
	T90		6N11A-1B
	Tiger	99-01	LTX14-BS/EBX14-BS ▪
	Thruxton	03-07	LTX12-BS/EBX12-BS ▪
	Thunderbird	02-03	LB14L-A2 ▪
	All Other Models	91-01	LB14L-A2 ▪
865	America	09	LTX12-BS/EBX12-BS ▪
	Bonneville T100, SE	09	LTX12-BS/EBX12-BS ▪
	Scrambler	09	LTX12-BS/EBX12-BS ▪
	Speedmaster	09	LTX12-BS/EBX12-BS ▪
800	Bonneville	01-05	LTX12-BS/EBX12-BS ▪
	Speedmaster	03-05	LTX12-BS/EBX12-BS ▪
750	Bonneville, Tiger		LB9-B
	T150 Trident		LB7L-B
	All Other Models	93-97	LB14L-A2 ▪
675	Daytona 675	06-09	LT7B-4/EB7B-4
	Street triple	09	LTX9-BS/EBX9-BS▪

CC	Model	Year	Battery Type
TRIUMPH			
650	T120 Bonneville		LB7L-B
600	600 (12V)		B39-6(x2)
	6T, T20B		6N11A-1B
	Daytona 600	03-05	LTX9-BS/EBX9-BS ▪
	TT600	00-03	LTX12-BS/EBX12-BS ▪
500	500 (12V)		B39-6(x2)
	5TA, TR5A/R		6N11A-1B
350	350 (6V)		6N11A-1B
	350 (12V)		B39-6(x2)
	350 3TA, Twenty One		B38-6A
250	Tigress (6V)		6N11A-1B
	Tigress (12V)		6N11A-1B(x2)
200	Tiger		6N11A-1B
183	Tigress		6N11A-1B
173	Tigress		6N11A-1B
150	Trident		LB7L-B
120	Bonneville		LB7L-B

SNOWMOBILE BATTERY APPLICATION

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
ARCTIC CAT						
	4 Stroke Trail,Touring	02-03	_	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Bearcat 340, 440	95-00	_	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	Bearcat 570	04-07	_	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Bearcat 570	08-09	_	LT20-4 EB20-4#	LTX20-BS EBX20-BS#	*LB18-A
	Bearcat 570	10-14	_	LT20H-4 EB20H-4	_	_
	Bearcat WT	95-02	_	LT20-4 EB20-4#	LTX20-BS EBX20-BS#	*LB18-A
	Bearcat WT	03-04	_	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Bearcat WT	05-07	_	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	_
	Bearcat WT Turbo	06-07	_	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	_
	Cheetah	86-90		EB16B-3	EB16BL-BS	*LB16L-B
	Cheetah	91-93	_	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Crossfire 500	07	_	LT20H-4 EB20H-4	_	_
	Crossfire 600	06-07	_	LT20H-4 EB20H-4	_	_
	Crossfire 700	06	_	LT20H-4 EB20H-4	_	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
ARCTIC CAT						
	Cougar	85-90	_	EB16B-3	EB16BL-BS	*LB16L-B
	Cougar	91-94	_	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Cougar	95-98	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	El Tigre 5000	87-88	_	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	EXT	89-91	_	EB16B-3	EB16BL-BS	*LB16L-B
	EXT	92-94	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	EXT Dix (EFI)	97-98	_	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	EXT (EFI)	95-97	_	_	_	*LB7-A 12N7-4A
	EXT (EFI)	98	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	EXT 600	97-98	_	LT20-4 EB20-4#	L TX20-BS /EBX20-BS#	*LB18-A
	EXT (Carb)	95-96	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	EXT Special	91-92	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	F570，T570，Bearcat	08-14	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	F5 LXR	07-14	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A

▪ Please see battery supplier cross reference

SNOWMOBILE BATTERY APPLICATION

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
ARCTIC CAT						
	F6,F8,F1000	07-09	_	LT20-4/EB20-4	_	_
	F8 LXR, F800, M800, Xr800	07-13	_	LT20-4/EB20-4	_	_
	Firecat	03-06	_	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Jag AFS	89-91	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Jag AFS L/T	89-93	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Jag, Jag Dix	85-93	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Jag, Jag Dix	94-99	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	Jag Liquid	96	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	Jag Z	93	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Jag Z	94	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	Jagular	07	_	LT20H-4 EB20H-4	_	_
	King Cat 900	04-06	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Lynx	91-93	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	M5	06-07	_	LT20H-4 EB20H-4	_	_
	M6	05-07	_	LT20H-4 EB20H-4	_	_
	M7	05-06	_	LT20H-4 EB20H-4	_	_
	Mountain Cat	01	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Mountain Cat 500	02	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Mountain Cat 570	02-04	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Mountain Cat 600	02-04	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Mountain Cat 800	02-04	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Mountain Cat 900	03-04	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Mountain Cat 1000	02	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Pantera	80-85	_	EB16B-3	EB16BL-BS	*LB16L-B
	Pantera	86-93	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Pantera	94	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Pantera	95-98	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Pantera	99-01	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Pantera 550, 600	02-05	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Pantera 800	02-04	_	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Panther	80-88	_	EB16B-3	EB16BL-BS	*LB16L-B
	Panther	89-93	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
ARCTIC CAT						
	Panther	94-96	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	Panther 340	97-00	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	Panther 370	01-04	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	Panther 370	07	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	Panther 440	97-03	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	Panther 550	97-01	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Panther 570	02-07	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Panther 660	06-07	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Powder Extreme	97-98	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Powder Special	95-97	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Prowler	90-93	_	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Prowler	94	_	_	_	*LB7-A 12N7-4A
	Prowler 2-Up	95	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Prowler Special	91-92	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Puma	94-96	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	Sabercat 500	04-06	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Sabercat 600, 700	04-06	_	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Super Jag	87-88		EB16B-3	EB16BL-BS	*LB16L-B
	Super Jag	89-92	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	T660 Touring	04-06	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	T660 Turbo	04-07	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	_
	T660 Turbo Touring	04-07	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	_
	T500, T570	09	_	LT20-4 EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Thundrcat	97-02	_	LT20-4/ EB20-4#	L TX20-BS EBX20-BS#	*LB18-A
	Wildcat (EFI)	93	_	EB16B-3	EB16BL-BS	*LB16L-B
	Wildcat (EFI)	95-96	_	_	_	*LB7-A 12N7-4A
	Wildcat MC	94	_	_	_	*LB7-A 12N7-4A
	Wildcat Touring	95-96	_	_	_	*LB7-A 12N7-4A
	Xf7000, Xf8000, Xf9000, M9000	14	_	LT20H-4 EB20H-4	_	_
	Z	98-01	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2
	Z1,TX1,F1100,M1100, Bearcat Z1	01-14	_	LT20H-4 EB20H-4	_	_
	Z 370, 440	02-07	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-A2

SNOWMOBILE BATTERY APPLICATION

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	ARCTIC CAT					
	Z 570	02-07	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	ZL	01	_	LT20-4 EB20-4#	LTX20-BS EBX20-BS#	*LB18-A
	ZL 500	02	_	LT20-4 EB20-4#	LTX20-BS EBX20-BS#	*LB18-A
	ZL 550, 600	02-03	_	LT20-4 EB20-4#	LTX20-BS EBX20-BS#	*LB18-A
	ZL 800	02-03	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	ZR (EFI)	95-96	_	_	_	*LB7-A 12N7-4A
	ZR 500, 600	01-02	_	LT20-4 EB20-4#	LTX20-BS EBX20-BS#	*LB18-A
	ZR 800	02-03	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	ZR 900	03-06	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A2
	Zr5000, Zr6000, Zr7000, Zr8000, Zr9000	14	_	LT20H-4 EB20H-4	_	_
	ZRT	97-02	_	LT20-4 EB20-4#	LTX20-BS EBX20-BS#	*LB18-A
	BOMBARDIER/SKI-DOO (BRP)					
1200	Grand Touring Expedition	10-13	MX20-3	_	_	_
	Renegade, GSX, GTX, MXZ	09-13	MX20-3	_	_	_
1000	Expedition	03-06	MX18-3	LT24-3 EB24-3	_	_
	Legend	03-06	MX18-3	LT24-3 EB24-3	_	_
	Scandic	03-06	MX18-3	LT24-3 EB24-3	_	_
800	Expedition, Legend Skandic	07-13	_	LT20-3/EB20-3	_	_
	Renegade, Summit Free Ride	04-13	_	LT20-3/EB20-3	_	_
	GSX,MXZ	04-13	_	LT20-3/EB20-3	_	_
600	Expedition,Skandic, Summit	06-13	_	LT20-3/EB20-3	_	_
	Grand Touring Renegade	04-13	_	LT20-3/EB20-3	_	_
	Tundra, MXZ, GSX, GTX	04-13	_	LT20-3/EB20-3	_	_
550	Expedition, Freestyle, Skandic	05-13	_	LT20-3/EB20-3	_	_
	Grand Touring, Renegade, Tundra	-13	_	LT20-3/EB20-3	_	_
	GSX,GTX,MXZ	07-13	_	LT20-3/EB20-3	_	_
300	Skandic	-10	_	LT20-3/EB20-3	_	_
	All models	-98	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	All 4-stroke	03	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	_
	CK3 Types	99-03	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	Elite	04-06	MX30-3	LT30-3/EB30-3	EBX30L-BS	_
	ZX Types	99-01	_	LT15-3 EB15-3	LTX15L-BS EBX15L-BS	_
	ZX Types	02-03	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	KAWASAKI					
	All Models	All	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	L50-N18L-A3
	KASEA					
50	Sense, Prima	All	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	POLARIS					
800	Rush, RMK, Pro, Assault, SWBK	12	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	Rush, Switchback, RMK	11-13	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	Switchback,RMK	-10	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
750	FS Wide Track	10-11	MX30-3	LT30-3/EB30-3	EBX30L-BS	_
	Turbo,LX,IQ	08-14	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	Wide Track	89-09	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	FS/FST	06-09	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
600	IQ	14	_	LT20-3/EB20-3	_	_
	Wide Track Rush, IQ, Shift, Switchback	09-13	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	Turbo Switchback,	06-09	_	LT20-3/EB20-3	LTX20L-BS	_
	Turbo Dragon	06-10	_	LT20-3/EB20-3	LTX20L-BS	_
	Turbo,LX,IQ	08-13	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	IQ Touring	08	MX15--4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	_
	Indy, Indy Trail	84-91	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	All EFI (RXL,500 EFI)	93-97	_	_	_	*LB9A-A
	FS/FST	06-10	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	Sprint (Electric Start)	86-90	_	_	_	*L60-N24-A
	Wide Track,FS	10-13	MX30-3	LT30-3/EB30-3	EBX30L-BS	_
	Wide Track	89-05	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	All Other Models	92-05	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
	All Electric Start Kits	85-93	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	All Electric Start Kits	94-05	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
550	IQ, LXT, Shift	-13	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
544	Trail, Trail Touring	-10	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14A-A2
500	Wide Track	89-14	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	YAMAHA					
1049	FX Nitro	-14	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	RS Venture	-14	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	RS Vector	-14	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	RS Viking Profess	09-13	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
1000	RS1000S,GT,RS,		_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	Apex	06-14	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	RX1000R RX (All Models)	03-05	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
998	Apex	06-09	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
973	Vector	09-14	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
	Viking	09	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_

SNOWMOBILE BATTERY APPLICATION

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	YAMAHA					
700	SXV700ER SXViper ER	02-05	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	VT700 Venture 700	98-04	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	VX700XTCD Vmax 700 XTC Deluxe	98	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	VX700DX Vmax 700 Deluxe	99-00	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	VX700ER Vmax 700 ER	01-02	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
600	VT600 Venture 600	97-98	_	_	_	*LB16AL-A2
	VT600 Venture 600	99-06	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	VX600E/DX Vmax 600 LE/ DX	94-96	_	_	_	*LB16AL-A2
	VX600ER Vmax 600 ER	02-03	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	VX600XTC Vmax 600 XTC	97-98	_	_	_	*LB16AL-A2
	VX600 DX Xmax 600 Deluxe	99-01	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
570	EX570E Exciter	88-90	_	_	_	*LB16AL-A2
	EX570E Exciter II LE	91-93	_	_	LB16AL-A2	_
540	EC540 Excel	79-80	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	VK540E, II, III	89-03	_	_	_	*LB16AL-A2
	XL540 XLV	85-90	_	_	_	*LB16AL-A2
500	Phazer	-14	MX14-4	LT14-4 EB14C-4_ _	LTX14-BS EBX14-BS	_
	Venture Lite	-14	MX14-4	LT14-4_ EB14C-4_	LTX14-BS EBX14-BS	_
	PZ500DX Phazer 500 Deluxe	01	_	_	_	*LB16AL-A2
	VT500 Venture 500	97-01	_	_	_	*LB16AL-A2
	VT500 Venture 500 XL	99-00	_	_	_	*LB16AL-A2
	VX500E Vmax	94-01	_	_	_	*LB16AL-A2

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	YAMAHA					
499	Phazer	09	MX14-4	LT14-4 EB14C-4_ _	LTX14-BS EBX14-BS	_
	Venture Lite	09	MX14-4	LT14-4 _ EB14C-4_	LTX14-BS EBX14-BS	_
480	PZ480E Phazer Deluxe	84-89	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 2N14-3A2
	PZ480E Phazer II LE, SS	90-98	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
	VT480 Venture GT	92-93	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
	VT480 Venture XL	91-97	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
	VT480TR Venture TR Electric	98	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
340	CS340 Ovation Deluxe/ LE	89-98	_	_	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
	EC340 Excel III	81-88	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N14-3A2
	ET340E Enticer	79	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3 2N14-3A2
	ET340E Enticer	80	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
300	CF300 Inviter	86-90	_	_	_	*LB16AL-A2 12N14-3A2
125	SV125E Sno-Sport	90-91	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2 12N7-3B
80	SV80E Sno-Scoot	88-90	_	_	_	*LB7L-B
	Electric Start Kit 8DS Triple	All	MX18-3	LT24-3 EB24-3	LTX24HL-BS EBX24HL-BS	*L50-N18L-A3
	Electric Start Kit 8CR Twin Vmax	All	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Electric Start Kit 8DJ Pz500	All	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2
	Electric Start Kit8BH PZ480 ST, ET410TR	All	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	*LB14L-A2

SCOOTER BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	KYMCO					
500	Xciting 500i	09-14	_	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
400	Xciting 400i	09	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
300	Downtown 300	-13	_	_	EB12A-BS	_
	People GT	-14	_	_	EB12A-BS	_
250	People 250	09	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	Xciting 250I	10-11	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
200	People S 200	-11	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
	People GT	-13	_	_	EB12A-BS	_
150	People S 150	09-13	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
	Super 8 150	09-14	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
	KYMCO					
120	Agility 125	-14	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	People S 125	09-10	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
50	Super 8	09-14	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
	Super 9	09-10	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	People	09-13	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	People S 50	09-10	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
	Agility 50	09-14	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_

The LT20-3/EB20-3 series batteries may be used as an optional upgrade, but some modification to the hold down may be necessary. See battery label for retrofit cautions.

SCOOTER BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
MANCO						
50	5049E	02-06	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	5051L	06	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
DDR						
	All Models		_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
HONDA						
600	FSC600 Silver Wing	02-15	_	EBZ12A-4 EBZ12-4	_	_
300	NSS300 Forza	14-15	_	EBZ12A-4 EBZ12-4	_	_
250	SM250	09-13	_	EBZ12A-4 EBZ12-4	_	_
	CH250 Elite	85-90	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	CN250 Helix	93-09	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	CN250 Helix	86-87	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	NSS250 Reflex	01-09	_	EBZ12A-4 EBZ12-4	_	_
	PS250 Big Ruckus	05-08	_	EBZ12A-4 EBZ12-4	_	_
	PCX	11-13	_	EBZ7-3	_	_
150	NHX110 Elite	10-11	_	LT7-3 EB7-3	LTX7L-BS EBX7L-BS	_
	PCX150	13	_	EBZ7-3	_	_
	PCX150	15		LT7-3 EB7-3	_	_
	CH150 Elite	87	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	CH150 Elite Deluxe	85-86	_	_	_	*LB9-B
	FES150		_	_	LTX9-BS EBX9-BS	_
	SH150	10-12	_	LT7-3 EB7-3	LTX7L-BS EBX7L-BS	_
	SH150	13	_	EBZ7-3	_	_
125	CH125 Elite	84	_	_	_	*LB9-B
	FES125		_	_	LTX9-BS EBX9-BS	_
	NH125 Aero	84	_	_	_	*LB5L-B
	Pantheon 125		_	_	LTX9-BS EBX9-BS	_
	PCX125	11	_	EBZ7-3	_	_
	SH125	10-12	_	LT7-3 EB7-3	LTX7L-BS EBX7L-BS	_
	SH125	13	_	EBZ7-3	_	_
110	NHX110 Elite	10-13	_	LT7-3 EB7-3	LTX7L-BS EBX7L-BS	_
80	CH80 Elite	93-09	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	NH80 Aero	85	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	NH80MD Aero	83-84	_	_	_	*LB5L-B
50	CHF50 Metropolitan,II, SP	02-09	_	EBZ7-3	_	_
	NB50 Aero	85-87	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	NB50M Aero	83-84	_	_	_	*LB4L-B
	NCH50 Metropolitan	13-15	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
HONDA						
50	NN50MD Gyro	84	_	_	_	*LB4L-B
	NPS50, S, Ruckus	03-15	_	EBZ7-3	_	_
	NQ50 Spree,50D SS	86-87	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	NQ50 Spree	84-85	_	_	_	*LB4L-B
	P50 Little Honda	67-68	_	_	_	6N4-2A-4
	PA50I Moped,PA50II	78-83	_	_	_	6N4B-2A-5
	SA50 Elite LX,S, SR	88-01	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	SB50 (All)	88-90	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	SE50 Elite (All)	87	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	TG50 Gyro S (All)	85-86	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
YAMAHA						
530	T-Max	12-13	_	EBZ12A-4 EBZ12-4	_	_
500	XP500T-Max	09-13	_	EBZ10A-4	_	_
400	YP400 Majesty	04-14	_	LT9B-4/EB9B-4	_	_
	Maxam	-13	_	EBZ10A-4	_	_
250	Morphous	06-07	_	EBZ10A-4	_	_
200	XC200 Riva	87-91	_	_	_	*LB10L-B2
180	XC180 Riva	83-85	_	_	_	*LB10L-B
125	YJ125T Vino 125	04-09	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
	XC125 Riva	85-01		_	_	*LB7C-A
	Zume 125	09-15	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
80	CV80 Riva	83-87	_	_	_	6N11-2D
50	JOG,ZR	-13	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	CA50 Riva	83-86	_	_	_	6LB8L-B
	CE50 Riva Jog	86-87	_	_	_	*LB4L-B
	CG50 Riva	88-91	_	_	_	*LB4L-B
	CV50 Riva	84	_	_	_	6LB8L-B
	CW50 Zuma	89-90	_	_	_	*LB4L-B
	CW50 Zuma II	97-01	_	_	_	*LB4L-B
	CV50 Riva Jog	92-01	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	SH50 Riva Razz	87-01	_	_	_	*LB4L-B
	XC50 Vino Classic	06-09	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	XF50W (C3)	07-13	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	Vino &Vino Classic	02-14	_	_	LT4B-BS	_
	YW50A ,F,FX Zuma	02-14	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	VOX	-13	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
PIAGGIO-GILERA						
500	Fuoco 500ie	10-13	_	_	LTX16-BS EBX16-BS^	_
50	Sp50	10-13	_	_	_	*LB4L-B
BMW						
650	C650 GT	11-14	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
600	C600	13-14	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
	C600	11-12	_	EBZ14A-4	_	_

* Must use adaptor kit available from Buell.

“*” + “Type”： High performance flooded battery, for example, *LB16-B

SCOOTER BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
PIAGGIO						
500	Mp3 500	08-13	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	BV500	08-13	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	Fuoco 500ie	10-11	_	_	LTX16-BS EBX16-BS^	_
	Nexus 500ie	10	MX15-3	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	* LB14L-A2
460	X9	09	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
400	MP3 400	08-13	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
300	GTS300	10-11	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	Nexus 300ie	10-11	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
250	GTS250	10-11	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	GTV250	10-11	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	MP3 250	08-09	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
	BV250	08-09	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
200	Runner 200	10-11	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
150	FLY 150	09-13	_	_	_	*LB9-B
	LX50	10-11	_	_	_	*LB9-B
125	Runner 125	10-11	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
50	FLY 50	09-13	_	_	_	*LB9-B
	LX50	10-11	_	_	_	*LB9-B
	SP50	10	_	_	_	*LB4L-B
	Typhoon	09	_	_	_	*LB9-B
SUZUKI						
650	AN650 Burgman	03-14	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
400	AN400 Burgman	03-14	_	_	EB12A-BS	_
50	F50, F50R	71	_	_	_	6N4-2A
	FA50 Shuttle	80-91	_	_	_	6N2-2A-4
	FS50	80-81	_	_	_	6N4-2A
	Fz50	79-83	_	_	_	6N4-2A
PIAGGIO-VESPA						
300	GTS300,GTV300	10-13	MX14-4	LT14-4 EB14C-4	LTX14-BS EBX14-BS	_
150	LX150 4T	-13	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
50	Lx50	10-13	_	_	_	*LB9-B

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
SYM						
250	RV250	10-11	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
200	HD200	10-13	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
125	HD125	10-11	MX9-4	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	Fiddlell 125	10-11	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
50	DD	09	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	Fiddlell 50	10-11	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
	JetEuro 50		_	EBZ7-3	_	_
	MIO50	10-13	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
	MIO50	09	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	RS50	10	_	LT4-3 EB4-3	LTX4L-BS EBX4L-BS	_
	SYMply50	10-11	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
E-TON						
150	Beamer R4-150	-11	_	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
	Matrix R4-150	-11	_	LT9-4 EB9-4	LTX9-BS EBX9-BS	_
50	Sport150	-11	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
	Beamer50,III	00-11	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	Matrix 50	-11	_	LT5-3 EB5-3	LTX5L-BS EBX5L-BS	_
	Sport 50	-11	_	LT7A-4 EB7A-4	LTX7A-BS EBX7A-BS	_
APRILLA						
850	SRV850	12-13	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
500	Scarabeo	09-13	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
250	Sport City	09-13	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
200	Scarabeo	09-13	_	_	_	*LB12AL-A
150	Mojito	09-13	_	LT7-3 EB7-3	LTX7L-BS EBX7L-BS	_
125	Sport City	08-13	_	_	_	*LB9-B
100	Scarabeo ST	09-13	_	_	_	*LB9-B
50	Sport City	08-13	_	_	_	*LB9-B
	Sr50	09-13	_	_	_	*LB9-B

RIDING MOWER BATTERY APPLICATIONS

Model	Battery Type
TRU-TEST	
2-832E5, 6-1036E5,	
3-83DE-5, 7-1036DE-5	
WDE-10365, WDE-8325,	U1-9
WE-10365, WE-8325	

Model	Battery Type
SPEEDEX TRACTOR CO .	
1020, 103, 1240, 1240M,	
1320, 1330, 1632, 1640,	
1640M, 1722, 1822, 820,	
840, S-17, S-18	U1-9

Model	Battery Type
WESTERN INT L. (DYNAMARK)	
320800, 328000, 361000	
361100, 361102... 361107	LB14L-A2.
361113, 361114, 421101,	
456301	LB14L-A2.

RIDING MOWER BATTERY APPLICATIONS

Model	Battery Type
ALLIS-CHALMERS	
405,508	12N9-4B-1▪
608LTD, 611LTD, 611 Special,	
611H, 613, 616 Special, 616H,	
830 Sprint, T811, T816,	
1036 Spirit	U1-9
ARIENS / GRAVELY	
1330,1332,8028,8530	LB14A-A2▪
901000 & 912000 Series	12N12A-4A-1▪
925000 & 927000 Series	12N12A-4A-1▪
929001, 929002, GT17,	
931001, 931006,	
GT20, 931010, 931018, HT16,	
YT10, Yt11	U1-9
ATLAS TOOL & MFG. CO .	
ER2600, ER650, ER2680,	
Er3280	12N9-3A-1▪
BOLENS	
Husky 728, Husky 770,	
Husky 829	LB9-B
BUNTON COMPANY	
32-10BBS, 36-10BBS,	
36H-10BBS	
52-10BBS, 52H-10BBS	U1-9
Lawn Lark 36	U1R-9
CARTER BROTHERS	
EZ-502, EZ-502C, EZ-702,	
EZ-702C	LB12A-A
CASE INTERNATIONAL	
107, 108, 108XC, 110, 110XC,	
116XC, 117, 118, 210, 220,	
222, 226, 442, 448,	
644, 646, 648, 80XC	U1-9
M80	LB12A-A
DEERE & CO .	
100, 108, 111, 112L, 116, 116H	
200, R72, R92, S82, S92	U1-9
DIXIE CHOPPER	
5018,5020,5024,6024	U1-9
E.T. RUGG CO	
5049-E2, 5049-E4,	
5069-E,5088-E	U1-9
ECONOMY TRACTOR	
PK1212	U1R-9
FLOW-MOW MOWER COMPANY	
JETX 2668	U1-9
FORD MOTOR CO .	
LGT100, LGT120, LGT125,	
LGT145, LGT165, LT75,	
RMT66	U1-9

Model	Battery Type
GARDEN WAY / TROY BUILT	
Pony (before 1996)	LB12A-A
Pony (After 1996)	LB9-B
Troy-Built Rototiller	U1-9
GENERAL APPLIANCE MFG. CO .	
All Electric Starters	U1-9
GENERAL POWER	
3-725-E7, 3-725-E8, 3-725-E9	12N12A-4A-1 ▪
WES725, WES725-FS	12N12A-4A-1 ▪
GILSON	
GT14, GT14E, GT14HE	
YT11E, YT11HE, YT12.5,	U1-9
YT12E	
GRAVLEY CORPORATION	
1132, 1138, IHDE-126,	U1-9
IHDE-130, IHSE-126	
408	U1R-9
HEILMAN ENTERPRISES	
11-76, 11-77, 11-78, 8-76, 8-77	U1-9
220, 440, 445, 550, 555	U1R-9
HUFFMAN MFG.CO .(HUFFY)	
H-270, H-360	LB12A-A
HULL INDUSTRIES	
TC30ER	LB16-B ▪
JACOBSEN /HOMELITE/HUSTLER	
42642,43020,43032,43037	LB9-B
43043, Javelin MK11, RE-8E	LB9-B
53107, 53146, 53148, 53200,	
53215, 53275, 53300, 53330	
GT12G, GT12H	U1-9
730-OLE, T-8	U1R-9
JC PENNEY	
931-2703, 931-2737, 931-5730	U1-9
J. I. CASE	
M-80	12N12A-4A-1▪
KEES	
48/60	U1-9
KUBOTA	
B4200, B5100, B5200, B6100,	
B620, B7100	U1-9
G3200, G4200, G5200,	
G6200, Px2100	U1-9
LAWN BOY	
333, 335, 5802, 5803, 7258E	
7259E, 7260E, 8227E, 8228E	
8229E, 8229EA, 8233E	12N9-3A-1▪
9303E, 9325ES, 9328E,	
9328ES, 9365ES, 9368E,	
9368ES	U1-9

Model	Battery Type
LAWN BOY	
9369ES (After 1975)	
9329ES (After 1975)	U1-9
9369ES & 9329ES (Thru 1975)	U1R-9
MINNEAPOLIS-MOLINE	
All Models	U1-9
MONTGOMERY WARD	
99 & Under Series	LB9-B
1300-1400 Series	U1-9
MORIDGE MFG., CO .	
1210, 1622,1822	U1-9
MTD PRODUCTS	
300, 400, 500, 600 Series	
385, 410, 412, 465, 485,	
489,497	LB14L-A2 ▪
387, 397, 455, 485, 495, 497,	
525,667,760	U1-9
500, 525, 526, 600, 698,	
775,795	
796, (395, 760 From 1981)	LB14L-A2▪
700-800 Series	L50-N18L-A3▪
MURRAY OHIO MFG., CO .	
2523, 3033, 3035, 6-30502	
6-30502X4, 6-30702,	
6-30702X4	
7-30502	LB14L-A2▪
NOMA	
321050... 321054, 328000...	
328018	
360100, 36101	LB14L-A2▪
POWER KING	
1212	U1-9
ROOF MFG., CO .	
492683,493081,493071	U1-9
ROOT MFG., CO .	
30-N7-3, 830-E, 30-NB-E	U1R-9
ROPER	
96444, 96927, 96941, K522,	
K852	
L722, L72256R	LB9-B
K9224AR, K922PRA,	
K9324AR	
K932PRA, L8000AT	LB14L-A2▪
SEARS	
502.23365, 50223366,	
502.2561128	U1R-9
502.256050,502.256051	
502.256060... 502.256063	
502.256070,502.256071	
502.256080, 502.256081	12N14-3A2

▪ Please see battery supplier cross reference

RIDING MOWER BATTERY APPLICATIONS

Model	Battery Type
SEARS	
502.256120... 502.256126	
502.256130... 502.256132	12N14-3A2▪
502.2561321, 502.2561576,	
502.2561576	U1R-9
502.256134, 502.256136A	
502.256138,917.255260	12N14-3A2▪
502.25617, 502.25619	U1R-9
502.255270... 917.255273	
502.255330,917.255340	12N14-3A2▪
502.256135,502.25256136	
502.256137, 502.256140	
502.256141, 502.256142	LB16L-B ▪
131.96927, 131.969310	
131.96941,131.96970	12N9-3A-1 ▪
520.25800 (Thru 1966)	
520.25710 (Thru 1966)	
520.25538 (Thru 1966)	U1-9
536.250820...536.250823	
536.25087	
536.250920...536.250922	
536.255110,536.255112	
536.255113,536.255212	
536.255220,536.255221	

Model	Battery Type
SEARS	
536.255230...536.255232	
536.255240,536.255250	
536.657020,536.657040	
536.657060, 536.657080	
536.658080,536.963100	
917.250740,917,255120	12N9-3A-1▪
917.25424,917.25431 ...	
917.25435	
917.25474	U1R-9
917.255121, 917.259180	12N9-3A-1▪
917.25541, 917.25558,	
917.25582	U1R-9
917.25932	12N9-3A-1▪
SIMPLICITY	
3008, 3008-3, 99075	LB9-B
SNAPPER	
All Walk Behind Mowers	
(Electric Start)	LTX4L-BS/EBX4L-BS▪
YARD MAN INC.	
13420,3730	12N9-3A-1▪
Beetle	12N14-3A2▪

Model	Battery Type
VOELLER, INC.	
SS-7	U1-9
WHEEL HORSE / TORO	
108-3, 108-5, 111-5 (1985)	
A85, A115 (1984)	LB14L-A2▪
11-32, 11-38, 11-44	
57300, 57351, 57356, 57360	
7-25, TE10, TE12	
Grandmaster 117	U1-9
WHITE OUTDOOR PRODUCTS	
FST-16	
GT-185, -205, -1000	
LT-125, -155, -160, -165	L50-N18L-A3▪
GT1000, R80, T100, T80,	
T800, T85	U1-9
WOODS	
1250,1850	U1-9
SWISHER	
18Hp/32"	LB12A-A
TURFMASTER	
12/36, 12/39	U1-9

UTILITY VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
KAWASAKI						
950	Mule 5210 Diesel	-10	_	_	_	_
750	Teryx All Models(US)	08-13	_	_	_	*U1-9
	Teryx All Models(CN)	08-13	MX14-4	LT14-4	LTX14-BS	_
				EB14C-4	EBX14-BS	
650	KAF650,Mule 4010 4x4	09	_	LT20-3	LTX20L-BS	_
				EB20-3	EBX20L-BS	
620	Mule4010 Trans4x4,Diesel	-13	_	_	_	*U1-9
	KAF620F,Mule 4010 4x4(US)	-13	_	_	_	*U1-9
	KAF620F,Mule4010 4x4(CN)	-13	_	LT20-3	LTX20L-BS	_
				EB20-3	EBX20L-BS	
	Mule 4000	-13	_	_	_	*U1-9
	Classic	05-07	_	LT20-3	LTX20L-BS	_
				EB20-3	EBX20L-BS	
	KAF620, Mule 3000,	_	_	LT20-3	LTX20L-BS	_
	3010, 3020			EB20-3	EBX20L-BS	
	KAF620, Mule2500, 2510, 2520	_	_	LT16C-3	LT16CL-BS	*LB16CL-B
540	KAF540, Mule 2010,2020,2030	_	_	LT16C-3	LT16CL-BS	*LB16CL-B
450	KAF450, Mule 1000	_	_	LT16C-3	LT16CL-BS	*LB16CL-B
400	KAF400, Mule 600,610	05-13	MX15-4	LT14A-4	LTX14AH-BS	*LB14A-A2
				EB14A-4	EBX14AH-BS	
360	Advantage Classic	03-07	_	LT20-3	LTX20L-BS	_
				EB20-3	EBX20L-BS	
300	KAF300, Mule 500,520,550	_	MX15-4	LT14A-4	LTX14AH-BS	*LB14A-A2
				EB14A-4	EBX14AH-BS	

CC	Model	Year	MX	Factory Activated Maintenance Free	Dry Charged Maintenance Free	Flooded
ARCTIC CAT						
1000	Prowler 1000	-13	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B
	Wildcat 1000,LTD	13	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B
700	Prowler 700	09	MX18-3	LT24-3	LTX24HL-BS	*L50-N18L-A2
				EB24-3	EBX24HL-BS	
	Prowler 700	10-13	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B
650	Prowler 650	06-09	MX18-3	LT24-3	LTX24HL-BS	*L50-N18L-A2
				EB24-3	EBX24HL-BS	
550	Prowler 550	10-13	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B
	Prowler 550	-09	MX18-3	LT24-3	LTX24HL-BS	*L50-N18L-A2
				EB24-3	EBX24HL-BS	
POLARIS						
900	Ranger RZR	11-14	MX30-3	LT30-3/EB30-3	EBX30L-BS	_
800	Ranger RZR	09-13	MX20-3	_	_	
	Ranger RZR 4,S	10-14	MX30-3	LT30-3/EB30-3	EBX30L-BS	_
	Ranger	10-13	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B
700	Ranger 6x6, 4x4	06-10	MX30-3	LT30-3/EB30-3	EBX30L-BS	_
570	Ranger 4x4	14	MX15-4	LT14A-4	LTX14AH-BS	*LB14-B2
				EB14A-4	EBX14AH-BS	
	RZR570,EPS	12-13	MX15-4	LT14A-4	LTX14AH-BS	*LB14-B2
				EB14A-4	EBX14AH-BS	
500	Ranger 6x6, 4x4	11-13	MX15-4	LT14A-4	LTX14AH-BS	*LB14-B2
				EB14A-4	EBX14AH-BS	
	Ranger 6x6, 4x4	04-10	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B
425	Ranger 2x4	02-03	MX30-3	LT30-3/EB30-3	EBX30L-BS	*LB30L-B

UTILITY VEHICLE BATTERY APPLICATIONS

CC	Model	Year	MX	Factory Activated MF	Dry Charged MF	Flooded
POLARIS						
400	Ranger 400	11-14	MX15-4	LT14A-4 EB14A-4	LTX14AH-BS EBX14AH-BS	*LB14-B2
170	Ranger RZR	-14	MX12-4	LT12-4 EB12-4	LTX12-BS EBX12-BS	_
POLARIS						
	Rhino(ALL models)	ALL	_	_	_	_

CC	Model	Year	MX	Factory Activated MF	Dry Charged MF	Flooded
SUZUKI						
620	QUV620F	05	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_
KYMCO						
500	UXV500	-13	_	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	_

PERSONAL WATERCRAFT BATTERY APPLICATIONS

CC	Model	Year	Factory Activated MF	Dry Charged MF	High Performance	Conventional
AQUA-JET CO.						
432	Aqua-Jet Sx1	89-90	EB16B-4	EB16B-BS	LB16-B	–
430	Aqua-Jet Sx1	91	EB16B-4	EB16B-BS	LB16-B	–
ARCTIC CAT						
770	Tiger Shark	97-99	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	LB14L-A2	–
640	Tiger Shark	97-99	LT14A-3 EB14A-3	LTX14AHL-BS EBX14AHL-BS	LB14L-A2	–
BOMBARDIER/SEA-DOO (BRP)						
1500	GTI, RXT	09	_	_	LB30CL-B	–
	GTX 4-Tec, RXP	03-06	_	_	LB30CL-B	–
	All other Models	94-07	LT16C-3	LT16CL-BS	LB16CL-B	–
	All Models	88-93	EB16B-3	EB16BL-BS	LB16L-B	–
HONDA						
1470	Aqua Trax F-15,F-15X	03-09	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
1235	Aqua Trax F-12,F-12X	02-09	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
	Aqua Trax R-12,R-12X	02-09	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
KAWASAKI						
1500	JT1500-A,C STX-15F	04-09	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
	JT1500B, C, 250X,Ultra LX	07-09	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
1200	JH1200-A,B Ultra 150	99-05	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
	JT1200-A, B, C, STX-R, STX-12F	02-07	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
1100	JH1100-B Ultra 130	01-04	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
	Jh1100 ZXi	96-03	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
	JT1100 STX	97-03	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
900	JH900 ZXi	95-97	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
	JT900 STS, STX	97-05	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–

CC	Model	Year	Factory Activated MF	Dry Charged MF	High Performance	Conventional
KAWASAKI						
800	JS800 SX-R	03-09	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
750	JH750 SS, ST,XI, XIR	92-99	LT16C-3	LT16CL-BS	LB16CL-B	–
	JH750 ST, ZXI	95-97	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
	JS750 SX, ZX	92-95	LT16C-3	LT16CL-BS	LB16CL-B	–
	JS750 SXI, SXI PRO	95-02	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
	JT750 XIR, ST, STS	94-95	LT16C-3	LT16CL-BS	LB16CL-B	–
	JT750 STS, STX	96-98	LT20-3 EB20-3	LTX20L-BS EBX20L-BS	–	–
650	JF650 X2	86-95	LT16C-3	LT16CL-BS	LB16CL-B	–
	JF650 TS	89-96	LT16C-3	LT16CL-BS	LB16CL-B	–
	JF650 SC	91-95	LT16C-3	LT16CL-BS	LB16CL-B	–
	JS650 SX	87-95	LT16C-3	LT16CL-BS	LB16CL-B	–
550	JS550, SX	86-95	LT16C-3	LT16CL-BS	LB16CL-B	–
	JS550	82-85	EB16B-3	EB16BL-BS	LB16L-B	–
440	JS440	87-92	LT16C-3	LT16CL-BS	LB16CL-B	–
	JS440	77-86	EB16B-3	EB16BL-BS	LB16L-B	–
400	JS400	76	EB16B-3	EB16BL-BS	LB16L-B	–
300	JS300 TS, SX	86-91	LT16C-3	LT16CL-BS	LB16CL-B	–
YAMAHA						
	All Waverunner Models	87-09	LT16C-3	LT16CL-BS	LB16CL-B	–
POLARIS						
	All Models	All	LT16C-3	LT16CL-BS	LB16CL-B	–
S.O.S. MARINE MFG						
	All Models	All	LT16C-3	LT16CL-BS	LB16CL-B	–
ULTRANAUTICS						
800	Sea Flash	89-92	–	–	L60-N24AL-B	–
	Wet Bike	87-92	–	–	L60-N24AL-B	–
	Wet Bike	85-86	–	–		CHD4-12
	Jet Star 1250 (Boat)	88-90	–	–	L60-N24AL-B	–
	Jet Star 1260 (Boat)	91	–	–	L60-N24AL-B	–
WET JET INTERNATIONAL						
	All Models	All	EB16B-4	EB16B-BS	LB16-B	–

*MF=Maintainance Free

WHAT CAUSES A BATTERY TO FAIL PREMATURELY

SELF DISCHARGE

Antimony Batteries (Conventional 6-Volt and 12-Volt Standard)

Even when the motorcycle is not being used, these batteries discharge (SELF DISCHARGE) at the rate of approximately 0.5 to 1% per week period. The rate of discharge increases with warm temperatures. See the approximate rates of discharge shown in Figure 1 to the right.

Figure 1 Self Discharge - Temperature Comparison

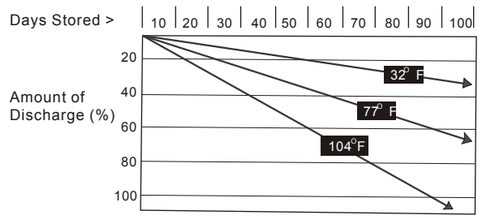

Lead Calcium Batteries (12-Volt Premium High Performance)

The lead/calcium technology motorcycle batteries have a longer life because they hold their charge more than three times as long as the conventional lead antimony batteries. These batteries discharge (SELF DISCHARGE) at a weekly rate of approximately .15 - .3%. See Figure 2 to the right. Some lead/calcium batteries also contain a special chemical that resists sulfation formation on the battery plates.

Figure 2 Self Discharge Rate Calcium vs. Antimony @ 77 °F

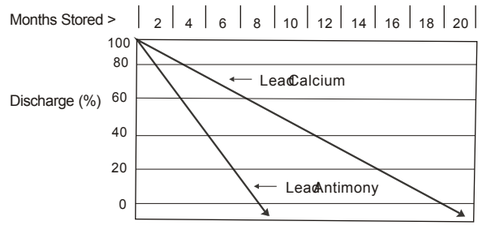

In order to minimize the self discharge of the battery, it is recommended that the battery be placed in a cool (NOT FREEZING) dry location when the motorcycle is not being used.

CURRENT DRAIN

Some big motorcycles (1,000 cc & up) have electric accessories such as clocks, GPS, radios, computer memory and alarm discharge the battery even when the ignition is turned off. The amperage drain of each motorcycle is different depending on the model, year and electric accessories.

Figure 3
The chart below shows how quickly the battery is discharged by BOTH self discharge and current drain.

Figure 3 Self Discharge

Approximate # of Days from 100% full Charged to100% Discharged		
Temperature	Lead Antimony Battery	Lead Calcium Battery
100° F	100 Days	300 Days
77° F	200 Days	600 Days
32° F	550 Days	1,650 Days

Figure 4 Current Drain

Discharging Amperes	Days from 100% Charged to 50% Discharged	Days from 100% Charged to 100% Discharged
7 mA	60 Days	119 Days
10 mA	42 Days	83 Days
15 mA	28 Days	56 Days
20 mA	21 Days	42 Days
30 mA	14 Days	28 Days

Note: If the battery is less that 100% charged when the battery begins standing, the discharge period will be shorter than the time indicated above .

HOW TO PROLONG BATTERY LIFE

ANTI SULFATE Is a chemical that can drastically reduce sulfate crystal build up on battery plate surfaces. This allows the battery to operate longer with optimum performance. All of our Premium, AGM and factory activated batteries have anti-sulfate added.

LOW SELF- DISCHARGE

Self discharge occurs when batteries slowly lose charge when not in service. With the use of special lead alloy grids, self discharge is minimal and the batteries maintain their state-of-charge.

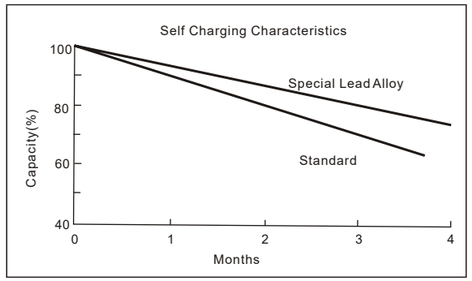

GREATER TERMINAL VOLTAGE

At lower, batteries can supply greater terminal voltage over a longer period of time than conventional batteries as shown below.

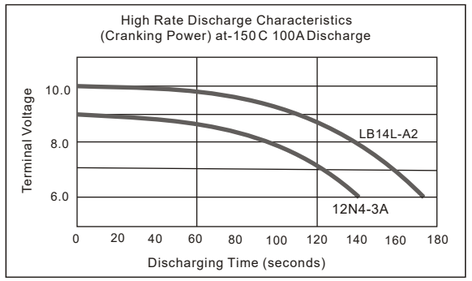

HOW TO DETERMINE BATTERY STATE-OF-CHARGE

To check the battery's state-of-charge you can use one of three methods: 1.) syringe hydrometer 2.) voltmeter or 3.) 5-Ball Hydrometer. See the table below for a comparison between 3 methods to determine the accurate state-of-charge.

State-of-Charge	Syringe Hydrometer	Digital Voltmeter	5-Ball Hydrometer
100% Charged With Anti-Sulfate Additive	1,280 Sp, Gr.	12.80 Volts	5- Balls Floating
100% Charged	1,265 Sp, Gr.	12.60 Volts	4- Balls Floating
75% Charged	1,210 Sp, Gr.	12.40 Volts	3- Balls Floating
50% Charged	1,160 Sp, Gr.	12.10 Volts	2- Balls Floating
25% Charged	1,129 Sp, Gr.	11.90 Volts	1- Balls Floating
00% Charged	Less than 1,100 Sp, Gr.	Less than 11.80 Volts	0- Balls Floating



Note: Results based on a typical battery.

HOW TO STOP ELECTROLYTE FROM FREEZING

Batteries that are fully charged CAN NOT FREEZE. If a battery becomes discharged, the electrolyte can freeze if it is stored below +20 °F. To prevent damage due to freezing, do not allow the battery to become discharged.

The chart below shows temperatures at which electrolyte at various states of charge begin to freeze. These are the approximate temperatures at which ice crystals begin to form. The electrolyte does not freeze solid until a lower temperature is reached. Solid freezing of electrolyte in a discharge battery will damage the battery plates and may crack the battery case. A battery in which the electrolyte has been frozen will not recover to full power and must be replaced.

Specific Gravity of Electrolyte	Battery Voltage		Freezing Temperatures
	12-Volt	6-Volt	
1,280 Sp, Gr.	12.78V	6.39V	-92 °F
1,265 Sp, Gr.	12.66V	6.33V	-71 °F
1,250 Sp, Gr.	12.57V	6.28V	-62 °F
1,200 Sp, Gr.	12.27V	6.13V	-16 °F
1,150 Sp, Gr.	11.97V	5.98V	5 °F
1,100 Sp, Gr.	11.67V	5.84V	18 °F

Note: Results based on a typical battery.

A Battery that is at a 75% state of charge or greater is in no danger of freezing. We recommend that you check your battery voltage every 30 days during the winter.

REASONABLE PRICE
RELIABLE QUALITY
TIMELY DELIVERY
FRIENDLY SERVICE